

# Ledimo Oy

+358456334011 asiakaspalvelu@ledimo.fi www.ledimo.fi

100W/120W/150W/200W











We appreciate your purchase!

Please read the instruction manual before installation and keep it for future reference.



## Warning

- 1. To avoid damage, falling, electric shock or fire, please do not modify the lamp or replace accessories without confirming with the supplier first.
- 2. Please authorize only qualified personnel to install the lamp and ensure they follow the instruction manual. Any improper installation might cause falling, electric shock, fire, or other injury, damage or
- 3. Please disconnect power before installation or any maintenance of the lamp.
- 4. Please disconnect power if it begins to smoke or emit odors, since fire or electric shock may occur. Ask qualified person to inspect and maintain the luminaire.
- 5. Please do not dismantle the lamp without the supplier's authorization.
- 6. Please do not touch the power supply when the lamp is operating.
- 7. If the external flexible cable or cord of the luminaire is damaged, it should only be replaced by the supplier, a service agent or qualified person.




### Application

With unique high-purity die-cast aluminum heat sink, high-brightness SMD chip, high-effciency constant current and constant voltage power driver, the LED high bay is designed for factories, workshops, warehouses, highway toll stations, gas stations, supermarkets, exhibition halls, stadiums and similar applications.

## **X** Technical Parameters

Product Specifications	100W	120W	150W	200W	
Input Voltage	AC100~240V / AC100~277V				
Power Frequency	50 / 60Hz				
CRI	Ra70 / Ra80				
Beam Angle	120°,90°,50°				
IP Rating	IP65				
Outlook Dimensions	Ø350 x 213mm				
Luminaire Net Weight	5.5±0.3kg		5.7±0.3kg		
System Efficacy	130LM/W(CCT=5000K)				
Power Factor	>0.95				
Lifespan	≥50000Hrs(LM70@35°C)				
Working Temperature	-30 ~ +50°C (Motion Sensor: 0 ~ +50°C)				
Working Humidity	15%~90%RH				
Storing Temperature	-40 ~ +70°C				

## \* Installation Instructions

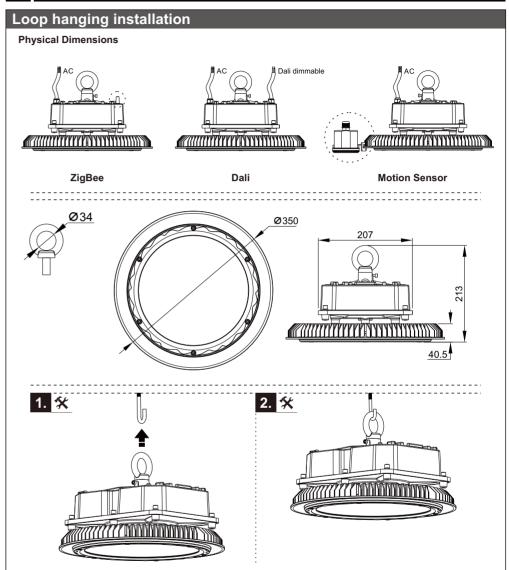

# **Wiring Diagram**



	DALI DIMMADIE				
Da1	brown	purple			
Da2	blue	gray			