



MX-Flood


Advantages

- warranty up to 5 years
- branded lenses precisely illuminating surfaces
- ceramic LEDs, corrosion resistant
- Working temperature -30°C ~ +50°C



Product code	P	lm	K	Ra	IP	Beam angle	Weight
MXFL70401	70	8100	4000K	>70	65	120°	5,2 kg
MXFL70402	70	7600	4000K	>70	65	45°x150°	5,2 kg
MXFL70403	70	7600	4000K	>70	65	60°x160°	5,2 kg
MXFL70404	70	7500	4000K	>70	65	30°x30°	5,2 kg
MXFL70405	70	7000	4000K	>70	65	60°x60°	5,2 kg
MXFL130401	130	15200	4000K	>70	65	120°	5,2 kg
MXFL130402	130	14300	4000K	>70	65	45°x150°	5,2 kg
MXFL130403	130	14300	4000K	>70	65	60°x160°	5,2 kg
MXFL130404	130	14150	4000K	>70	65	30°x30°	5,2 kg
MXFL130405	130	13200	4000K	>70	65	60°x60°	5,2 kg
MXFL175401	175	20350	4000K	>70	65	120°	9,9 kg
MXFL175402	175	19100	4000K	>70	65	45°x150°	9,9 kg
MXFL175403	175	19100	4000K	>70	65	60°x160°	9,9 kg
MXFL175404	175	18900	4000K	>70	65	30°x30°	9,9 kg
MXFL175405	175	17650	4000K	>70	65	60°x60°	9,9 kg
MXFL244401	244	28550	4000K	>70	65	120°	9,9 kg
MXFL244402	244	26850	4000K	>70	65	45°x150°	9,9 kg
MXFL244403	244	26850	4000K	>70	65	60°x160°	9,9 kg
MXFL244404	244	26550	4000K	>70	65	30°x30°	9,9 kg
MXFL244405	244	24800	4000K	>70	65	60°x60°	9,9 kg

Dimensions

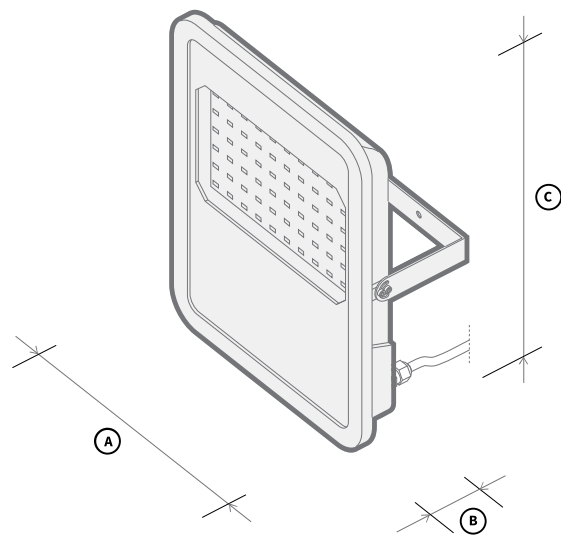

Product code	A	B	C
MXFL 70/130	412	100	434
MXFL 175/244	471	125	502

Mounting



surface mounting



Lighting area

