

LEDICON

FINLAND

UFO 390 Series

Product Features

- Cost effective, Efficient heat dissipation, High lamp efficiency;
- Unique "Patented" Heat Sink for Better Thermal Dissipation.
Light Weight but sturdy and durable Die-Cast Aluminum Housing (No Maintenance Required).
Anti- Corrosion Coating Surface . Quick and Easy Installation with Various Choices.
Optimized Vent Increases Air Convection for Greater Cooling Capacity.
- Professional light distribution, High purity PC Cover.



Model No.: LC-UFO390-100W

LED QTY: 154pcs (3030)
N.W.: ≈ 4.25kg 1pcs
Packing Type: 4 unit(s)/ctn
Inner Packing Dimension: 440x440x225mm 1pcs
Outer Packing Dimension: 895x450x470mm 4pcs
G.W.: ≈ 5.4kg 1 unit(s)/ctn
G.W.: ≈ 22.6kg 4 unit(s)/ctn

Model No.: LC-UFO390-120W


LED QTY: 154pcs (3030)
N.W.: ≈ 4.35kg 1pcs
Packing Type: 4 unit(s)/ctn
Inner Packing Dimension: 440x440x225mm 1pcs
Outer Packing Dimension: 895x450x470mm 4pcs
G.W.: ≈ 5.5kg 1 unit(s)/ctn
G.W.: ≈ 23.0kg 4 unit(s)/ctn

Model No.: LC-UFO390-150W

LED QTY: 210pcs (3030)
N.W.: ≈ 4.35kg 1pcs
Packing Type: 4 unit(s)/ctn
Inner Packing Dimension: 440x440x225mm 1pcs
Outer Packing Dimension: 895x450x470mm 4pcs
G.W.: ≈ 5.5kg 1 unit(s)/ctn
G.W.: ≈ 23.0kg 4 unit(s)/ctn

Model No.: LC-UFO390-200W

LED QTY: 266pcs(3030)
N.W.: ≈ 4.6kg 1pcs
Packing Type: 4 unit(s)/ctn
Inner Packing Dimension: 440x440x225mm 1pcs
Outer Packing Dimension: 895x450x470mm 4pcs
G.W.: ≈ 5.7kg 1 unit(s)/ctn
G.W.: ≈ 23.8kg 4 unit(s)/ctn

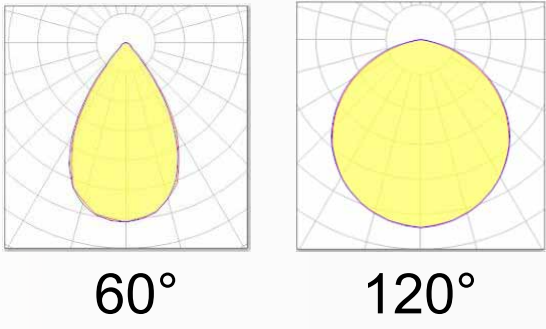


LED By:

Powered By:








COST EFFECTIVE



EFFICIENT HEAT
DISSIPATION



HIGH LAMP
EFFICIENCY



Working Temperature: -40-50°C

Working Humidity: 10%~95%RH

Best Working Temperature: -20 C ~ +30°C


Storage Temperature: -40 C ~ +80 C



Hook with chain
Mounting is standard



Yoke mounting optional

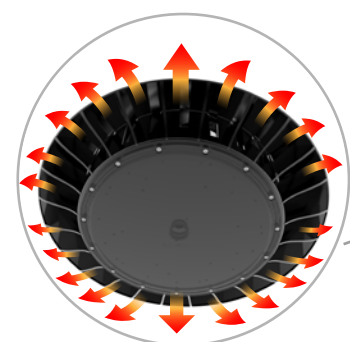

Air-flow heat sink allows for fast air movement the perfect cooling system to ensure the performance and longevity.


Robust die-cast aluminum luminaire body painted in epoxy powder coating in black.

Dust and moisture rating of IP65 per IEC60529 and impact protection of IK10 per EN62262 compliant, ensure long life and protection from the environment.


Rod mounting is optional



MEANWELL driver in 90-305Vac, 50/60Hz. Power factor >95% and THD<15%, IP65/IP67 waterproof . 0/1-10V, DALI etc dimming is available.

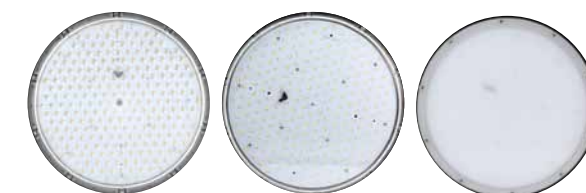

Optics lens in 60° / 120° with over 92% efficiency reduces light loss significantly transparent / frosted optional .



LM80 approved NICHIA/OSRAM/PHILIPS LED is applied for maximum efficiency and long life(calculated L70>50,000h @ Ta=40℃) 3000k-6500K with CRI 70+ /CRI 80+standard, CRI>90 is optional.

FOUR MOUNTING WAYS AVAILABLE



● Ring hook
As standard



● Trestle
As standard



● Chain install
Special customization



● Hanger
Special customization

Intelligent control solutions for your options



ZigBee



Dali




Motion sensor



UFO High Bay with ZigBee controller inside



Computer/ phone/ pad/ Remote controller

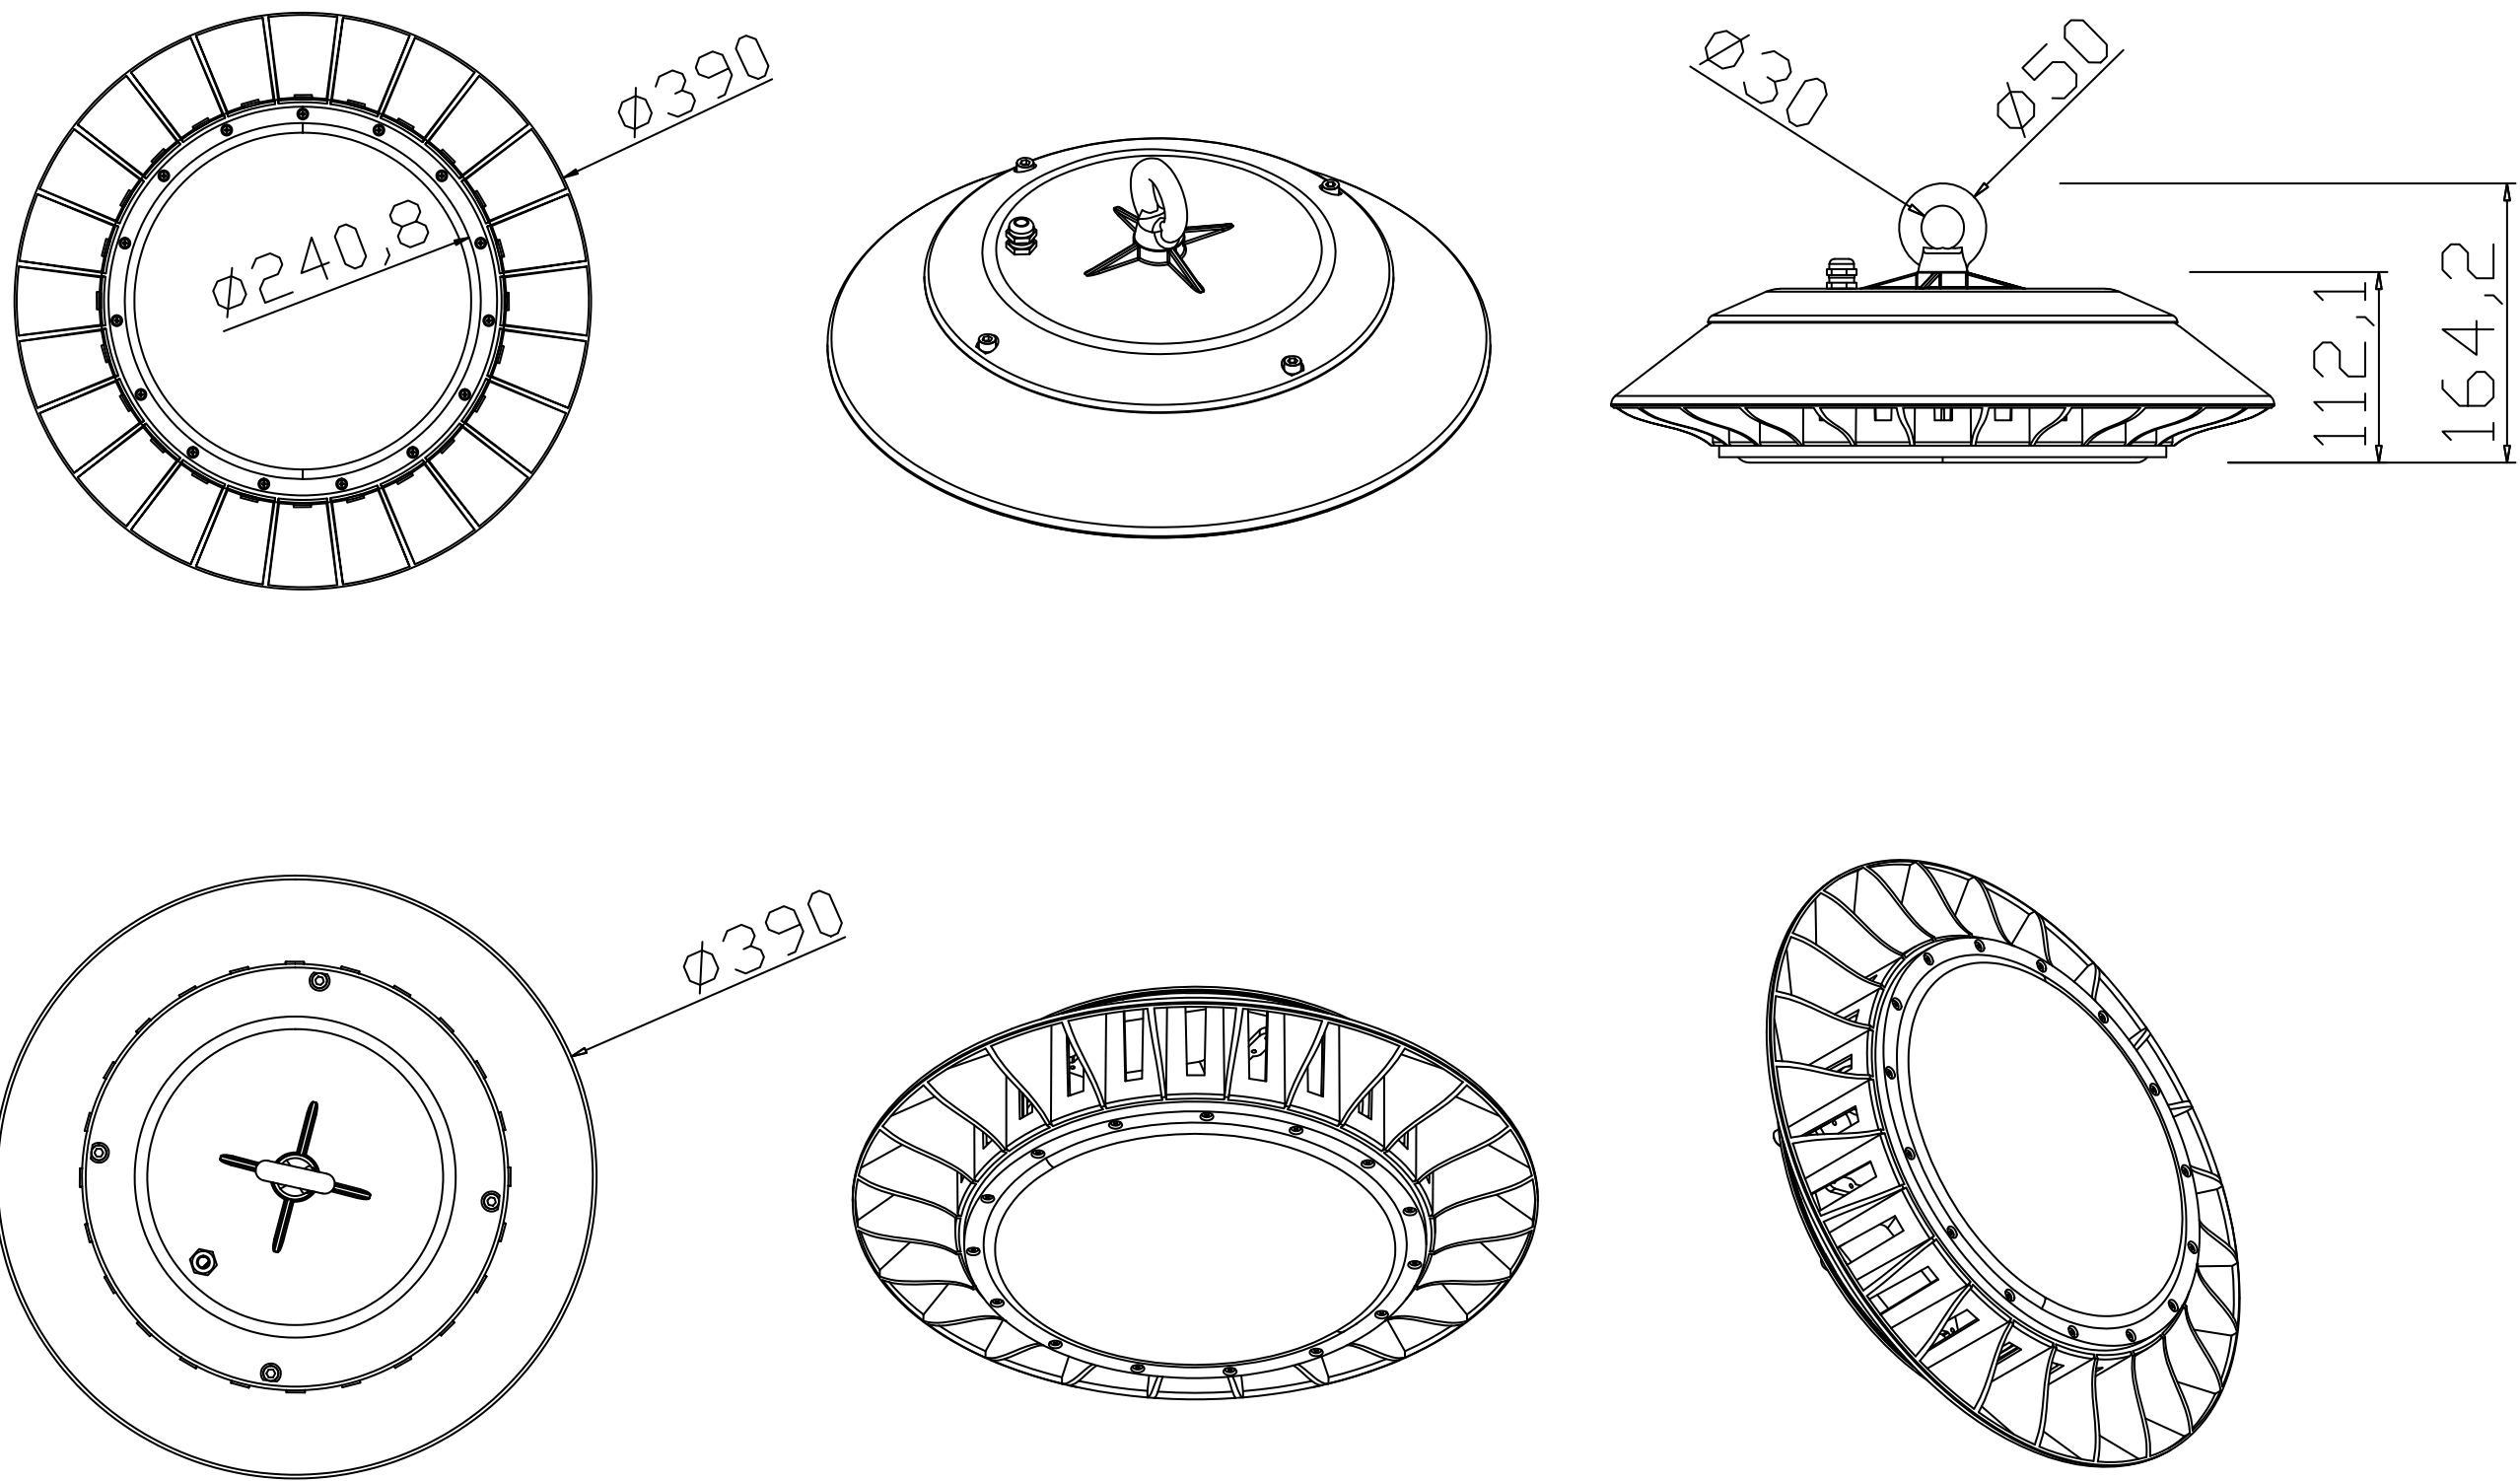

LC-UFO390	LED CHIP MODEL	POWER	LIGHT SOURCE	QUANTITY
-----------	----------------	-------	--------------	----------



>135lm/ W
200W



X 266



>115lm/ W
200W



X 266



>120lm/ W
200W



X266

