


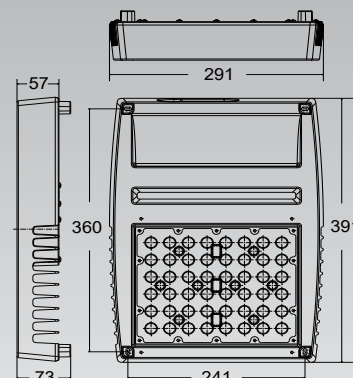

Replay - powerful LED industrial fitting for various application areas.

Description

Body with integrated cooling ribs in high pressure die-cast aluminium, top cover in steel. The fitting is powder coated silver grey RAL 9006. Diffuser in transparent acrylics (PMMA). 6Kv surge protection as standard.

Application areas

Industry facilities, warehouses, department stores, exhibition halls, sport halls etc.

Mounting

Direct on wall or in ceiling

Installation


Driver is integrated in the fitting.
Connection min 3x1mm², max 3x1.5mm².

Others

Available on request with DALI and 1 h emergency kit.
Protection grid, wall/ceiling bracket and recessing cassette, supplied as accessories.
3000K/5000K on request.

Colour index: RA 80
Lifetime: L80B10 60.000h
Ambient temperature Ta 35°C

Fittings each circuit	104W	145W	194W
10A - B	8	5	2
10A - C	13	9	4
16A - B	12	8	3
16A - C	16	13	5




Protection grid



Wall/ceiling bracket



1h emergency kit



Recessing cassette 591 x 591 mm

Number	Type	Optics	Light source			Weight
122065	Replay	Wide beam 120°	36 LED-13930lm	99W	4000K	7,2 kg
122052	Replay	Wide beam 120°	36 LED-17953lm	145W	4000K	7,2 kg
122053	Replay	Wide beam 120°	48 LED-23937lm	194W	4000K	8,0 kg
228643024	Replay	Medium beam 90°	36 LED-14076lm	104W	4000K	7,2 kg
228643036	Replay	Medium beam 90°	36 LED-18247lm	145W	4000K	7,2 kg
228643048	Replay	Medium beam 90°	48 LED-24329lm	194W	4000K	8,0 kg
229643024	Replay	Asymmetric	36 LED-13207lm	104W	4000K	7,2 kg
229643036	Replay	Asymmetric	36 LED-17121lm	145W	4000K	7,2 kg
229643048	Replay	Asymmetric	48 LED-22828lm	194W	4000K	8,0 kg

Accessories:

922700001	Protection grid
922701000	Wall/ceiling bracket
Nummer + 01	1h emergency kit
922700002	Recessing cassette 591 x 591 mm