


- 
-
- 
- ATTENTION**
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

	LED50S	LED70S	LED39S
I _{peak} [A]	20	40	25
T _{ref} [μs]	150	100	50
Max. Nr of products			
Drivers / MCB 16A type B [max.]	30	18	30
Drivers / MCB 10A type B [max.]	24	15	24
Drivers / MCB 16A type C [max.]	34	24	38
Drivers / MCB 10A type C [max.]	24	15	24



This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your use device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.



© 2012 Signify Holding.
 This document contains information relating to the product portfolio of Signify which information may be subject to change. No representation or warranty as to the accuracy or completeness of the information included herein is given and any liability for any action in reliance thereon is disclaimed. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.. All other trademarks are owned by Signify Holding or their respective owners.

Signify Holding.
The Netherlands




CoreLine Tubular Waterproof

WT210C

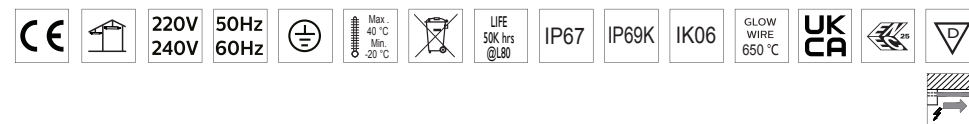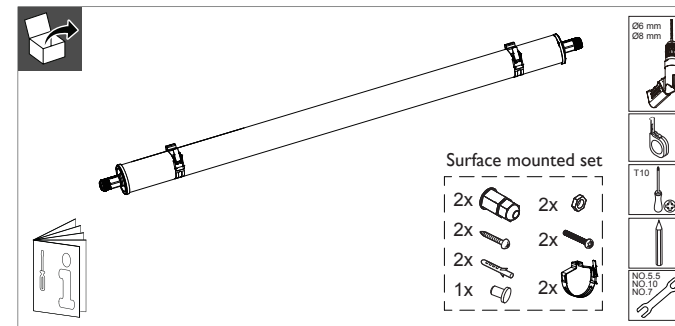


	System light output (lm)	Colour temperature (K)	Power (W)	Energy efficiency class of light source	 kg
WT210C LED50S/840 PSU TWI PMMA LI200	5000	4000	39	D	1.2
WT210C LED70S/840 PSU TWI PMMA LI1500	7000	4000	54	D	1.5
WT210C LED39S/840 PSU TWI PMMA LI1500	3900	4000	28	D	1.5

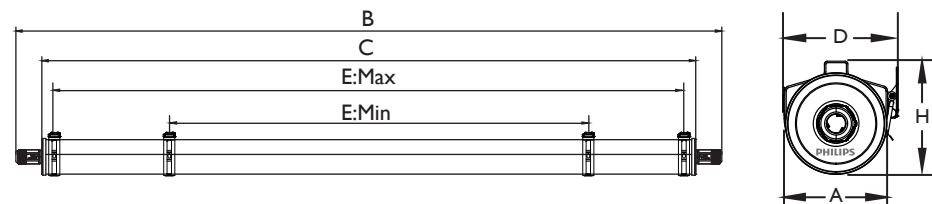

Luminaire type	Dimensions (mm)						
	A	B	C	D	H	E:Min	E:Max
WT210C LED50S/840 PSU TW1 PMMA LI200	Φ69	1340	1234	78	77	700	950
WT210C LED70S/840 PSU TW1 PMMA LI500		1640	1534	78	77	1000	1250
WT210C LED39S/840 PSU TW1 PMMA LI500		1640	1534	78	77	1000	1250


Suspension mounting set (Indoor)

12NC/Description 911401867784 WT210Z SW2 EOC short: 95610099



Suspension mounting set (Indoor/Outdoor)

12NC/Description: 911401867884 WT210Z SC EOC short: 95611799



Printed in China
Data subject to change without notice
Keep for future reference: www.philips.com/lighting

