



CoreLine Waterproof

WT120C G2 LED80S/840 PSU TW3 L1500

Coreline Waterproof G2 LSC - 840 neutral white - Power supply unit

CoreLine waterproof delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. CoreLine waterproof products can directly replace traditional waterproof luminaires with fluorescent lamps ranging from 18W up to 58W. With its slim and stylish design, it continues to keep its well-known and appreciated architecture. Installation is quick and easy, all thanks to its efficient design. CoreLine waterproof provides better wide-beam light distribution for straightforward and effective lighting. Interact Ready luminaires with integrated wireless communications are also available in this range, ready to be used with Interact gateways, sensors and software.

Product data

General Information			
Light source color	840 neutral white	CE mark	CE mark
Light source replaceable	No	ENEC mark	ENEC mark
Number of gear units	1 unit	Warranty period	5 years
Driver/power unit/transformer	Power supply unit	Constant light output	No
Driver included	Yes	Number of products on MCB of 16 A type B	30
Optic type	Beam angle 110°	RoHS mark	-
Luminaire light beam spread	105°	Service tag	Yes
Control interface	-	Product family code	WT130C [Coreline Waterproof G2 LSC]
Connection	Push-in connector 5-pole	Unified glare rating CEN	25
Cable	-	Operating and Electrical	
Protection class IEC	Safety class I	Input Voltage	220 to 240 V
Glow-wire test	Temperature 850 °C, duration 30 s	Input Frequency	50 or 60 Hz
Flammability mark	For mounting on easily flammable surfaces	Inrush current	6.9 A

CoreLine Waterproof

Inrush time	0.058 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Steel
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Stainless steel
Optical cover/lens finish	Opal
Overall length	1515 mm
Overall width	80 mm
Overall height	76 mm
Color	Gray

Approval and Application

Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	8000 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	131.15 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80

Initial chromaticity	(0.43, 0.40) SDCM <3
Initial input power	61 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	1.75 %
Lumen maintenance at median useful life* 50000 h	L75

Application Conditions


Ambient temperature range	-10 to +35 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Not applicable

Product Data

Full product code	871869940930200
Order product name	WT120C G2 LED80S/840 PSU TW3 L1500
EAN/UPC - Product	8718699409302
Order code	910505100077
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910505100077
Net Weight (Piece)	1.820 kg




Dimensional drawing

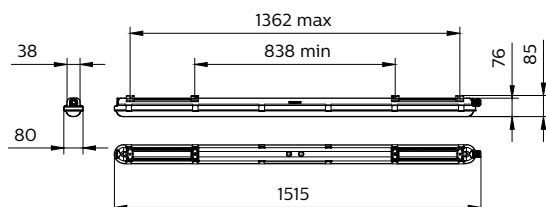


CoreLine Waterproof WT120C

Photometric data

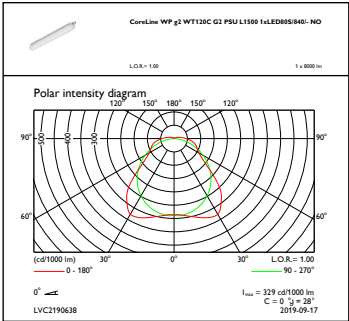

OFPC1_

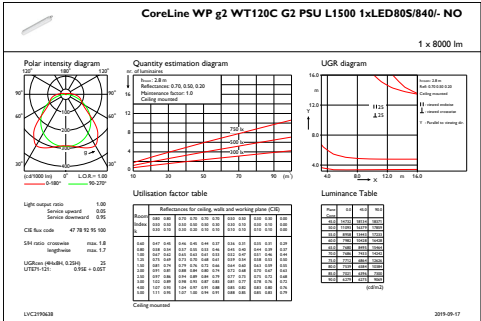

IFGU1_

