

TRIANO *disc* LED High Bay Fitting Series 3410/3420/3430...

Applications:

Production and storage halls in trade and industry, maintenance halls, assembly plants, cold rooms, cold stores, hardware stores, rack aisles in warehouses, etc.

Design:

Robust die-cast aluminum body with cooling fins and integrated ECG housing. 1-3 LED-modules with flat safety glasses, Impact resistance IK09. Versions **B**, **TB** or **T** with PC-cover and incorporated optics.

All case parts powder coated in DB 702, smooth, matt.

Light distribution: Without optics wide beam, with optics wide (B), narrow-wide (TB) or narrow beam (T).

Connection: 3-pole (DIMD 5-pole) quick-connector (**FastConnect**), plug mounted to the ECG-housing, socket included.

Mounting: 1-point suspension, eyelet included.

Delivery status:
1 part, ready for immediate use.

Technical Data:

LED module: 5,000K, CRI > 80, lifetime L_{80} > 100,000h at 25°C ambient temperature, lifetime L_{80} > 80,000h at max. ambient temperature

ECG: 220-240V, 50/60Hz, Surge voltage resistance 4kV, overload and short circuit protection.

On request, the luminaires are also available with the following configurations:

Digital dimming with DALI interface (DIMD) compatible with LIMAS Line and LIMAS Air Light Management System.

Constant luminous flux function (CL): Luminous flux is kept on a constant level over the entire lifetime of the LED-modules.

Ambient temperature: -20°C up to +45°C/+50°C

Options:

- 4.000K, light-colour **840**
- for connection to group or central battery systems (ZB) or emergency mains respectively (100% luminous flux in emergency mode)
- ball sports proof version (only Series 3420)





- PC cover for versions without optics, for use in food areas (IFS Food); (-6% Luminous flux)
- PMMA cover with prismatic structure to limit glare (20% lower luminous flux)
- with swivel bracket for ceiling or wall mounting



Product highlights:

- fast mounting and commissioning due to 1-point suspension and FastConnect quick-connector
- highly efficient up to 161 lm/W
- Excellent thermal management through cooling fin structure and direct connection of the LED modules to the housing. Huge heat sink, excellent heat dissipation, excellent convection.
- high system lifetime of up to 100,000h (25°C), >70,000h at maximum ambient temperature
- colour reproduction CRI > 80, according to the workplace guide lines suitable for nearly all plant locations
- ∇-symbol, suitable for rooms with increased fire risk
- uniform illumination due to the „Multi-Layer Technology“ i.e. every individual LED illuminates the whole surface, the light curves of the individual LEDs are overlapping.




3410 ...



3420 ...

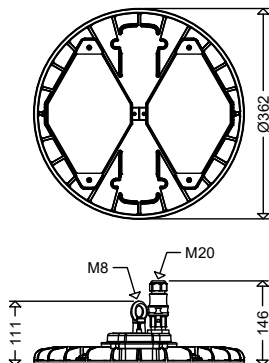

3430 ...

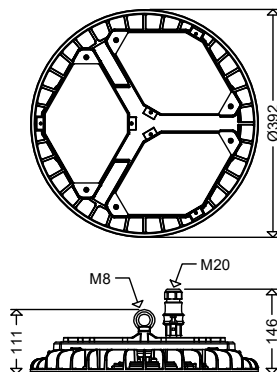

Properties, limitations and details for controlling LED-light fittings:

See "Technical Supplement"

All data are correct at the time of printing. Actual technical data can be found under www.schuch.de.

Versions with PC optics (B, TB and T) can be used without restrictions in food areas (IFS-Food).

3410...



3420...



3430...




Photo: 3430 L 300 DIMD with LIMAS Air radio module



LIMAS Air FM




LIMAS Air FM MK



Article no.	Type	Quantity of ECG	Dimmable	Wide beam	Narrow wide beam	Narrow beam	Tmax [°C]	Weight [kg] (without packing material)	Power consumption [W]	Luminous flux [lm]	Light output [lm/W]	Substitute for *
-------------	------	-----------------	----------	-----------	------------------	-------------	-----------	-------------------------------------------	-----------------------	--------------------	---------------------	------------------

3410/3420/3430...



34100 0001	3410 L100 D	1	•				50	2,2
34100 0002	3410 L100 D DIMD	1	•	•			50	2,2
34100 0003	3410 L100B D	1		•			50	2,1
34100 0004	3410 L100B D DIMD	1	•	•			50	2,1

65 10.000 154 HME250

34200 0001	3420 L200 D	1	•				45	2,9
34200 0002	3420 L200 D DIMD	1	•	•			45	2,9
34200 0003	3420 L200B D	1		•			45	2,8
34200 0004	3420 L200B D DIMD	1	•	•			45	2,8
34200 0005	3420 L200TB D	1			•		45	2,8
34200 0006	3420 L200TB D DIMD	1	•		•		45	2,8

112 18.000 161 HIT250/HME400/
HIE 400 (HI-VG)

34300 0001	3430 L300 D	2	•				45	4,2
34300 0002	3430 L300 D DIMD	2	•	•			45	4,2
34300 0003	3430 L300B D	2		•			45	4,0
34300 0004	3430 L300B D DIMD	2	•	•			45	4,0
34300 0005	3430 L300TB D	2			•		45	4,0
34300 0006	3430 L300TB D DIMD	2	•		•		45	4,0
34300 0007	3430 L300T D	2				•	45	4,0
34300 0008	3430 L300T D DIMD	2	•			•	45	4,0

195 30.000 154 HIE400 (HS-VG)/
HIT400

* The given information is for rough orientation only. In each individual case a lighting calculation is necessary. (VG = ballast)



LIMAS Air - Smart lighting control

Applications:

Areas where luminaires are to be intelligently controlled to lower operating costs and reduce CO₂ emissions.

Design:

CASAMBI® radio module with FastConnect quick-connector for easy plugging onto DIMD luminaires.

Article No.	Type	
90547 9001	LIMAS Air FM	CASAMBI® radio module with FastConnect quick-connector for controlling DIMD luminaires
90547 9002	LIMAS Air FM MK	CASAMBI® radio module with FastConnect quick-connector and 1m cable

Explanations of the Light Management System LIMAS Air and the system components (sensors, switches, push-buttons, etc.) can be found at the beginning of the chapter „High Bay Fittings“.

Accessories / Spare Parts

Article no.	Type	
34011 9001	3401/010	spare safety glass, for 1 LED-module
34011 9003	3401/011 PRA	PMMA spare cover, prismatic structure for 1 LED-module
34011 9002	3401/010 IFS	PC cover without optics for 1 LED-module for versions IFS
34011 9004	3401/012 B	PC spare cover with wide beam optics for 1 LED-module, version B
34011 9005	3401/012 TB	PC spare cover with narrow-wide beam optics for 1 LED-module, version TB
34011 9006	3401/012 T	PC spare cover with narrow beam optics for 1 LED-module, version T