

ClearWay BGP303

Mounting instruction

Instructions de montage

Montageanleitung

Montage instruktio

Istruzioni di montaggio

Instrucciones de montaje

Instruções de montagem

Monteringsinstruktioner

Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet

Montaj yönergesi

Návod k montáži

Instrukcja montażu

Szerelési utasítások






	LUMEN FLUX	W	kg	Maximum number of luminaire on MCB 16A	EN 30
LED49	4900	57	7,5	10	■
LED73	7300	82	7,5	10	■
LED98	9800	106	7,5	10	■
LED122	12200	131	7,5	10	■




Disconnect before servicing
Mettre hors tension avant intervention
Öffnen nur spannungsfrei
Demonteren voor onderhoud
Togliere tensione prima di fare manutenzione
Desconectar antes de manipular
Bryt strömmen före lampbyte




Version	Voltage	Inrush Current Peak	Inrush Current
PSU	230V	105A	160us
PSR	230V	120A	277us




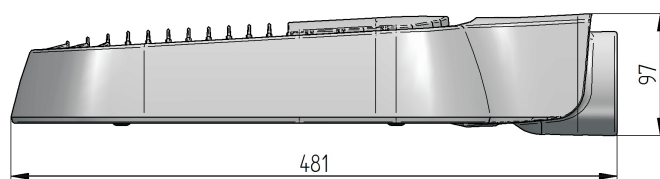
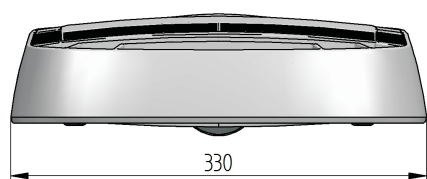


Scx 0,016 m²
max.




Scx 0,029 m²
max.

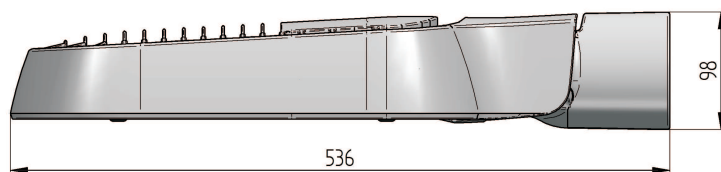


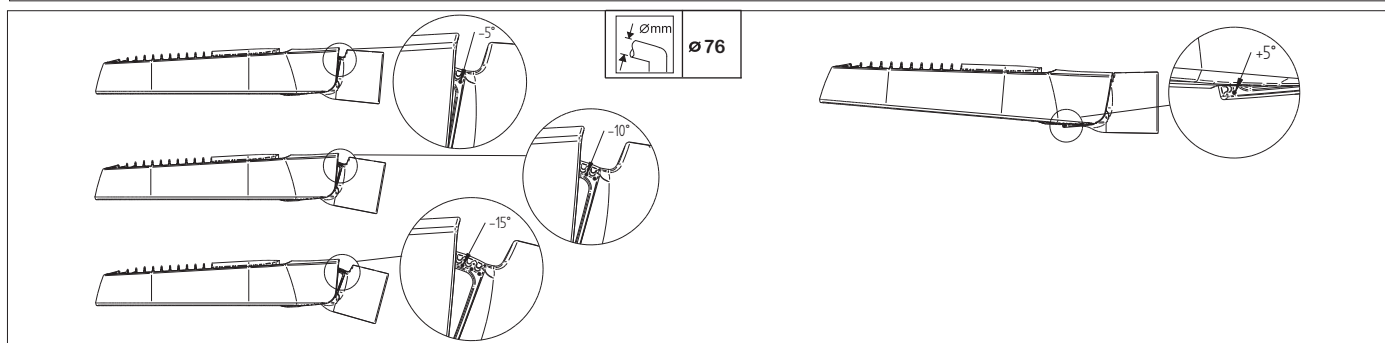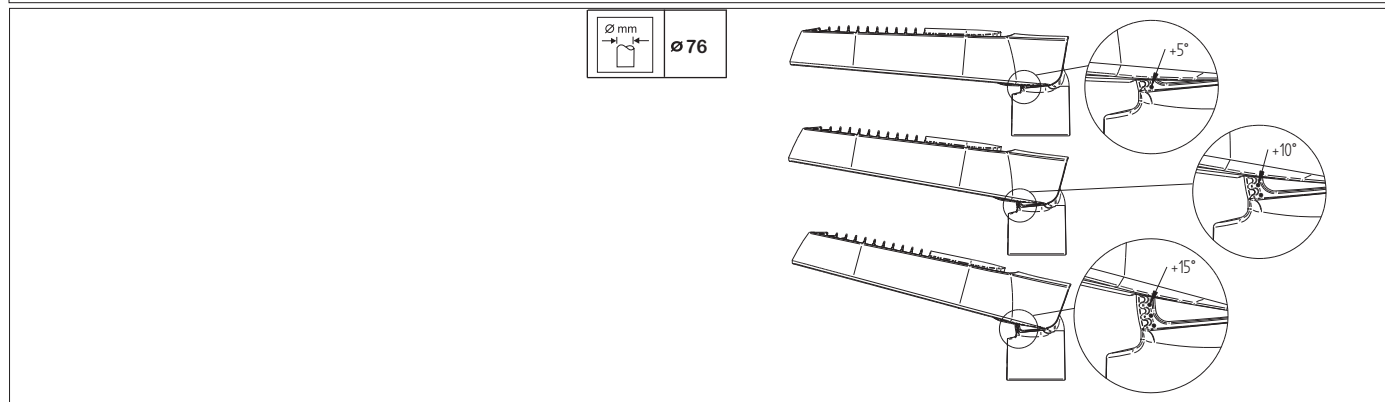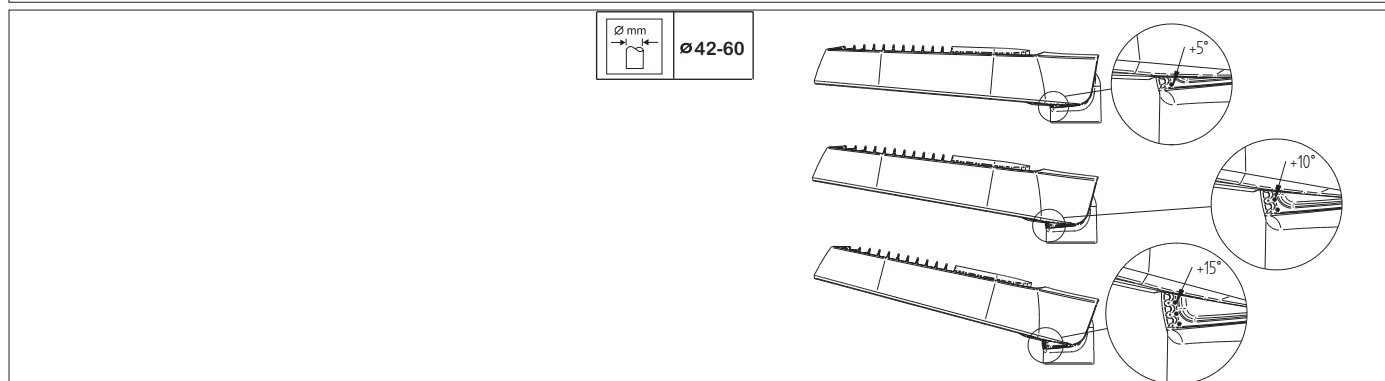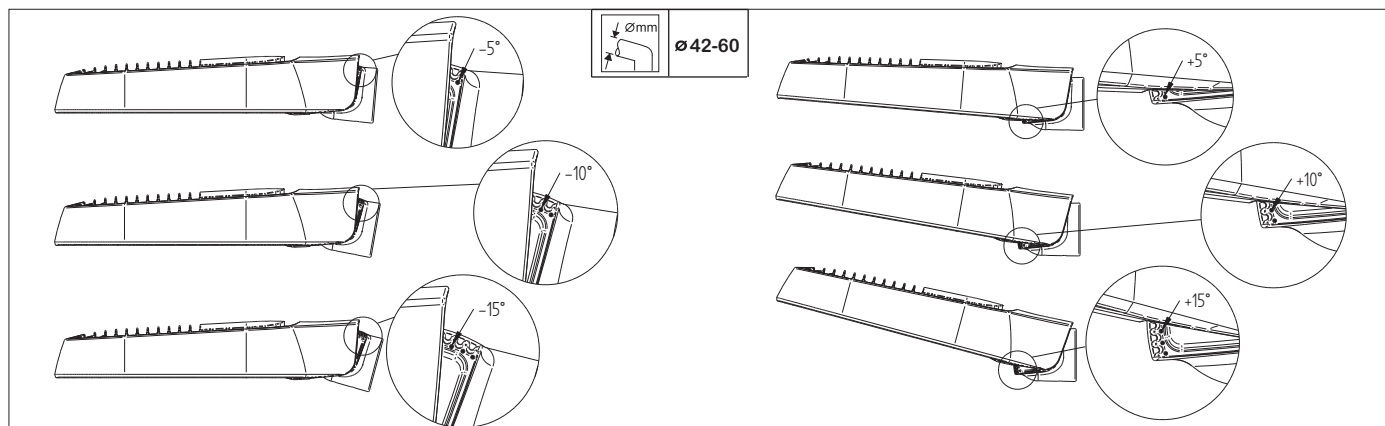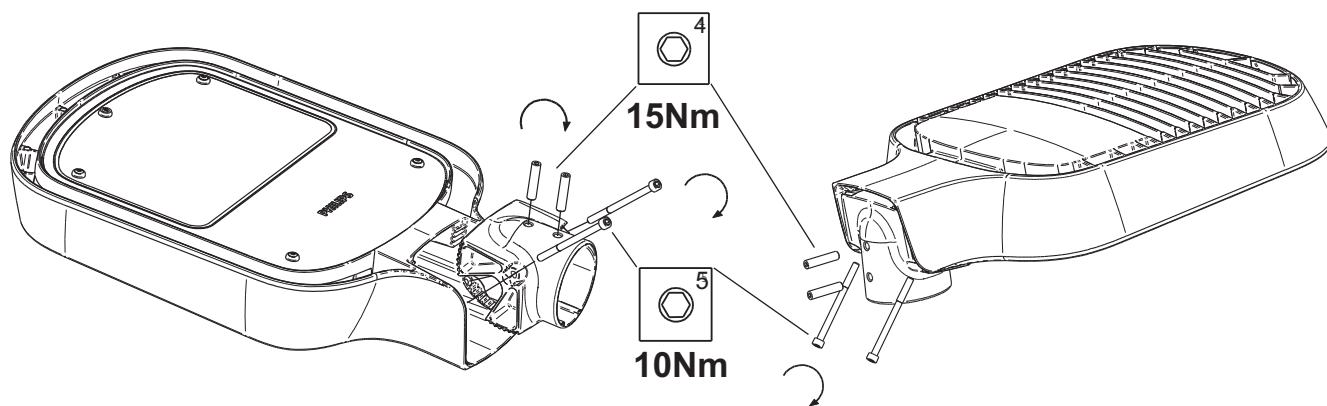


1

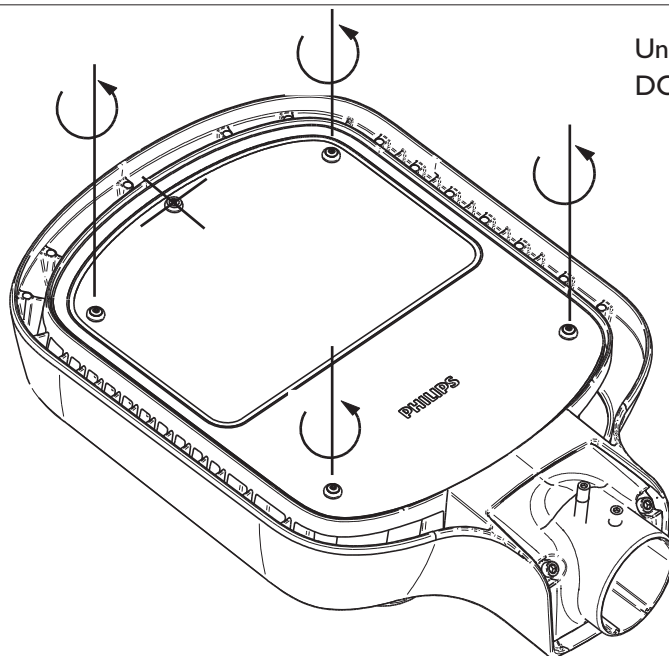


Unscrew only 4 glass fixation screw, but
DO NOT REMOVE THEM!!




2

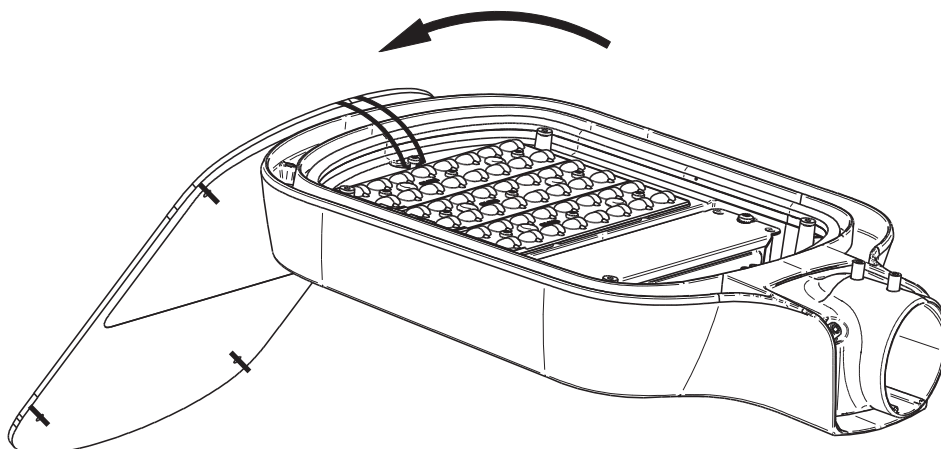

3

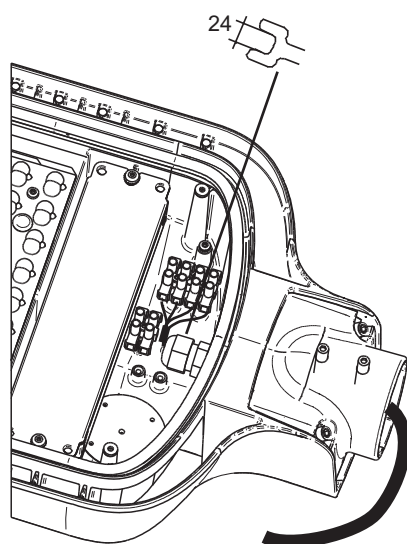

3a


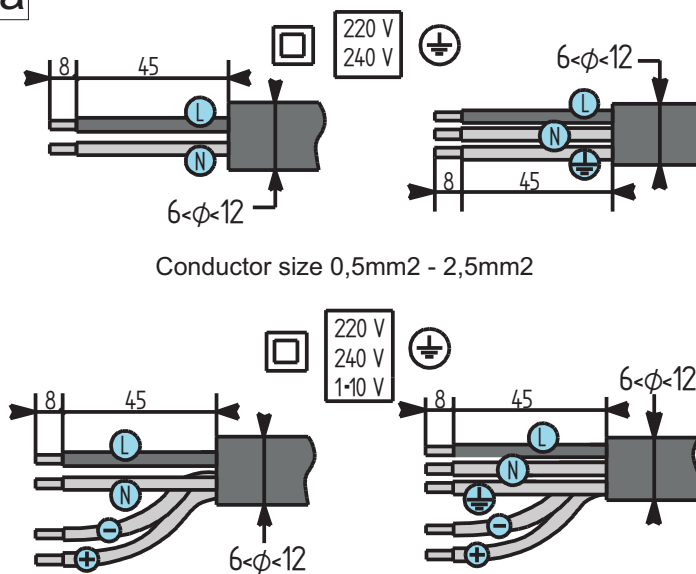


DRIVER WIRE COLOURS:
(1-10V) - GREY [-], VIOLET [+]
(DALI) - VIOLET, VIOLET/WHITE



4


4

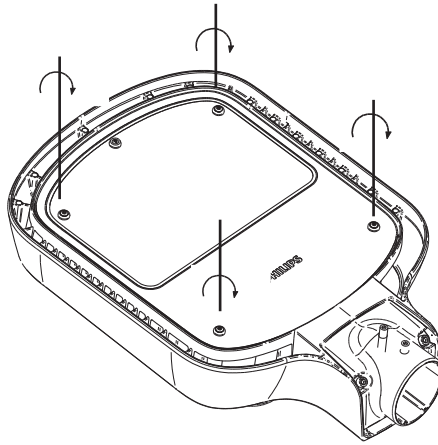

1,5Nm

Before screw in make sure that the gasket is properly installed !!

B.Version with IP connector [C450C2/3/4/5]:

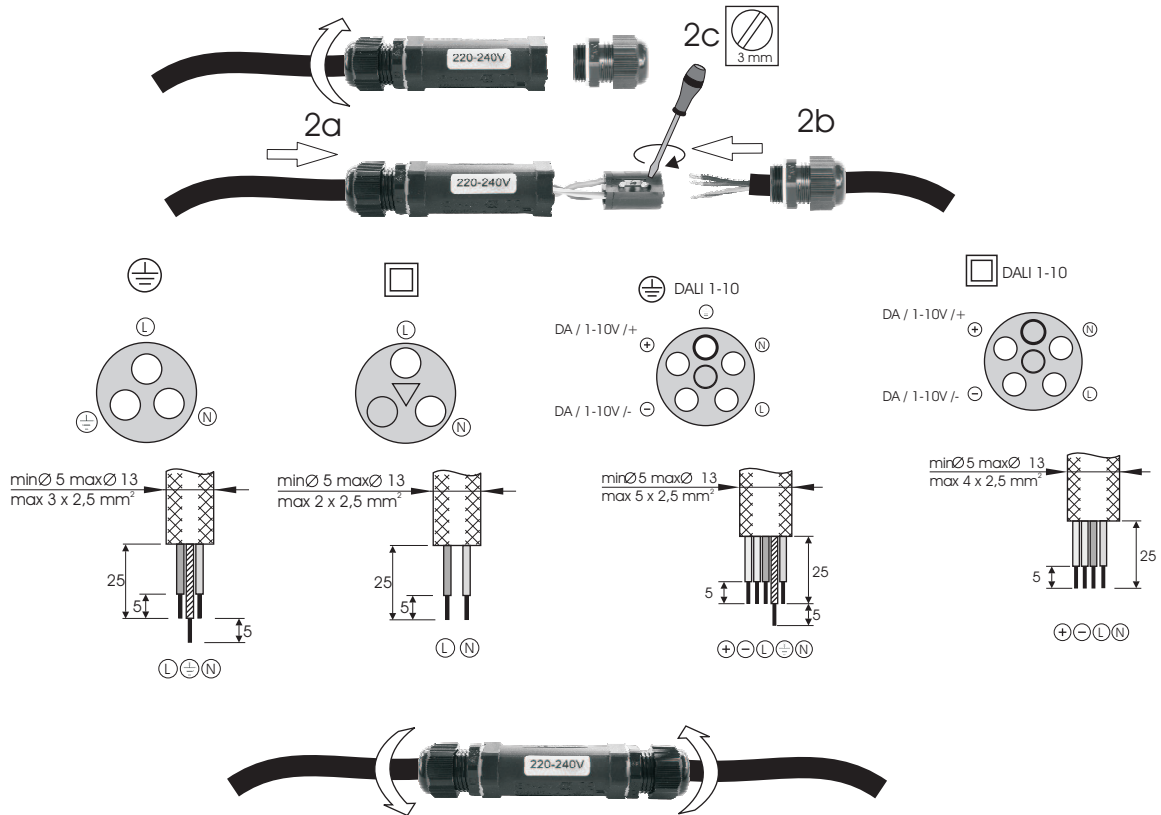

5

