

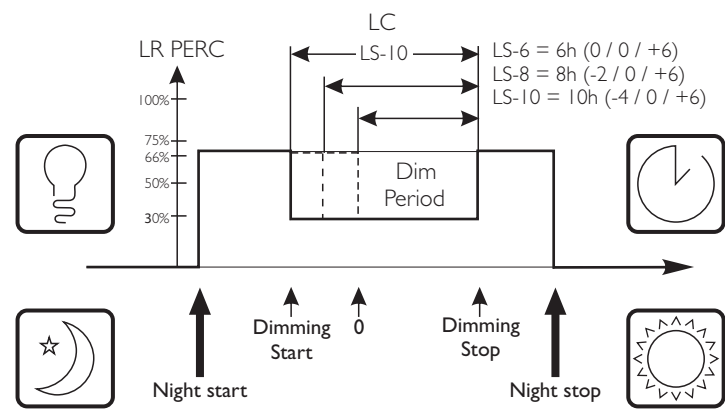



LUMISTEP

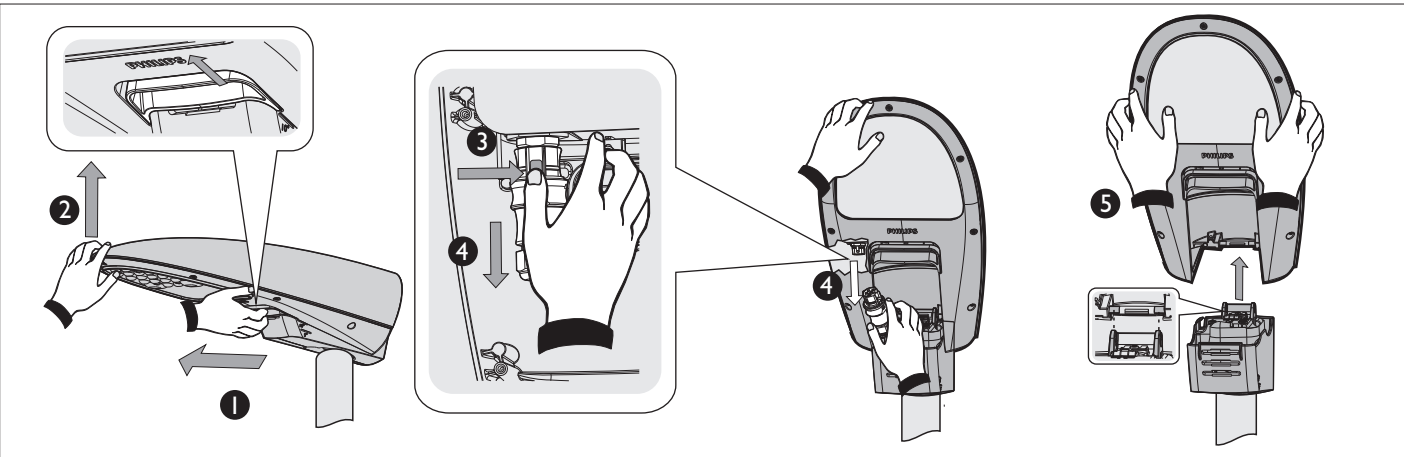

DYNADIMMER

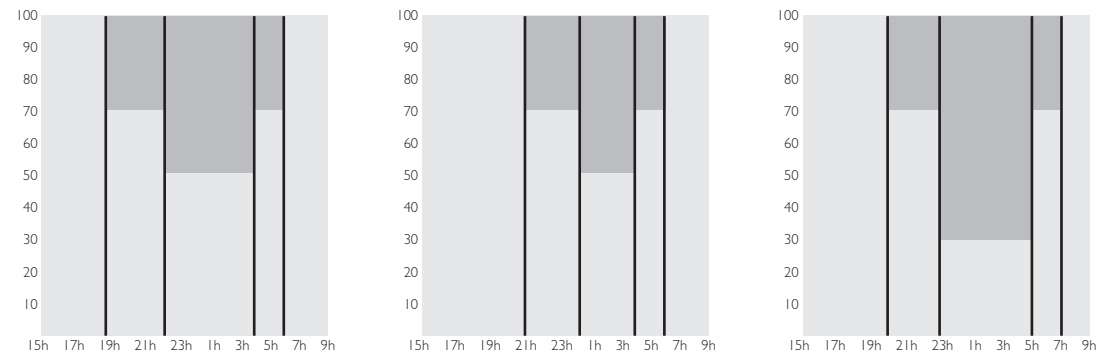

RF ANTENA / GPRS



Disconnect before servicing
Mettre hors tension avant intervention
Öffnen nur spannungsfrei

Demonteren voor onderhoud
Togliere tensione prima di fare manutenzione
Desconectar antes de manipular

Bryt strömmen före lampbyte

Philips Iridium gen3 Mini BGP 381

Mounting instructions

Instructions de montage
Montageanleitung
Montage instructie
Instruzioni di montaggio

Instrucciones de montaje
Instruções de montagem
Monteringsinstruktioner
Monteringsvejledning

Kokoonpano- ja kiinnitysohjeet
Montaj yönergesi
Οδηγίες συναμολογησης
Instrukcja montazu

Szerelési utasítások
Návod k montáži
Инструкция по монтажу
Návod k montáži

220 V
240 V

CE

IP66


EN 60598

IK09

Inrush current
65A / 100µs

	LINE	W					
LED	GRN1 1/830	10,1	●	●	10,1	-30°C	35°C
LED	GRN1 3/740	10,9	●	●	10,9	-30°C	35°C
LED	GRN1 3/830	11,9	●	●	11,9	-30°C	35°C
LED	GRN1 5/740	12,7	●	●	12,7	-30°C	35°C
LED	GRN1 5/830	13,7	●	●	13,7	-30°C	35°C
LED	GRN1 7/740	14,4	●	●	14,4	-30°C	35°C
LED	GRN1 7/830	15,6	●	●	15,6	-30°C	35°C
LED	GRN1 9/740	15	●	●	15	-30°C	35°C
LED	GRN1 9/830	16	●	●	16	-30°C	35°C
LED	GRN20/740	17,1	●	●	17,1	-30°C	35°C
LED	GRN20/830	18,7	●	●	18,7	-30°C	35°C
LED	GRN22/740	16,9	●	●	16,9	-30°C	35°C
LED	GRN22/830	18,6	●	●	18,6	-30°C	35°C
LED	GRN25/740	19,3	●	●	19,3	-30°C	35°C
LED	GRN25/830	21,2	●	●	21,2	-30°C	35°C
LED	GRN30/740	23,7	●	●	23,7	-30°C	35°C
LED	GRN30/830	25,6	●	●	25,6	-30°C	35°C
LED	GRN35/740	27,6	●	●	27,6	-30°C	35°C
LED	GRN35/830	30,6	●	●	30,6	-30°C	35°C
LED	GRN40/740	32,1	●	●	32,1	-30°C	35°C
LED	GRN40/830	35,1	●	●	35,1	-30°C	35°C
LED	GRN45/740	36,1	●	●	36,1	-30°C	35°C

Iridium LED BGP 381

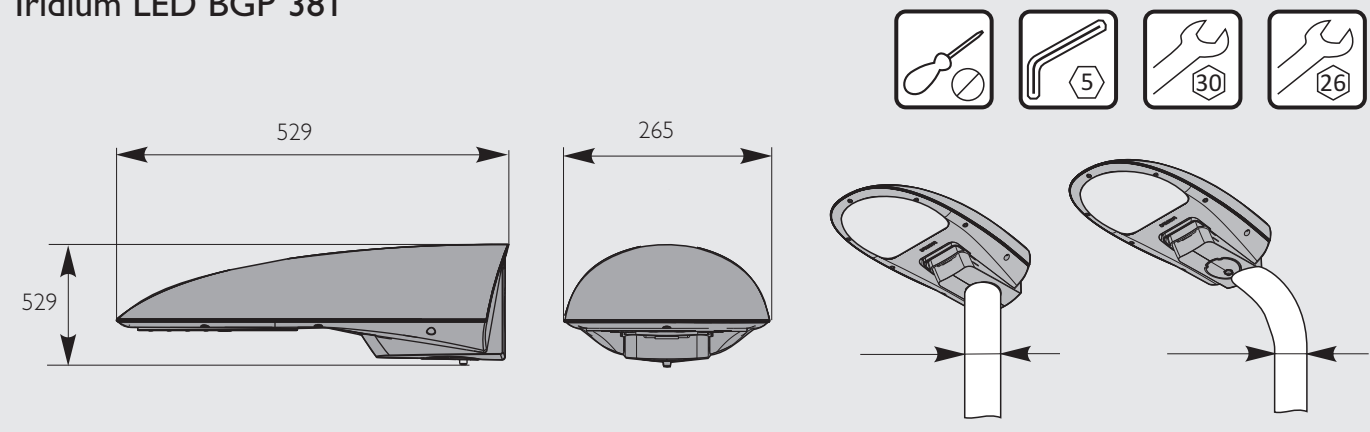

I2NC 4427 I01 38240
Versiondate: 01/01/2014
Data subject to change without notice
Printed in Poland
www.philips.com/lighting

PHILIPS

