



2345 G2 WD1 20/14/10/ML-8MC ET+HFS

TOC: 7790840

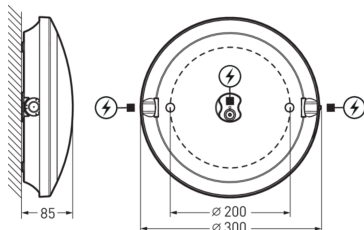

Product description

Luminaire type

Round LED surface-mounted weather-proof luminaire.

Light management

With integrated HF motion sensor. Shape of the detection area somewhat ellipsoid, Length of the detection area up to 12 m, Width of the detection area up to 8 m.

Applications

damp rooms, canopied outdoor areas not exposed to general weather.

Mounting methods

For wall or ceiling mounting.

Optical system

With opal polycarbonate diffuser, impact resistant. With Lambertian light intensity distribution.

LED system

Luminaire luminous flux adjustable in 3 levels. Luminaire luminous flux 760 lm - 2100 lm, connected load 11,00 W - 21,00 W, maximum luminous efficiency of luminaire 100 lm/W. Light colour warm white, correlated colour temperature (CCT) 3000 K, general colour rendering index (CRI) $R_a > 80$. Colour locus tolerance (initial MacAdam) ≤ 5 SDCM. Mean rated service life $L_{65}(t_q 25^\circ\text{C}) = 50,000$ h. The light source is replaceable according to the ecodesign requirements (VO (EU) 2019/2020).

Luminaire body

Luminaire body of plastic, white (RAL 9016). Diameter of diffuser $\varnothing 300$ mm, luminaire height 85 mm. Safety class (EN 61140): II, protection rating (DIN EN 60529): IP65, impact resistance level in accordance with IEC 62262: IK10, testing temperature of wire glow test in accordance with IEC 60695-2-11: 650°C . Weight: 0,8 kg.

Electrical version

With electronic transformer, switchable. The control gear unit is replaceable in accordance with the ecodesign requirements (VO (EU) 2019/2020). Control gear in multi-lumen version, luminous flux setting in factory default: 2000 lm. The luminaire complies with the fundamental requirements of applicable EU regulations and product safety legislation and bears the CE symbol. The luminaire is also ENEC-certified by an independent testing authority.

Product features and key data

Applications	Damp rooms canopied outdoor areas	
Luminaire type	Round LED surface-mounted weather-proof luminaire.	
Mounting method	Surface-mounting	
Luminaire optic	With opal polycarbonate diffuser, impact resistant.	
Light Engine	Level 1	Level 6
Colour temperature	3000 K	4000 K
Rated luminous flux	1000 lm	2000 lm
Connected load	10,00 W	20,00 W
Luminous efficacy	100 lm/W	100 lm/W
Service life	$L_{65}(25^\circ\text{C}) = 50.000$ h	
Colour rendering index	80	

Product features and key data

Colour tolerance	5 SDCM
Photobiological class	Group 0 - no risk
Luminaire colour	RAL9016 Traffic white
Luminaire body	Luminaire body of plastic, white
Wire diameter	1,50 mm ²
Connection method	Plug-in terminal
Mains frequency	50/60 Hz
Mains voltage	220 - 240 V
Total harmonic distortion < %	14 %
Ingress Protection (IP) rating	IP65
Protection class	II
Impact resistance (IK)	IK10
Hot wire resistance	650 °C
Ambient temperature	25 °C
Max. Luminaires B10	13
Max. Luminaires B16	21
Max. Luminaires C10	22
Max. Luminaires C16	36
Net height	85 mm
Outside diameter	300 mm
Weight	0,8 kg

For more sustainability in day-to-day business

New
packing



CO₂ OPTIMISED



NO PLASTIC



ONLY ONE MATERIAL



100% RECYCLABLE



www.trilux-twenty3.com/eco