

vizULO




MINI
MARTIN



RoHS





Architectural & Landscape

Sports Lighting

Large Outdoor Industrial Area

Agricultural Area

Ventilation cable gland

Combines pressure equalization and cable gland in a single unit. It ensures high air flow rates as well as high water protection capacity

Glass

Flat glass. Glass is fixed to die-cast aluminium frame with metal clips and can easily be replaced

LED module

High quality LED's with optimal thermal resistance and energy consumption characteristic, for high lumen output and long expected life time. Color temperature available: 3000K, 4000K

(5000K, 5700K available on customer request)

Intelligent light control system

Power line or radio frequency

Protection

IP66 for the complete luminaire

Module temperature control

The LED driver will start reducing the light output when the LED's approach critical temperature. The temperature is measured via a sensor placed on the PCB

(function available on customer request)

Body

Die-cast aluminium

Lighting protection

Built-in surge protection starting from 3 kV till 10 kV

Light regulation

MINI MARTIN drivers offer integrated midnight dimming and network-controlled 1-10V and DALI protocols

Impact resistance

IK08 (Vandal protected) for the complete luminaire



Traffic roads


Pedestrian Roads

Residential Street/Area

City Centre



Midnight dimming

Midnight dimming provides multi-stage night-time power reduction based on an internal timer referenced to the power on/off time. There is no need for an external control infrastructure. The unit automatically performs a dimming profile based on the predefined scheduled reference to the midpoint, which is calculated based on the power on / off times.

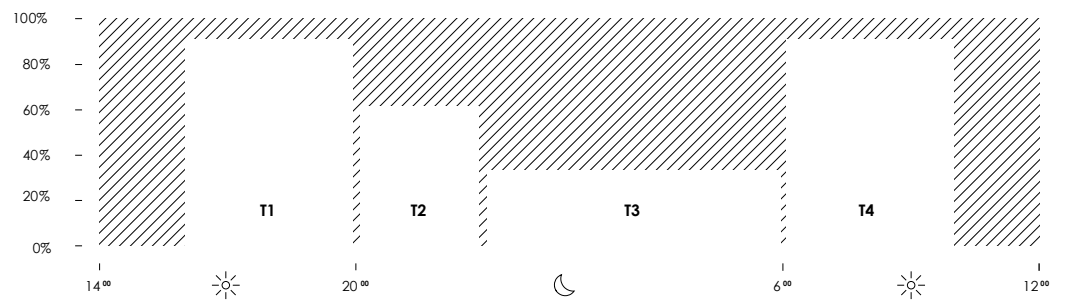

Mini martin with fins




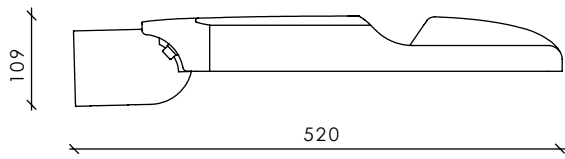


DB703




RAL9006


Other colors available on request

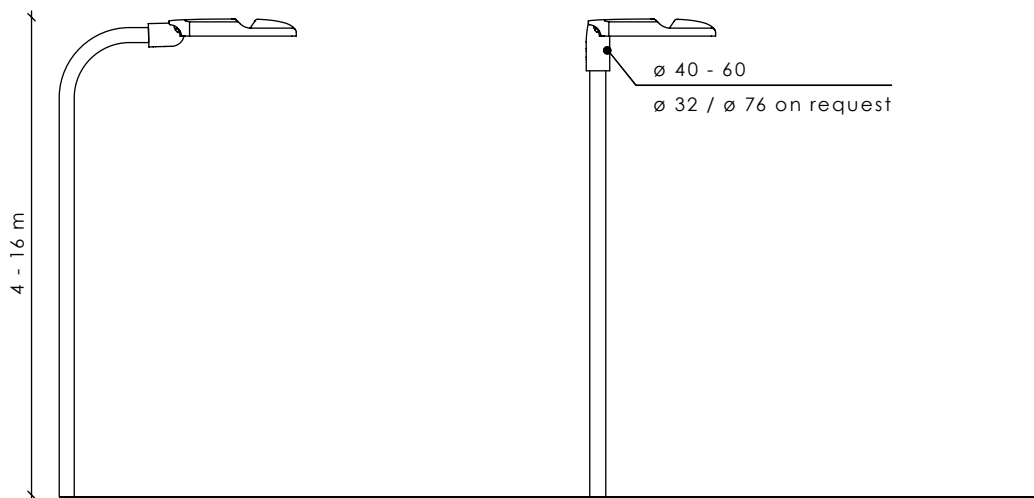


$\le 5 \dots -20$



$\le 0 \dots 20$




Horizontal entry



Vertical entry

Technical information



V	220 - 240	1-10V; DALI; Midnight dimming
Hz	50 - 60	Radio frequency ⁽³⁾
W	10 - 110	3; 6; 10 kV (optional) ⁽⁴⁾
lm	1100 - 13550	Warranty 5 years
lm/W	110 - 136	100 000h (L80B10C10) ⁽⁵⁾
K	3000 / 4000 ⁽¹⁾	100 000 h (L95B10C10) ⁽⁶⁾
°C	-40 to +50	
CRI	>70 / >80 ⁽²⁾	

<i>Body:</i>	Die-cast aluminum
<i>Spigot:</i>	ø 40-60, with accessories ø 32; ø 76
<i>Neto weight:</i>	5,5 - 6,5 kg
<i>Max.wind load</i>	
<i>area, SCd, m²:</i>	0,038

⁽¹⁾ 5000; 5700 K available on request

⁽²⁾ Luminaries with color rendering index (CRI): Ra >90 on request

⁽³⁾ Optional. Available only with DALI ; 1 - 10 V

⁽⁴⁾ 10 kV (L-N; L/N-PE) surge protection device available on request

⁽⁵⁾ Average lifetime value for ECO model at Ta = 25C is 100 000h L80/B10*


*This value is only informative and may change according to selected article. LED Lifetime is strongly depending from LEDs current and junction temperature – increase in LED current and luminaire power lead to increase of junction temperature and as consequence lifetime decrease. Thus, luminaire models with lower power, lower current (and lower junction temperature) will have higher lifetime than standard models and will reach 100 000h L90/B10. And high power and high current luminaire models may have negative lifetime deviation comparing to standard models. To receive precise value please contact VIZULO export representatives.

⁽⁶⁾ Standard / High Density at Ta=25°C, this value is only informative and may change according to selected article

⁽⁷⁾ IK09 - screw version with tempered unprinted glass

⁽⁸⁾ Coming soon

Model name principles

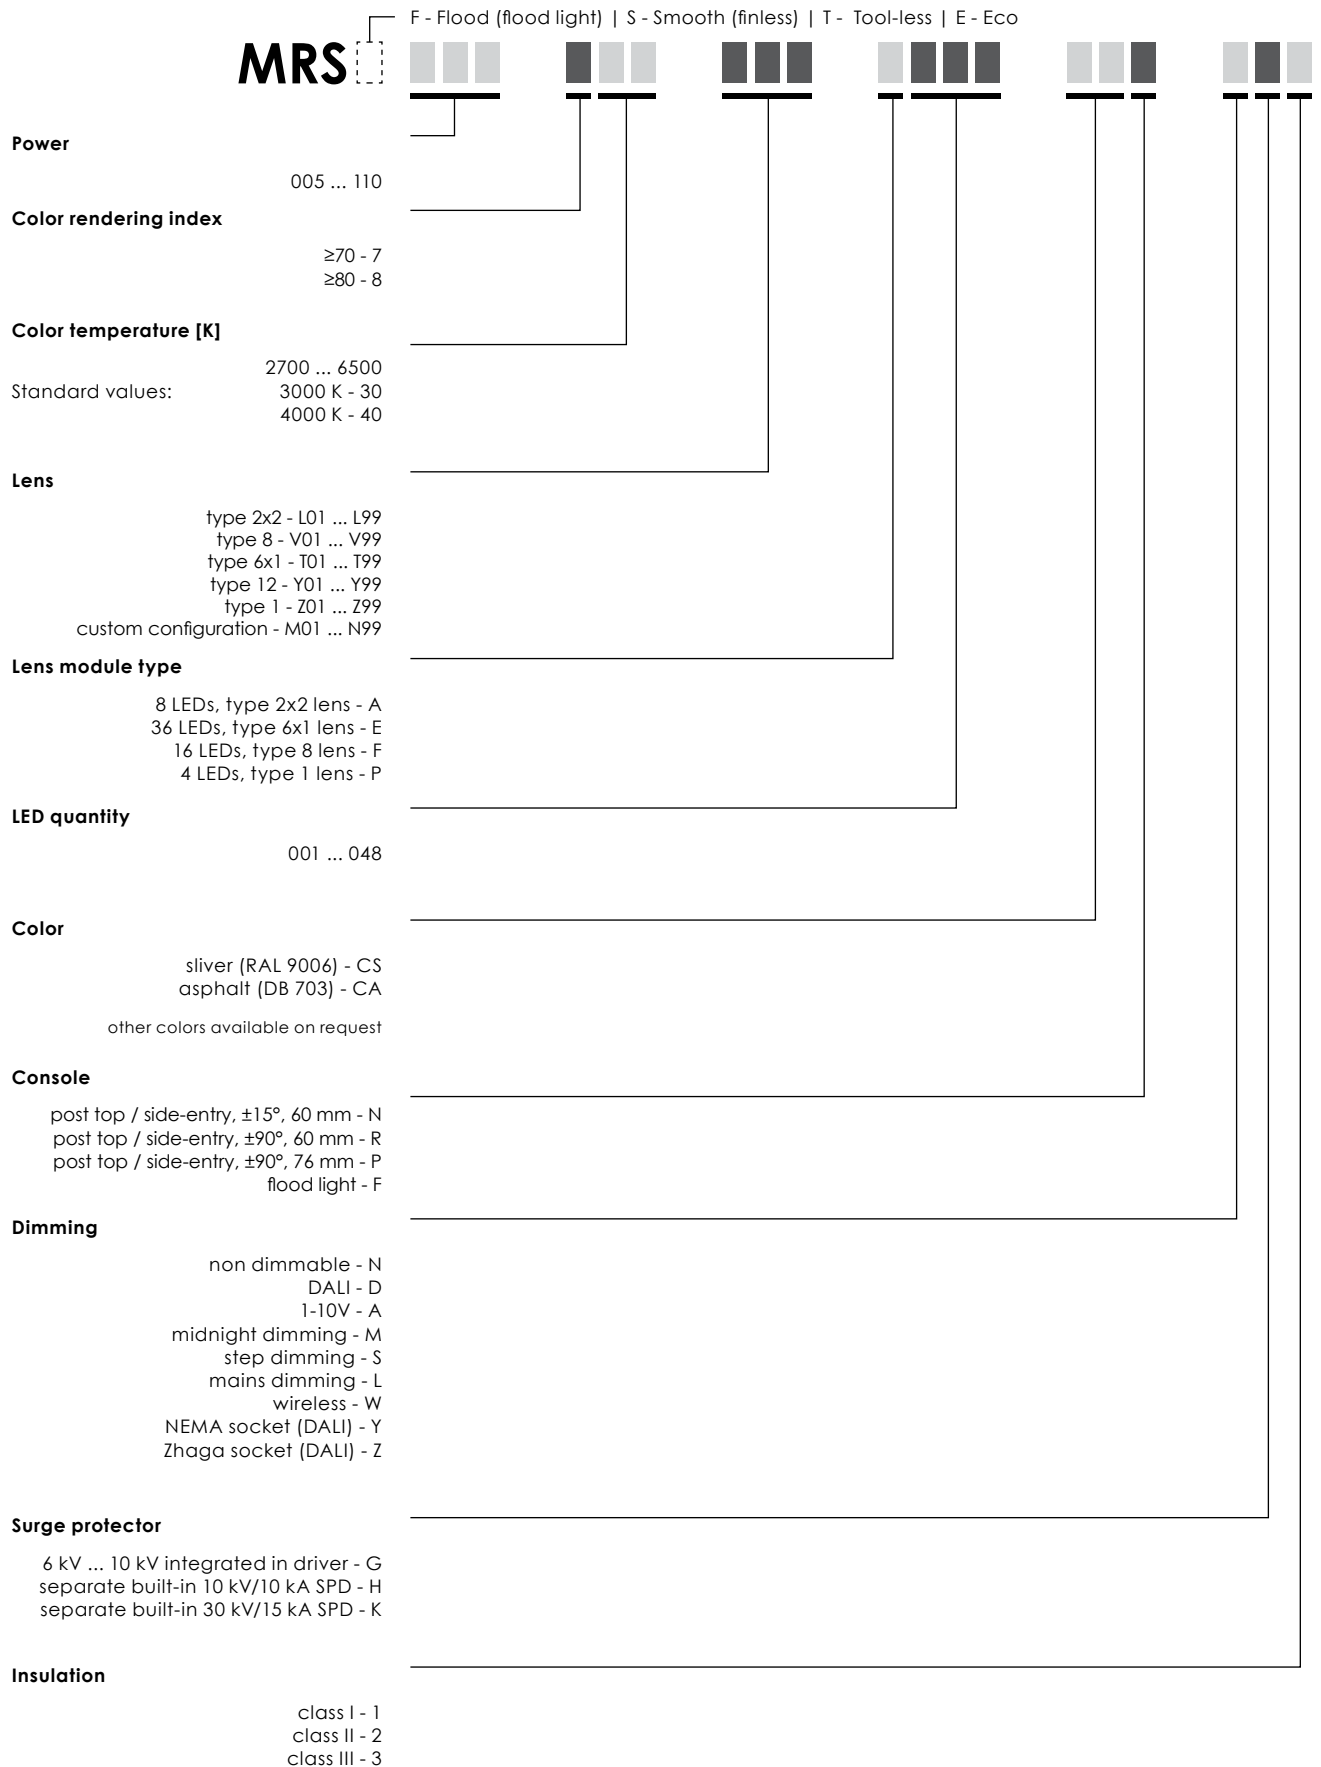

Standard modules

*Only with optic 01 / 02 / 03

4000K

Number of LED's	8			16			24			36*		
Nominal current, mA	350	520	700	350	500	700	350	500	700	350	500	710
Power, W	10	15	19	20	26	35	29	39	52	40	55	78
Luminous Flux, lm	1220	1820	2260	2550	3310	4350	3810	5060	6580	5470	7390	9930
Efficacy, lm/W	122	121	119	128	127	124	131	130	127	137	134	127
Power factor, PF	0,84	0,92	0,96	0,91	0,95	0,97	0,93	0,95	0,97	0,95	0,98	0,98

Luminaire efficacy	3000 K	10 - 78 W	1060 - 9610 lm	102 - 124 lm/W
	4000 K	10 - 78 W	1220 - 9930 lm	119 - 137 lm/W
	5000 K	10 - 78 W	1220 - 9930 lm	119 - 137 lm/W

High density modules

Only with optic 01 / 04 / 05 / 20 / 22 / 35

4000K

Number of LED's	16			32			48			
Nominal current, mA	350	500	700	370	500	700	350	500	700	760
Power, W	20	26	35	37	50	68	51	72	102	110
Luminous Flux, lm	2550	3310	4350	5010	6650	8690	7120	9710	13190	13550
Efficacy, lm/W	128	127	124	135	133	128	140	135	129	123
Power factor, PF	0,91	0,95	0,97	0,95	0,97	0,98	0,95	0,97	0,98	0,97

Luminaire efficacy	3000 K	20 - 110 W	2470 - 13620 lm	114 - 131 lm/W
	4000 K	20 - 110 W	2550 - 13550 lm	124 - 140 lm/W
	5000 K	20 - 110 W	2550 - 14070 lm	134 - 140 lm/W

4000K


	8			16			24		
Number of LED's									
Nominal current, mA	350	500	700	350	500	700	350	500	700
Power, W	19	26	38	37	52	75	54	76	110
Luminous Flux, lm	2580	3390	4460	5120	6770	8920	7680	10070	13270
Efficacy, lm/W	136	130	117	138	130	119	142	133	121
Power factor, PF	0,85	0,9	0,91	0,94	0,97	0,98	0,97	0,98	0,99

Logistic information

Carton size/cm L*W*H	Quantity per carton/pcs	Pallet quantity in 20' sea container	Pallet quantity in 40' sea container	QTY per pallet/pcs	Full palette size/cm L*W*H	Number of luminaires per row	Number of rows
54,5 x 23,5 x 16,5	1	20	25	70	120 x 80 x 177	7	10

	NETO WEIGHT/KG		BRUTO WEIGHT/KG	
	Per 1 pcs	Per pallet	Per 1 pcs	Per pallet
MINI MARTIN 1 module luminaires	5,5	385	6,1	427
MINI MARTIN 2 module luminaires	5,55	388,5	6,15	430,5
MINI MARTIN 3 module luminaires	5,6	392	6,2	434
MINI MARTIN 4 module luminaires	5,65	395,5	6,25	437,5

Pole height proposition

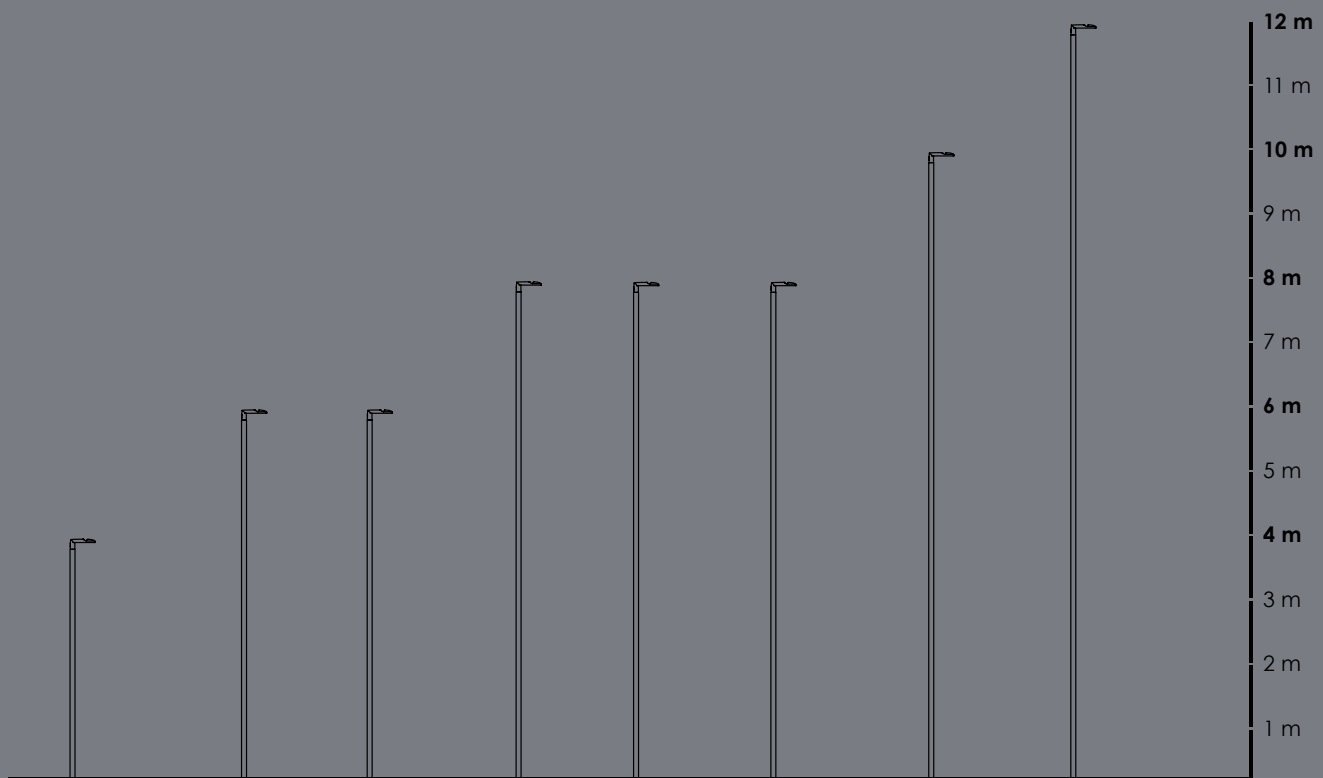

Pole height	4m	6 - 8 m	8 m	8 - 10 m	10 m	14 - 16 m
Standard modules	18 W	37 W	52 W			
High-power modules				78 W		
High-density modules		37 W		68 W	102 W	110 W



Reykjavik | Iceland




Hestheimar horse farm | Iceland

Accessories

Citintelly Segment controller

Art. 70010004

Segment Controller receives commands from Citintelly server via GSM and transmits tasks to Luminaire Controller via radio frequency communication.




Citintelly Luminaire controller

Luminaire Controller is wireless mesh-networking device that uses 868 MHz for communication with Segment Controller and other Luminaire Controllers. It is delivered in various configurations to meet the needs of your applications.

Art. 70010001 /
LC2M-23-05-R Luminaire
Controller - 2 relays

Art. 70010002 /
LC2M-12-05-R Luminaire
Controller - 1 relay



Citintelly Surge Protection device

Art. 70020001

Surge Protection device offers protection against lighting surges;


Voltage Protection level up (L-N) $\leq 1,5$ kV

Voltage Protection level up (L/N-PE) $\leq 2,0$ kV

$U_{oc} = 10$ kV

$I_{max} = 10$ kA

$I_{nom} = 5$ kA



Radio Frequency Antenna

Art. 70000108

Heavy duty IP67 enclosure
Mounted in cabinet or luminaire body
with 14 mm screw
SMA connector




NEMA Socket

2213362-3, 5 pin NEMA socket 105°C wires

Art. 70000362


2213362-4, 7 pin NEMA socket 105°C wires

Art. 70000333




Dummy Link for NEMA Socket

Art. 70000113



MSLC205RGL Luminaire controller, Zhaga, 80mm

Art. 70010029




Zhaga socket no cap

Art. 70000612



Zhaga socket with cap


Art. 70000613



Console adapter

Spigot size 60 - 76mm


Art. 70044002



Wall mounting bracket

Spigot size 40 - 60 mm


Art. 70044001



Wall mounting bracket

Vertical


Art. 70044004



Connector

IP66 rated connector offers easy installation of the street luminaires.
3 wire cable connector


Art. 70000313



Connector


IP66 rated connector offers easy installation of the street luminaires.
5 wire cable connector

Art. 70000304




Adjustable Console ±90°
60 mm - Mini Martin / Micro Martin

Art. 70055005



Adjustable Console ±90°
76 mm - Mini Martin / Micro Martin


Art. 70055006

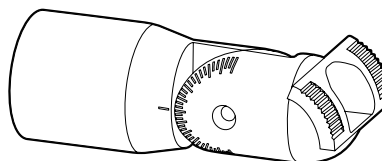

Pre-installed cable sets

For internal power supply:


3 x 1,5 mm - 0,5 m long cable.....	Art. 70000319
3 x 1,5 mm - 5 m long cable.....	Art. 70000320
3 x 1,5 mm - 6 m long cable.....	Art. 70000321
3 x 1,5 mm - 8 m long cable.....	Art. 70000322
3 x 1,5 mm - 10 m long cable.....	Art. 70000323
3 x 1,5 mm - 12 m long cable.....	Art. 70000324
3 x 1,5 mm - 18 m long cable.....	Art. 70000325
3 x 1,5 mm - 20 m long cable.....	Art. 70000425
3 x 1,5 mm - 22 m long cable.....	Art. 70000426
3 x 1,5 mm - 25 m long cable.....	Art. 70000427
3 x 1,5 mm - 32 m long cable.....	Art. 70000430
3 x 1,5 mm - 42 m long cable.....	Art. 70000431
3 x 1,5 mm - 50 m long cable.....	Art. 70000432



Pre-installed cable sets

For internal power supply:

5 x 1,5 mm - 0,5 m long cable.....	Art. 70000305
5 x 1,5 mm - 5 m long cable.....	Art. 70000316
5 x 1,5 mm - 6 m long cable.....	Art. 70000317
5 x 1,5 mm - 8 m long cable.....	Art. 70000318
5 x 1,5 mm - 10 m long cable.....	Art. 70000306
5 x 1,5 mm - 12 m long cable.....	Art. 70000307
5 x 1,5 mm - 18 m long cable.....	Art. 70000308
5 x 1,5 mm - 20 m long cable.....	Art. 70000428
5 x 1,5 mm - 22 m long cable.....	Art. 70000429
5 x 1,5 mm - 25 m long cable.....	Art. 70000429
5 x 1,5 mm - 32 m long cable.....	Art. 70000433
5 x 1,5 mm - 42 m long cable.....	Art. 70000434
5 x 1,5 mm - 50 m long cable.....	Art. 70000435



VIZULO

Starta street 1
Riga, LV – 1026, Latvia

Sales: + 371 67 383 023
Production: + 371 67 383 024

office@vizulo.com
www.vizulo.com



VIZULO



VIZULO_PHOTO

