

Helena Bollard – decorative fitting in a Nordic design

Description

Decorative park fitting for installation on a short pole. Helena bollard is a top fitting and requires an additional pole and mounting kit. The fitting is delivered in grey, RAL 7035 as standard. Housing and base is made of die-cast aluminium top cover in hot galvanized steel, rods of aluminium diffuser in clear or opal PMMA acrylic. The reflector shield is made of aluminium, painted in white.

Application areas

Footpaths, entrances, parks, parking area etc...

Mounting


Foundation for base mounting or root mounting.

Installation

Supplied with 1m 3x1,5mm² cable. Fuse block can be mounted through a hatchway on the pole.

Others

Also available as Park fitting.

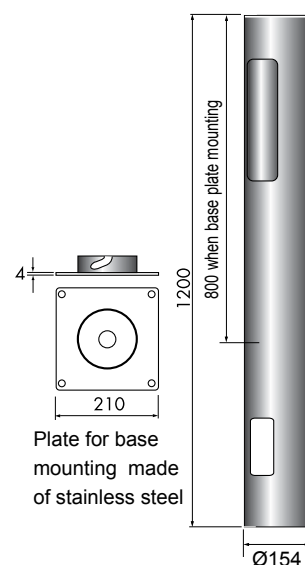

LED module

	Clear	Clear	Opal	Opal
Effect from fitting:	45W	45W	45W	45W
Colour temperature:	3000K	4000K	3000K	4000K
Luminous flux LED module:	3900 lm	4300 lm	3900 lm	4300 lm
Luminous flux fitting:	1943 lm	2144 lm	2586 lm	2854 lm
Luminous efficiency fitting:	43 lm/W	47,5 lm/W	57,5 lm/W	63,5 lm/W
Colour index Ra:	85			
Colour tolerance MacAdam:	3 SDCM			
Expected life time L70:	90 000 h			
Ambient temperatur Ta:	25°C			

Number	Type	Diffuser	Colour	Light source	Weight (kg)
116050	Helena Bollard	Clear	Grey	LED 840 40W	6,2
116051	Helena Bollard	Opal	Grey	LED 840 40W	6,2
116052	Helena Bollard	Clear	Grey	LED 830 40W	6,2
116053	Helena Bollard	Opal	Grey	LED 830 40W	6,2
103549	Pole	H=800	Grey		
101240	Pole	H=1200	Grey		
101256	Pole	Base mounting plate	Stainless steel		
102800	Pole	Adapter 108-fundament	Stainless steel		

Reservation for misprinting or product changes