



INSTALLATION AND SERVICE MANUAL



For installation of Robust 1,2,3 Recessed exterior downlight round dia 240mm. and square 240mm.
Model. RO-80030-33, RO-80036-35W, RO-80060-63, RO-80069-35W, RO-80161-64 and RO-80170-35W.

Product drawing (dimensions)

CE IP65 IK10 0.5m

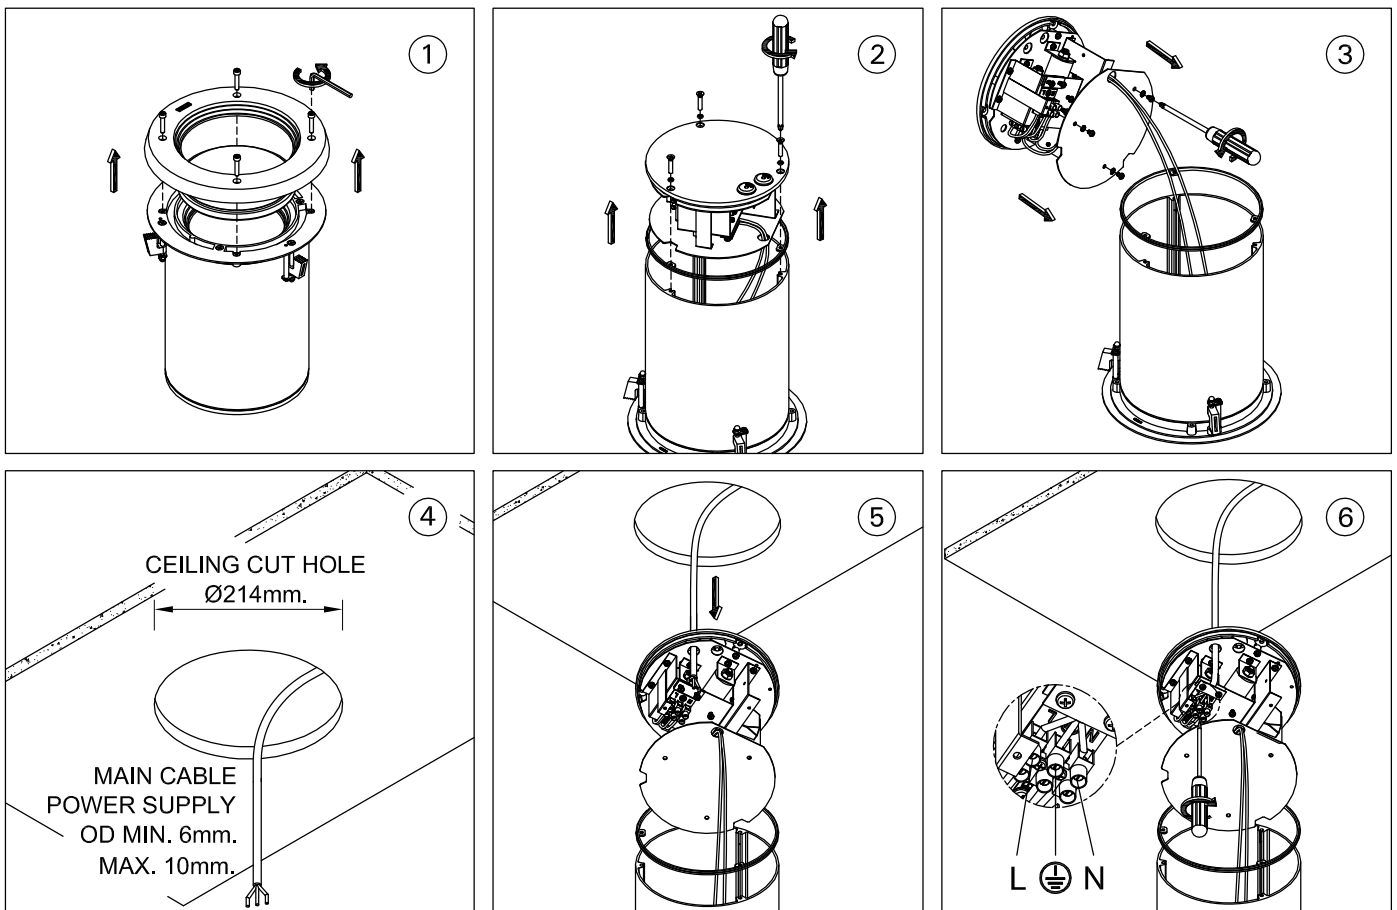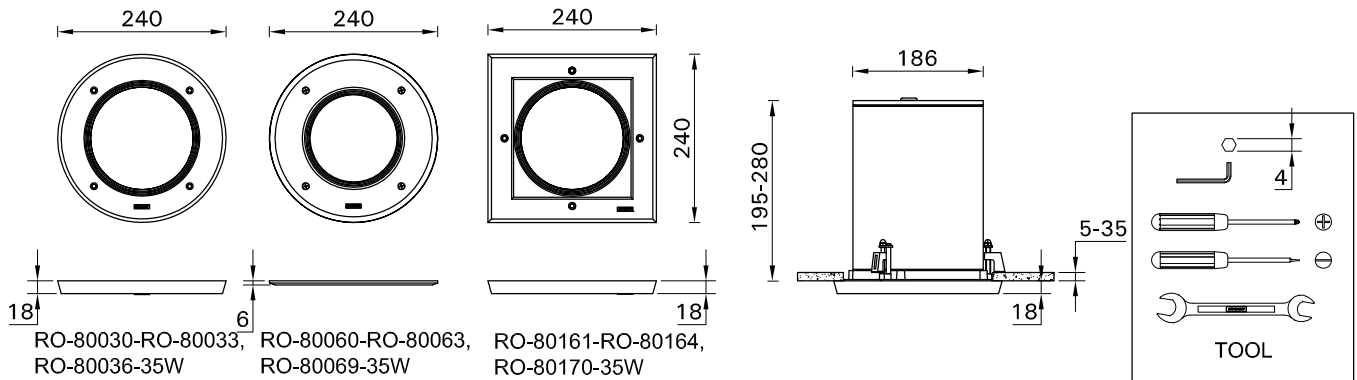

- LIGMAN standard products are supplied with the control gear 220/230v 50Hz.
The control gear for other voltages and frequencies is available upon request, please consult us for more details.
 - LIGMAN luminaires are designed to conform IEC 60598 2-1 standard.
- Technical amendments and modifications techniques reserved.

Ligman Lighting Company Limited

Head office and factory
17/2 Moo 4, Monthong, Bangnampreaw, Chachoengsao 24150 Thailand
Business Contact Address
Branch : Marketing department / Showroom & Customer service
2912 Ladprao Rd., Klonjun, Bangkok, Bangkok 10240 Thailand
Tel : +66 (2) 7339140 Fax : +66 (2) 7339154

www.ligmanlighting.com

M RO-80030/24/0713/REV.10
1/2



FM-TS-13/25-05-2007-REV.2

