

OUTDOOR LIGHTING



Prices excl VAT - Valid from 01.07.2019

PERFORMANCE
iN LIGHTING

CEILING MOUNTED

QUASAR



QUASAR 10
CEILING
p. 25



QUASAR 30
CEILING
p. 25



MIMIK 10
CEILING
p. 24

WALL MOUNTED

LANTERNA NK 21/27



LANTERNA NK 21
p. 9



LANTERNA NK 27
p. 9

QUASAR



QUASAR 10
p. 11



QUASAR 20
p. 12



QUASAR 30
p. 13



QUASAR 60
p. 14

MASK+



MASK+ MINI
p. 10



MASK+
p. 10

POLO+




POLO+ ZERO
p. 16



POLO+ 1
p. 16



POLO+ 2
p. 16



POLO+ 3
p. 17

MIMIK



MIMIK 10
p. 18



MIMIK 10
FLAT
p. 19



MIMIK 20
p. 20



MIMIK 20
FLAT
p. 21



MIMIK 30
p. 22



MIMIK 30
FLAT
p. 23

FLOODLIGHT

FOCUS+



FOCUS+ ZERO KIT
p. 4



FOCUS+ ZERO
p. 4



FOCUS+ 1
p. 5



FOCUS+ 2
p. 6



FOCUS+ 3
p. 8

RECESSED WALL

INSERT+



INSERT+ ZERO
p. 26



INSERT+ ZERO CLIP
p. 26



INSERT+ 1
p. 27



INSERT+ 1 MARINE
p. 27



INSERT+ 2
p. 28



INSERT+ 3
p. 30

BOLLARD

MIMIK



MIMIK 10 POST 300
p. 33



MIMIK 10 POST 600
p. 32



MIMIK 10 POST 1000
p. 32

PADO



PADO 600
p. 34



PADO 900
p. 34



PADO 1200
p. 34



PADO BASIC
p. 35

STILO+ BASIC



STILO+ BASIC MINI
p. 31



STILO+ BASIC MIDI
p. 31

FOCUS+ ZERO



3m
cable





- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

FOCUS+ ZERO KIT S/EW

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	●	305509
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	●	305508



FOCUS+ ZERO S/EW



IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	●	304609
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	●	304608
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	●	304611
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	●	304610
10 W	4000	S/EW	1485 lm	634 lm	70	10	35000 h	○	304690
10 W	3000	S/EW	1350 lm	611 lm	70	10	35000 h	○	304689




ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Connection Kit Ø 7-10,5 mm IP 68	-	310513
Connection Kit Y 3-way Ø 14-17 mm IP 68	-	310495
Connection Kit Y 3-way Ø 7-1,5 mm IP 68	-	310496
Ground spike	●	700191

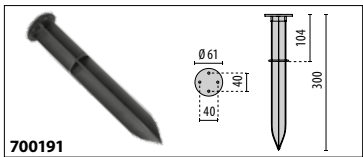

Pre-wired with 1m H05RN-F cable.

FOCUS+ 1




● AN-96 / Anthracite gray / Textured

FOCUS+1 A/M

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	A/M	1880 lm	1308 lm	70	10	60000 h	● 305098	
18 W	3000	A/M	1680 lm	1170 lm	70	10	60000 h	● 305097	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	A/M	1880 lm	1308 lm	70	10	60000 h	● 305110	
18 W	3000	A/M	1680 lm	1170 lm	70	10	60000 h	● 305109	



FOCUS+1 A/W

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	A/W	1880 lm	1239 lm	70	10	60000 h	● 305100	
18 W	3000	A/W	1680 lm	1108 lm	70	10	60000 h	● 305099	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	A/W	1880 lm	1239 lm	70	10	60000 h	● 305112	
18 W	3000	A/W	1680 lm	1108 lm	70	10	60000 h	● 305111	



FOCUS+1 C/I

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	C/I	1880 lm	1395 lm	70	10	60000 h	● 305486	
18 W	3000	C/I	1680 lm	1247 lm	70	10	60000 h	● 305485	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	C/I	1880 lm	1395 lm	70	10	60000 h	● 305102	
18 W	3000	C/I	1680 lm	1247 lm	70	10	60000 h	● 305101	



FOCUS+1 C/M

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	C/M	1880 lm	1389 lm	70	10	60000 h	● 305488	
18 W	3000	C/M	1680 lm	1242 lm	70	10	60000 h	● 305487	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	C/M	1880 lm	1389 lm	70	10	60000 h	● 305104	
18 W	3000	C/M	1680 lm	1242 lm	70	10	60000 h	● 305103	



FOCUS+1 C/W

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	C/IW	1880 lm	1320 lm	70	10	60000 h	● 305490	
18 W	3000	C/IW	1680 lm	1180 lm	70	10	60000 h	● 305489	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	C/IW	1880 lm	1320 lm	70	10	60000 h	● 305106	
18 W	3000	C/IW	1680 lm	1180 lm	70	10	60000 h	● 305105	



FOCUS+1 ELL


IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
18 W	4000	ELL	1880 lm	1462 lm	70	10	60000 h	● 305096	
18 W	3000	ELL	1680 lm	1307 lm	70	10	60000 h	● 305095	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
18 W	4000	ELL	1880 lm	1462 lm	70	10	60000 h	● 305108	
18 W	3000	ELL	1680 lm	1307 lm	70	10	60000 h	● 305107	





ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Ground spike	●	700191



FOCUS+ 2

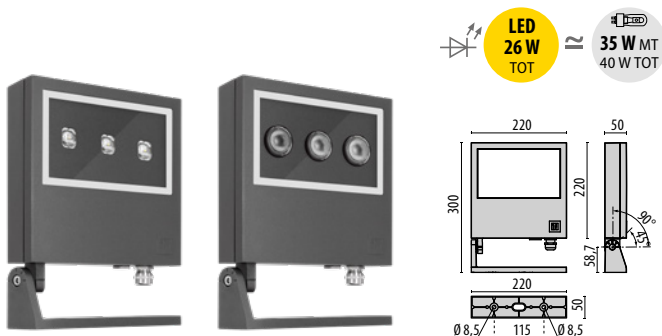


● AN-96 / Anthracite gray / Textured

FOCUS+2 A/M

IK09 10J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	A/M	2820 lm	2069 lm	70	10	60000 h	● 305170	
26 W	3000	A/M	2520 lm	1853 lm	70	10	60000 h	● 305169	
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	A/M	2820 lm	2069 lm	70	10	60000 h	● 305182	
26 W	3000	A/M	2520 lm	1853 lm	70	10	60000 h	● 305181	



FOCUS+2 A/W

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	A/W	2820 lm	2074 lm	70	10	60000 h	●	305172
26 W	3000	A/W	2520 lm	1857 lm	70	10	60000 h	●	305171
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	A/W	2820 lm	2074 lm	70	10	60000 h	●	305184
26 W	3000	A/W	2520 lm	1857 lm	70	10	60000 h	●	305183



FOCUS+2 C/I

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	C/I	2820 lm	2189 lm	70	10	60000 h	●	305162
26 W	3000	C/I	2520 lm	1960 lm	70	10	60000 h	●	305161
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	C/I	2820 lm	2189 lm	70	10	60000 h	●	305174
26 W	3000	C/I	2520 lm	1960 lm	70	10	60000 h	●	305173



FOCUS+2 C/M

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	C/M	2820 lm	2181 lm	70	10	60000 h	●	305164
26 W	3000	C/M	2520 lm	1953 lm	70	10	60000 h	●	305163
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	C/M	2820 lm	2181 lm	70	10	60000 h	●	305176
26 W	3000	C/M	2520 lm	1953 lm	70	10	60000 h	●	305175



FOCUS+2 C/W

IK09 10J xx7

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	C/W	2820 lm	2037 lm	70	10	60000 h	●	305166
26 W	3000	C/W	2520 lm	1824 lm	70	10	60000 h	●	305165
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	C/W	2820 lm	2037 lm	70	10	60000 h	●	305178
26 W	3000	C/W	2520 lm	1824 lm	70	10	60000 h	●	305177



FOCUS+2 ELL

IK09 10J xx7

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	ELL	2820 lm	2292 lm	70	10	60000 h	●	305168
26 W	3000	ELL	2520 lm	2052 lm	70	10	60000 h	●	305167
Power LED - dimmable DALI 220-240 V 50/60 Hz									
26 W	4000	ELL	2820 lm	2292 lm	70	10	60000 h	●	305180
26 W	3000	ELL	2520 lm	2052 lm	70	10	60000 h	●	305179



FOCUS+ 3






LED
50 W
TOT



70 W MT
80 W TOT










● AN-96 / Anthracite gray / Textured

FOCUS+3 A/M

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50 W	4000	A/M	5640 lm	3807 lm	70	10	60000 h	●	305242
50 W	3000	A/M	5040 lm	3409 lm	70	10	60000 h	●	305241
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50 W	4000	A/M	5640 lm	3807 lm	70	10	60000 h	●	305254
50 W	3000	A/M	5040 lm	3409 lm	70	10	60000 h	●	305253



FOCUS+3 A/W

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50 W	4000	A/W	5640 lm	3820 lm	70	10	60000 h	●	305244
50 W	3000	A/W	5040 lm	3420 lm	70	10	60000 h	●	305243
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50 W	4000	A/W	5640 lm	3820 lm	70	10	60000 h	●	305256
50 W	3000	A/W	5040 lm	3420 lm	70	10	60000 h	●	305255



FOCUS+3 C/I

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50W	4000	C/I	5640 lm	4199 lm	70	10	60000 h	●	305234
50W	3000	C/I	5040 lm	3760 lm	70	10	60000 h	●	305233
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50W	4000	C/I	5640 lm	4199 lm	70	10	60000 h	●	305246
50W	3000	C/I	5040 lm	3760 lm	70	10	60000 h	●	305245



FOCUS+3 C/M

IK09 10J xx7


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50W	4000	C/M	5640 lm	4114 lm	70	10	60000 h	●	305236
50W	3000	C/M	5040 lm	3683 lm	70	10	60000 h	●	305235
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50W	4000	C/M	5640 lm	4114 lm	70	10	60000 h	●	305248
50W	3000	C/M	5040 lm	3683 lm	70	10	60000 h	●	305247



FOCUS+3 C/W

IK09 10J xx7

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50 W	4000	C/W	5640 lm	3852 lm	70	10	60000 h	●	305238
50 W	3000	C/W	5040 lm	3449 lm	70	10	60000 h	●	305237
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50 W	4000	C/W	5640 lm	3852 lm	70	10	60000 h	●	305250
50 W	3000	C/W	5040 lm	3449 lm	70	10	60000 h	●	305249




FOCUS+3 ELL

IK09 10J xx7

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
50 W	4000	ELL	5640 lm	4428 lm	70	10	60000 h	●	305240
50 W	3000	ELL	5040 lm	3964 lm	70	10	60000 h	●	305239
Power LED - dimmable DALI 220-240 V 50/60 Hz									
50 W	4000	ELL	5640 lm	4428 lm	70	10	60000 h	●	305252
50 W	3000	ELL	5040 lm	3964 lm	70	10	60000 h	●	305251



LANTERNA NK 21/27




- AN-96 / Anthracite gray / Textured
- RB-10 / Rust / Textured

LANTERNA NK 21

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
12 W	4000	S/EW	738 lm	480 lm	80	10	50000 h	●	3102570
12 W	3000	S/EW	672 lm	479 lm	80	10	50000 h	●	3102569
12 W	4000	S/EW	738 lm	480 lm	80	10	50000 h	●	3102572
12 W	3000	S/EW	672 lm	479 lm	80	10	50000 h	●	3102571




LANTERNA NK 27

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
14,5 W	4000	S/EW	1002 lm	592 lm	80	10	50000 h	●	3102566
14,5 W	3000	S/EW	912 lm	546 lm	80	10	50000 h	●	3102564
14,5 W	4000	S/EW	1002 lm	592 lm	80	10	50000 h	●	3102568
14,5 W	3000	S/EW	912 lm	546 lm	80	10	50000 h	●	3102567
1x100 W	-	-	-	-	-	-	-	●	3102163
1x100 W	-	-	-	-	-	-	-	●	3102164





IK05 0.70J xx3



MASK+ MINI M

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
8 W	4000	S/EW	733 lm	200 lm	-	10	54000 h	●	3102527
8 W	3000	S/EW	733 lm	200 lm	-	10	54000 h	●	3101602
8 W	4000	S/EW	733 lm	200 lm	-	10	54000 h	○	3102528
8 W	3000	S/EW	733 lm	200 lm	-	10	54000 h	○	3101603

MASK+ MINI B

IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
16 W	4000	S/EW	1450 lm	390 lm	-	10	54000 h	●	3102529
16 W	3000	S/EW	1450 lm	390 lm	-	10	54000 h	●	3101604
16 W	4000	S/EW	1450 lm	390 lm	-	10	54000 h	○	3102530
16 W	3000	S/EW	1450 lm	390 lm	-	10	54000 h	○	3101605



MASK+ M

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
12,5 W	4000	S/EW	1668 lm	971 lm	70	10	50000 h	●	3100765
12,5 W	3000	S/EW	1552 lm	914 lm	70	10	50000 h	●	3100763
12,5 W	4000	S/EW	1668 lm	971 lm	70	10	50000 h	○	3100766
12,5 W	3000	S/EW	1552 lm	914 lm	70	10	50000 h	○	3100764

Power LED - Emergency 1h 220/240 V 50/60 Hz

125W+2W	4000	S/EW	1552 lm	971 lm	70	10	50000 h	●	3101062
125W+2W	3000	S/EW	1552 lm	914 lm	70	10	50000 h	●	3101060
125W+2W	4000	S/EW	1552 lm	971 lm	70	10	50000 h	○	3101063
125W+2W	3000	S/EW	1552 lm	914 lm	70	10	50000 h	○	3101061

MASK+ B

IK06 1J xx3





WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
24 W	4000	S/EW	3336 lm	1879 lm	70	10	50000 h	●	3100769
24 W	3000	S/EW	3104 lm	1770 lm	70	10	50000 h	●	3100767
24 W	4000	S/EW	3336 lm	1879 lm	70	10	50000 h	○	3100770
24 W	3000	S/EW	3104 lm	1770 lm	70	10	50000 h	○	3100768



● AN-96 / Anthracite gray / Textured


○ WH-87 / White / Textured

Consult factory for DALI versions



QUASAR 10

design by R. Fiorato - F. Pagliarini




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

QUASAR 10 1WB

IK02 0.20J xx0


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
3,5 W	4000	R	230 lm	122 lm	80	10	50000 h	●	303355
3,5 W	3000	R	150 lm	100 lm	80	10	50000 h	●	303354
3,5 W	4000	R	230 lm	122 lm	80	10	50000 h	●	303357
3,5 W	3000	R	150 lm	100 lm	80	10	50000 h	●	303356
3,5 W	4000	R	230 lm	122 lm	80	10	50000 h	○	303451
3,5 W	3000	R	150 lm	100 lm	80	10	50000 h	○	303450



QUASAR 10 2WB

IK02 0.20J xx0


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
6 W	4000	R	460 lm	235 lm	80	10	50000 h	●	303361
6 W	3000	R	300 lm	192 lm	80	10	50000 h	●	303360
6 W	4000	R	460 lm	235 lm	80	10	50000 h	●	303363
6 W	3000	R	300 lm	192 lm	80	10	50000 h	●	303362
6 W	4000	R	460 lm	235 lm	80	10	50000 h	○	303453
6 W	3000	R	300 lm	192 lm	80	10	50000 h	○	303452



QUASAR 10 4WB

IK02 0.20J xx0


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10,8 W	4000	R	920 lm	402 lm	80	10	50000 h	●	303349
10,8 W	3000	R	600 lm	329 lm	80	10	50000 h	●	303348
10,8 W	4000	R	920 lm	402 lm	80	10	50000 h	●	303351
10,8 W	3000	R	600 lm	329 lm	80	10	50000 h	●	303350
10,8 W	4000	R	920 lm	402 lm	80	10	50000 h	○	303449
10,8 W	3000	R	600 lm	329 lm	80	10	50000 h	○	303448



QUASAR 10 1NB+1WB


IK02 0.20J xx0

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
6 W	4000	R	460 lm	141 lm	80	10	50000 h	●	303367
6 W	3000	R	300 lm	113 lm	80	10	50000 h	●	303366
6 W	4000	R	460 lm	141 lm	80	10	50000 h	●	303369
6 W	3000	R	300 lm	113 lm	80	10	50000 h	●	303368
6 W	4000	R	460 lm	141 lm	80	10	50000 h	○	303455
6 W	3000	R	300 lm	113 lm	80	10	50000 h	○	303454



QUASAR 20

design by R. Fiorato - F. Pagliarini



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

QUASAR 20 TECH

IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
12,5 W	4000	A30/M	1192 lm	765 lm	80	10	50000 h	●	303535
12,5 W	3000	A30/M	1138 lm	695 lm	80	10	50000 h	●	303536
12,5 W	4000	A30/M	1192 lm	765 lm	80	10	50000 h	●	303533
12,5 W	3000	A30/M	1138 lm	695 lm	80	10	50000 h	●	303534
12,5 W	4000	A30/M	1192 lm	765 lm	80	10	50000 h	○	303531
12,5 W	3000	A30/M	1138 lm	695 lm	80	10	50000 h	○	303532

QUASAR 20 DOUBLE TECH

IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
23 W	4000	A30/M	2384 lm	1332 lm	80	10	50000 h	●	304100
23 W	3000	A30/M	2276 lm	1211 lm	80	10	50000 h	●	304097
23 W	4000	A30/M	2384 lm	1332 lm	80	10	50000 h	●	304101
23 W	3000	A30/M	2276 lm	1211 lm	80	10	50000 h	●	304098
23 W	4000	A30/M	2384 lm	1332 lm	80	10	50000 h	○	304099
23 W	3000	A30/M	2276 lm	1211 lm	80	10	50000 h	○	304096

QUASAR 20 M




IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
12,5 W	4000	S/EW	1192 lm	448 lm	80	10	50000 h	●	303541
12,5 W	3000	S/EW	1138 lm	407 lm	80	10	50000 h	●	303542
12,5 W	4000	S/EW	1192 lm	448 lm	80	10	50000 h	●	303539
12,5 W	3000	S/EW	1138 lm	407 lm	80	10	50000 h	●	303540
12,5 W	4000	S/EW	1192 lm	448 lm	80	10	50000 h	○	303537
12,5 W	3000	S/EW	1138 lm	407 lm	80	10	50000 h	○	303538

QUASAR 20 B


IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
23 W	4000	S/EW	2384 lm	910 lm	80	10	50000 h	●	303547
23 W	3000	S/EW	2276 lm	827 lm	80	10	50000 h	●	303548
23 W	4000	S/EW	2384 lm	910 lm	80	10	50000 h	●	303545
23 W	3000	S/EW	2276 lm	827 lm	80	10	50000 h	●	303546
23 W	4000	S/EW	2384 lm	910 lm	80	10	50000 h	○	303543
23 W	3000	S/EW	2276 lm	827 lm	80	10	50000 h	○	303544



QUASAR 30

design by R. Fiorato - F. Pagliarini



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

QUASAR 30 TECH

IK07 2J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
23 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	●	303553
23 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	●	303554
23 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	●	303551
23 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	●	303552
23 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	○	303549
23 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	○	303550



QUASAR 30 DOUBLE TECH

IK07 2J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
32 W	4000	A30/M	3920 lm	2251 lm	80	10	50000 h	●	304106
32 W	3000	A30/M	3744 lm	2046 lm	80	10	50000 h	●	304103
32 W	4000	A30/M	3920 lm	2251 lm	80	10	50000 h	●	304107
32 W	3000	A30/M	3744 lm	2046 lm	80	10	50000 h	●	304104
32 W	4000	A30/M	3920 lm	2251 lm	80	10	50000 h	○	304105
32 W	3000	A30/M	3744 lm	2046 lm	80	10	50000 h	○	304102



QUASAR 30 M

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
23 W	4000	S/EW	2384 lm	681 lm	80	10	50000 h	●	303559
23 W	3000	S/EW	2276 lm	623 lm	80	10	50000 h	●	303560
23 W	4000	S/EW	2384 lm	681 lm	80	10	50000 h	●	303557
23 W	3000	S/EW	2276 lm	623 lm	80	10	50000 h	●	303558
23 W	4000	S/EW	2384 lm	681 lm	80	10	50000 h	○	303555
23 W	3000	S/EW	2276 lm	623 lm	80	10	50000 h	○	303556



QUASAR 30 B

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
32 W	4000	S/EW	3920 lm	1148 lm	80	10	50000 h	●	303565
32 W	3000	S/EW	3744 lm	1044 lm	80	10	50000 h	●	303566
32 W	4000	S/EW	3920 lm	1148 lm	80	10	50000 h	●	303563
32 W	3000	S/EW	3744 lm	1044 lm	80	10	50000 h	●	303564
32 W	4000	S/EW	3920 lm	1148 lm	80	10	50000 h	○	303561
32 W	3000	S/EW	3744 lm	1044 lm	80	10	50000 h	○	303562



QUASAR 30 TECH EM/3P


IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED- Emergency 3h 220-240 V 50/60 Hz									
23 W+1,1 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	●	304346
23 W+1,1 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	●	304345
23 W+1,1 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	●	304197
23 W+1,1 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	●	304196
23 W+1,1 W	4000	A30/M	2384 lm	1505 lm	80	10	50000 h	○	304348
23 W+1,1 W	3000	A30/M	2276 lm	1350 lm	80	10	50000 h	○	304347



QUASAR 60

design by R. Fiorato - F. Pagliarini

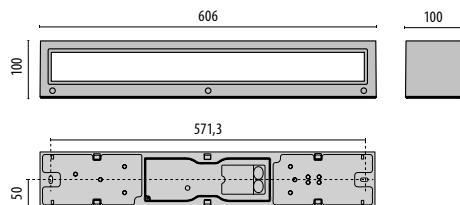


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite grey / Textured
- WH-87 / White / Textured

QUASAR 60 TECH

IK07 2J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
19 W	4000	A22/EW	2736 lm	2078 lm	80	10	130000 h	●	3100815
19 W	3000	A22/EW	2554 lm	2050 lm	80	10	130000 h	●	3100812
19 W	4000	A22/EW	2736 lm	2078 lm	80	10	130000 h	●	3100816
19 W	3000	A22/EW	2554 lm	2050 lm	80	10	130000 h	●	3100813
19 W	4000	A22/EW	2736 lm	2078 lm	80	10	130000 h	○	3100817
19 W	3000	A22/EW	2554 lm	2050 lm	80	10	130000 h	○	3100814



QUASAR 60 DOUBLE TECH

IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
38 W	4000	A22/EW	5472 lm	4082 lm	80	10	130000 h	●	3100851
38 W	3000	A22/EW	5107 lm	4026 lm	80	10	130000 h	●	3100848
38 W	4000	A22/EW	5472 lm	4082 lm	80	10	130000 h	●	3100852
38 W	3000	A22/EW	5107 lm	4026 lm	80	10	130000 h	●	3100849
38 W	4000	A22/EW	5472 lm	4082 lm	80	10	130000 h	○	3100853
38 W	3000	A22/EW	5107 lm	4026 lm	80	10	130000 h	○	3100850




QUASAR 60 M

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100821
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100818
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100822
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100819
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	○	3100823
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	○	3100820

Power LED - dimmable DALI 220-240 V 50/60 Hz


19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100833
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100830
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100834
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100831
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	○	3100835
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	○	3100832



QUASAR 60 M EM/3P

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED - Emergency 3h 220-240 V 50/60 Hz									
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100845
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100842
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	●	3100846
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	●	3100843
19 W	4000	A7/EW	2736 lm	1655 lm	80	10	130000 h	○	3100847
19 W	3000	A7/EW	2554 lm	1631 lm	80	10	130000 h	○	3100844





QUASAR 60 B

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	●	3100857
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	●	3100854
38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	●	3100858
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	●	3100855
38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	○	3100859
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	○	3100856

Power LED - dimmable DALI 220-240 V 50/60 Hz

38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	●	3100869
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	●	3100866
38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	●	3100870
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	●	3100867
38 W	4000	A7/EW	5472 lm	3250 lm	80	10	130000 h	○	3100871
38 W	3000	A7/EW	5107 lm	3204 lm	80	10	130000 h	○	3100868



Glass diffuser,
internally
painted for
homogeneous
diffused light for
M / B versions.




Flat
micropismatic
glass diffuser
internally
patterned for TECH
/ DOUBLE TECH
versions.



The
fitting is
suitable
for
through-
wiring.

POLO+




- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


POLO+ ZERO S/EW

IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
6,5 W	4000	S/EW	742 lm	271 lm	70	10	35000 h	●	304546
6,5 W	3000	S/EW	675 lm	237 lm	70	10	35000 h	●	304545
6,5 W	4000	S/EW	742 lm	271 lm	70	10	35000 h	○	304548
6,5 W	3000	S/EW	675 lm	237 lm	70	10	35000 h	○	304547





Suitable on standard recessed box (503).



POLO+ 1 S/EW

IK05 0.70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
11,5 W	4000	S/EW	1485 lm	488 lm	70	10	35000 h	●	304552
11,5 W	3000	S/EW	1350 lm	474 lm	70	10	35000 h	●	304551
11,5 W	4000	S/EW	1485 lm	488 lm	70	10	35000 h	○	304554
11,5 W	3000	S/EW	1350 lm	474 lm	70	10	35000 h	○	304553




POLO+ 2 A/EW

IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
11,5 W	4000	A/EW	1485 lm	451 lm	70	10	35000 h	●	304558
11,5 W	3000	A/EW	1350 lm	438 lm	70	10	35000 h	●	304557
11,5 W	4000	A/EW	1485 lm	451 lm	70	10	35000 h	○	304560
11,5 W	3000	A/EW	1350 lm	438 lm	70	10	35000 h	○	304559







POLO+ 2/I A/EW

IK05 0.70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
11,5 W	4000	A/EW	1485 lm	451 lm	70	10	35000 h	● 304974	
11,5 W	3000	A/EW	1350 lm	438 lm	70	10	35000 h	● 304973	
11,5 W	4000	A/EW	1485 lm	451 lm	70	10	35000 h	○ 304976	
11,5 W	3000	A/EW	1350 lm	438 lm	70	10	35000 h	○ 304975	




POLO+ 3 A/EW

IK05 0.70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
17 W	4000	A/EW	2225 lm	673 lm	70	10	35000 h	● 304564	
17 W	3000	A/EW	2025 lm	620 lm	70	10	35000 h	● 304563	
17 W	4000	A/EW	2225 lm	673 lm	70	10	35000 h	○ 304566	
17 W	3000	A/EW	2025 lm	620 lm	70	10	35000 h	○ 304565	




POLO+ ZERO




POLO+ 1




POLO+ 2



POLO+ 3



MIMIK 10




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

MIMIK 10 M C/I

IK05 0,70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
5 W	4000	C/I	593 lm	432 lm	80	10	60000 h	●	304851
5 W	3000	C/I	561 lm	379 lm	80	10	60000 h	●	304848
5 W	4000	C/I	593 lm	432 lm	80	10	60000 h	●	304850
5 W	3000	C/I	561 lm	379 lm	80	10	60000 h	●	304847
5 W	4000	C/I	593 lm	432 lm	80	10	60000 h	○	304852
5 W	3000	C/I	561 lm	379 lm	80	10	60000 h	○	304849



MIMIK 10 M CP/T3

IK05 0,70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
5 W	4000	CP/T3	593 lm	358 lm	80	10	60000 h	●	304857
5 W	3000	CP/T3	561 lm	314 lm	80	10	60000 h	●	304854
5 W	4000	CP/T3	593 lm	358 lm	80	10	60000 h	●	304856
5 W	3000	CP/T3	561 lm	314 lm	80	10	60000 h	●	304853
5 W	4000	CP/T3	593 lm	358 lm	80	10	60000 h	○	304858
5 W	3000	CP/T3	561 lm	314 lm	80	10	60000 h	○	304855



MIMIK 10 B C/I

IK05 0,70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	C/I	1120 lm	888 lm	80	10	60000 h	●	304863
10 W	3000	C/I	1040 lm	779 lm	80	10	60000 h	●	304860
10 W	4000	C/I	1120 lm	888 lm	80	10	60000 h	●	304862
10 W	3000	C/I	1040 lm	779 lm	80	10	60000 h	●	304859
10 W	4000	C/I	1120 lm	888 lm	80	10	60000 h	○	304864
10 W	3000	C/I	1040 lm	779 lm	80	10	60000 h	○	304861




MIMIK 10 B CP/T3+C/I

IK05 0,70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	-	1120 lm	806 lm	80	10	60000 h	●	304869
10 W	3000	-	1040 lm	707 lm	80	10	60000 h	●	304866
10 W	4000	-	1120 lm	806 lm	80	10	60000 h	●	304868
10 W	3000	-	1040 lm	707 lm	80	10	60000 h	●	304865
10 W	4000	-	1120 lm	806 lm	80	10	60000 h	○	304870
10 W	3000	-	1040 lm	707 lm	80	10	60000 h	○	304867



MIMIK 10 FLAT




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

MIMIK 10 FLAT M

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
5 W	4000	A/W	700 lm	473 lm	80	10	60000 h	●	304827
5 W	3000	A/W	650 lm	451 lm	80	10	60000 h	●	304824
5 W	4000	A/W	700 lm	473 lm	80	10	60000 h	●	304826
5 W	3000	A/W	650 lm	451 lm	80	10	60000 h	●	304823
5 W	4000	A/W	700 lm	473 lm	80	10	60000 h	○	304828
5 W	3000	A/W	650 lm	451 lm	80	10	60000 h	○	304825




MIMIK 10 FLAT B

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	A/W	1357 lm	925 lm	80	10	60000 h	●	304833
10 W	3000	A/W	1140 lm	880 lm	80	10	60000 h	●	304830
10 W	4000	A/W	1357 lm	925 lm	80	10	60000 h	●	304832
10 W	3000	A/W	1140 lm	880 lm	80	10	60000 h	●	304829
10 W	4000	A/W	1357 lm	925 lm	80	10	60000 h	○	304834
10 W	3000	A/W	1140 lm	880 lm	80	10	60000 h	○	304831



MIMIK 20

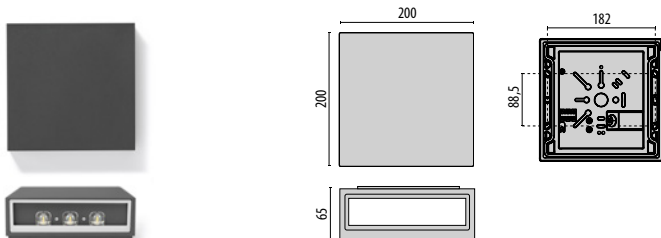


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

MIMIK 20 CP/T2

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	CP/T2	3360 lm	2292 lm	80	10	60000 h	●	303752
26 W	3000	CP/T2	3120 lm	2256 lm	80	10	60000 h	●	303754
26 W	4000	CP/T2	3360 lm	2292 lm	80	10	60000 h	●	303753
26 W	3000	CP/T2	3120 lm	2256 lm	80	10	60000 h	●	303755
26 W	4000	CP/T2	3360 lm	2292 lm	80	10	60000 h	○	303841
26 W	3000	CP/T2	3120 lm	2256 lm	80	10	60000 h	○	303840



MIMIK 20 CP/T3

IK06 1J xx3



WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	CP/T3	3360 lm	2309 lm	80	10	60000 h	●	303756
26 W	3000	CP/T3	3120 lm	2273 lm	80	10	60000 h	●	303758
26 W	4000	CP/T3	3360 lm	2309 lm	80	10	60000 h	●	303757
26 W	3000	CP/T3	3120 lm	2273 lm	80	10	60000 h	●	303759
26 W	4000	CP/T3	3360 lm	2309 lm	80	10	60000 h	○	303733
26 W	3000	CP/T3	3120 lm	2273 lm	80	10	60000 h	○	303734



MIMIK 20 A60/W


IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	A60/W	3360 lm	2183 lm	80	10	60000 h	●	303760
26 W	3000	A60/W	3120 lm	2149 lm	80	10	60000 h	●	303762
26 W	4000	A60/W	3360 lm	2183 lm	80	10	60000 h	●	303761
26 W	3000	A60/W	3120 lm	2149 lm	80	10	60000 h	●	303763
26 W	4000	A60/W	3360 lm	2183 lm	80	10	60000 h	○	303735
26 W	3000	A60/W	3120 lm	2149 lm	80	10	60000 h	○	303736



OPTIONAL ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
MIMIK CP/T2 - CP/T3 - A60/W		
Customising ring	●	310444
Customising ring	●	310445
Customising ring	○	310449




MIMIK



310444 - GR-94
310445 - AN-96
310449 - WH-87

MIMIK 20 FLAT

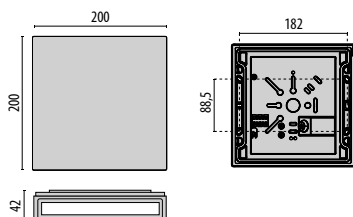


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

MIMIK 20 FLAT M

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
13,5 W	4000	A/W	1710 lm	1042 lm	80	10	60000 h	●	303744
13,5 W	3000	A/W	1653 lm	960 lm	80	10	60000 h	●	303746
13,5 W	4000	A/W	1710 lm	1042 lm	80	10	60000 h	●	303745
13,5 W	3000	A/W	1653 lm	960 lm	80	10	60000 h	●	303747
13,5 W	4000	A/W	1710 lm	1042 lm	80	10	60000 h	○	303795
13,5 W	3000	A/W	1653 lm	960 lm	80	10	60000 h	○	303842



MIMIK 20 FLAT B

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
24 W	4000	A/W	3420 lm	2095 lm	80	10	60000 h	●	303748
24 W	3000	A/W	3306 lm	1930 lm	80	10	60000 h	●	303750
24 W	4000	A/W	3420 lm	2095 lm	80	10	60000 h	●	303749
24 W	3000	A/W	3306 lm	1930 lm	80	10	60000 h	●	303751
24 W	4000	A/W	3420 lm	2095 lm	80	10	60000 h	○	303797
24 W	3000	A/W	3306 lm	1930 lm	80	10	60000 h	○	303794



ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
MIMIK FLAT M		
FLAT M Customising ring	●	310440
FLAT M Customising ring	●	310441
FLAT M Customising ring	○	310450
MIMIK FLAT B		
FLAT B Customising ring	●	310442
FLAT B Customising ring	●	310443
FLAT B Customising ring	○	310451



The frame which is available as an accessory, allows the panel to be installed on the luminaire front. The panel can be plastered to match the finish of the wall on which it is to be installed.



MIMIK FLAT



310440 - GR-94
310441 - AN-96
310450 - WH-87




310442 - GR-94
310443 - AN-96
310451 - WH-87



(consult factory)

MIMIK 30

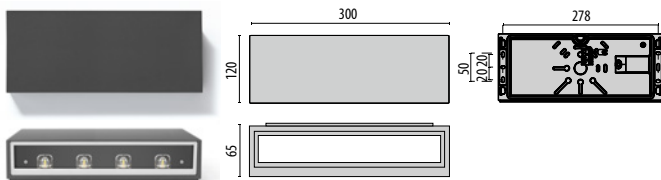


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

MIMIK 30 CP/T2

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
30 W	4000	CP/T2	4480 lm	2700 lm	80	10	60000 h	●	303802
30 W	3000	CP/T2	4160 lm	2506 lm	80	10	60000 h	●	303804
30 W	4000	CP/T2	4480 lm	2700 lm	80	10	60000 h	●	303803
30 W	3000	CP/T2	4160 lm	2506 lm	80	10	60000 h	●	303805
30 W	4000	CP/T2	4480 lm	2700 lm	80	10	60000 h	○	303845
30 W	3000	CP/T2	4160 lm	2506 lm	80	10	60000 h	○	303846



MIMIK 30 CP/T3

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
30 W	4000	CP/T3	4480 lm	2755 lm	80	10	60000 h	●	303806
30 W	3000	CP/T3	4160 lm	2558 lm	80	10	60000 h	●	303808
30 W	4000	CP/T3	4480 lm	2755 lm	80	10	60000 h	●	303807
30 W	3000	CP/T3	4160 lm	2558 lm	80	10	60000 h	●	303809
30 W	4000	CP/T3	4480 lm	2755 lm	80	10	60000 h	○	303847
30 W	3000	CP/T3	4160 lm	2558 lm	80	10	60000 h	○	303848




MIMIK 30 A60/W

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
30 W	4000	A60/W	4480 lm	2558 lm	80	10	60000 h	●	303810
30 W	3000	A60/W	4160 lm	2373 lm	80	10	60000 h	●	303812
30 W	4000	A60/W	4480 lm	2558 lm	80	10	60000 h	●	303811
30 W	3000	A60/W	4160 lm	2373 lm	80	10	60000 h	●	303813
30 W	4000	A60/W	4480 lm	2558 lm	80	10	60000 h	○	303849
30 W	3000	A60/W	4160 lm	2373 lm	80	10	60000 h	○	303850



MIMIK 30 FLAT

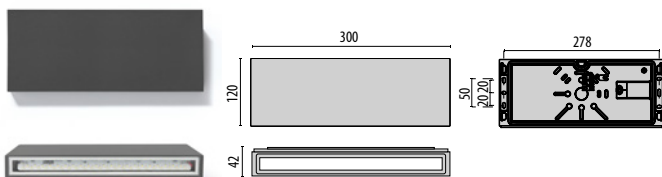


- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

MIMIK 30 FLAT


IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
20 W	4000	A/W	2736 lm	1597 lm	80	10	60000 h	●	303798
20 W	3000	A/W	2644 lm	1506 lm	80	10	60000 h	●	303800
20 W	4000	A/W	2736 lm	1597 lm	80	10	60000 h	●	303799
20 W	3000	A/W	2644 lm	1506 lm	80	10	60000 h	●	303801
20 W	4000	A/W	2736 lm	1597 lm	80	10	60000 h	○	303843
20 W	3000	A/W	2644 lm	1506 lm	80	10	60000 h	○	303844




ACCESSORIES


DESCRIPTION	COLOUR	PART NUMBER
MIMIK FLAT		
FLAT Customising ring	●	310446
FLAT Customising ring	●	310447
FLAT Customising ring	○	310448




The frame which is available as an accessory, allows the panel to be installed on the luminaire front. The panel can be plastered to match the finish of the wall on which it is to be installed.



MIMIK FLAT





310446 - GR-94
310447 - AN-96
310448 - WH-87



(consult factory)



MIMIK 10 CEILING




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

MIMIK 10 CEILING C/I

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	C/I	1120 lm	690 lm	80	10	60000 h	●	304875
10 W	3000	C/I	1040 lm	600 lm	80	10	60000 h	●	304872
10 W	4000	C/I	1120 lm	690 lm	80	10	60000 h	●	304874
10 W	3000	C/I	1040 lm	600 lm	80	10	60000 h	●	304871
10 W	4000	C/I	1120 lm	690 lm	80	10	60000 h	○	304876
10 W	3000	C/I	1040 lm	600 lm	80	10	60000 h	○	304873




MIMIK 10 CEILING TECH

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	C/EW	1120 lm	806 lm	80	10	60000 h	●	304881
10 W	3000	C/EW	1040 lm	701 lm	80	10	60000 h	●	304878
10 W	4000	C/EW	1120 lm	806 lm	80	10	60000 h	●	304880
10 W	3000	C/EW	1040 lm	701 lm	80	10	60000 h	●	304877
10 W	4000	C/EW	1120 lm	806 lm	80	10	60000 h	○	304882
10 W	3000	C/EW	1040 lm	701 lm	80	10	60000 h	○	304879



QUASAR 10 CEILING



design by R. Fiorato - F. Pagliarini




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


QUASAR 10 CEILING

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 230 V 50 Hz									
5 W	4000	S/EW	500 lm	255 lm	70	10	60000 h	●	304488
5 W	3000	S/EW	500 lm	221 lm	70	10	60000 h	●	304487
5 W	4000	S/EW	500 lm	255 lm	70	10	60000 h	●	304490
5 W	3000	S/EW	500 lm	221 lm	70	10	60000 h	●	304489
5 W	4000	S/EW	500 lm	255 lm	70	10	60000 h	○	304492
5 W	3000	S/EW	500 lm	221 lm	70	10	60000 h	○	304491



QUASAR 30 CEILING



design by R. Fiorato - F. Pagliarini




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions


QUASAR 30 CEILING TECH

IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
23 W	4000	S/I	2384 lm	1652 lm	80	10	50000 h	●	306177
23 W	3000	S/I	2276 lm	1482 lm	80	10	50000 h	●	306178
23 W	4000	S/I	2384 lm	1652 lm	80	10	50000 h	●	306175
23 W	3000	S/I	2276 lm	1482 lm	80	10	50000 h	●	306176
23 W	4000	S/I	2384 lm	1652 lm	80	10	50000 h	○	306174
23 W	3000	S/I	2276 lm	1482 lm	80	10	50000 h	○	306131



INSERT+ ZERO




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ ZERO


IK08 5J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
5 W	4000	A29/M	530 lm	142 lm	90	10	36000 h	●	304111
5 W	3000	A29/M	511 lm	125 lm	90	10	36000 h	●	304110
5 W	4000	A29/M	530 lm	142 lm	90	10	36000 h	●	304113
5 W	3000	A29/M	511 lm	125 lm	90	10	36000 h	●	304112
5 W	4000	A29/M	530 lm	142 lm	90	10	36000 h	○	304109
5 W	3000	A29/M	511 lm	125 lm	90	10	36000 h	○	304108



INSERT+ ZERO CLIP

(NO VISIBLE SCREWS)




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

INSERT+ ZERO CLIP

IK08 5J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
5 W	3000	A/M	511 lm	142 lm	80	10	60000 h	●	3100064
5 W	3000	A/M	511 lm	142 lm	80	10	60000 h	●	3100066
5 W	3000	A/M	511 lm	142 lm	80	10	60000 h	○	3100062



Recessed
box (503)
included.

The fitting is suitable for through-wiring.

INSERT+ 1



IK07 2J xx5

INSERT+ 1


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
7 W	4000	A37/M	850 lm	275 lm	80	10	60000 h	●	304117
7 W	3000	A37/M	825 lm	250 lm	80	10	60000 h	●	304116
7 W	4000	A37/M	850 lm	275 lm	80	10	60000 h	●	304119
7 W	3000	A37/M	825 lm	250 lm	80	10	60000 h	●	304118
7 W	4000	A37/M	850 lm	275 lm	80	10	60000 h	○	304115
7 W	3000	A37/M	825 lm	250 lm	80	10	60000 h	○	304114



- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured



INSERT+ 1 MARINE




IK07 2J xx5

INSERT+ 1 MARINE

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
7 W	4000	A37/M	850 lm	354 lm	80	10	60000 h	●	304792
7 W	3000	A37/M	825 lm	325 lm	80	10	60000 h	●	304791




- BR-10 / Natural brass / Glossy




ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Adaptor INSERT+ 1	○	310476
Adaptor INSERT+ 1	●	310477
Adaptor INSERT+ 1	●	310478
Recessed box INSERT+ 1	-	310475



INSERT+ 2




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

Consult factory for DALI versions

INSERT+ 2

IK07 2J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	A25/W	1410 lm	553 lm	80	10	60000 h	●	304123
10 W	3000	A25/W	1350 lm	503 lm	80	10	60000 h	●	304122
10 W	4000	A25/W	1410 lm	553 lm	80	10	60000 h	●	304125
10 W	3000	A25/W	1350 lm	503 lm	80	10	60000 h	●	304124
10 W	4000	A25/W	1410 lm	553 lm	80	10	60000 h	○	304121
10 W	3000	A25/W	1350 lm	503 lm	80	10	60000 h	○	304120



INSERT+ 1/2 are provided prewired with brass cable clamp.



INSERT+ 1/2 recess box are equipped with a cover with spirit levels.




Pre-wired with 0,2 m H05RN-F cable + IP 68 Fast Connector.

ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Adaptor INSERT+ 2	○	310487
Adaptor INSERT+ 2	●	310488
Adaptor INSERT+ 2	●	310489
Recessed box INSERT+ 2	-	310490
Connection Kit Y 3-way Ø 14-17 mm IP 68	-	310495
Connection Kit Y 3-way Ø 7-10,5 mm IP 68	-	310496



310495 - Ø 14-17 mm
310496 - Ø 7-10,5 mm



310487
310488
310489



310490

INSERT+ 1/2 RECESSED WALL INSTALLATION

Recessed box




Complete unit

1A+1B = please order 2 codes


COMPONENTS

- A** luminaire
B recessed fixing kit




INSERT +1



INSERT +2



Adaptor kit to existing **PRISMA** INSERT, INSERT FV, INSERT GO 1/2 recessed boxes

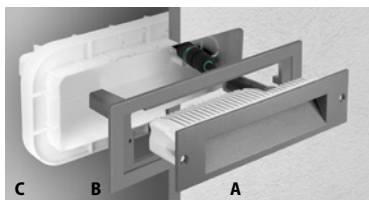

Complete unit

1A+1B = please order 2 codes


COMPONENTS

- A** luminaire
B adaptor
C recessed fixing kit


INSERT 1
INSERT 1 FV
INSERT 1 GO




INSERT 2
INSERT 2 FV
INSERT 2 GO




INSERT +1



INSERT +2



INSERT+ 3




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

Consult factory for DALI versions

INSERT+ 3 A/W

IK10 20J xx9

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
27 W	4000	A/W	4140 lm	1592 lm	80	10	60000 h	●	3100879
27 W	3000	A/W	4020 lm	1502 lm	80	10	60000 h	●	3100877
27 W	4000	A/W	4140 lm	1592 lm	80	10	60000 h	●	3100878
27 W	3000	A/W	4020 lm	1502 lm	80	10	60000 h	●	3100876




A29/W

INSERT+ 3 A26/W

IK10 20J xx9

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
26 W	4000	A26/W	3585 lm	1399 lm	80	10	125000 h	●	3100875
26 W	3000	A26/W	3450 lm	1388 lm	80	10	125000 h	●	3100881
26 W	4000	A26/W	3585 lm	1399 lm	80	10	125000 h	●	3100882
26 W	3000	A26/W	3450 lm	1388 lm	80	10	125000 h	●	3100880



A26/W



A/W
Diffuser in flat
glass, internally
frosted.



A26/W
Tempered clear
glass diffuser.



Pre-wired
with 0,5 m
H05RN-F
cable +
IP 68 Fast
Connector.

ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Recessed box INSERT+ 3	-	3100883
Connection Kit Y 3-way Ø 14-17 mm IP 68	-	310495
Connection Kit Y 3-way Ø 7-10,5 mm IP 68	-	310496
Stainless steel, anti-tamper locking screws	-	3100992



310495 - Ø 14-17 mm
310496 - Ø 7-10,5 mm




3100883



3100992

STILO+




STILO+MINI BASIC

IK06 1J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1480 lm	944 lm	-	10	39000 h	●	3101651
10 W	3000	S/EW	1435 lm	894 lm	-	10	39000 h	●	3101973
10 W	4000	S/EW	1480 lm	944 lm	-	10	39000 h	●	3101652
10 W	3000	S/EW	1435 lm	894 lm	-	10	39000 h	●	3101974

- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured




STILO+MIDI BASIC

IK06 1J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	S/EW	1480 lm	975 lm	-	10	39000 h	●	3101653
10 W	3000	S/EW	1435 lm	928 lm	-	10	39000 h	●	3101975
10 W	4000	S/EW	1480 lm	975 lm	-	10	39000 h	●	3101654
10 W	3000	S/EW	1435 lm	928 lm	-	10	39000 h	●	3101976



STILO+ BASIC is pre-wired with 0,2 m H05RN-F cable.

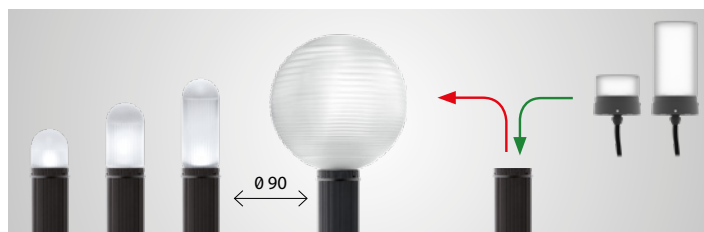


STILO+ BASIC is suitable for LED re-lamping of [PRISMA](#) STILO Ø 90 mm poles.

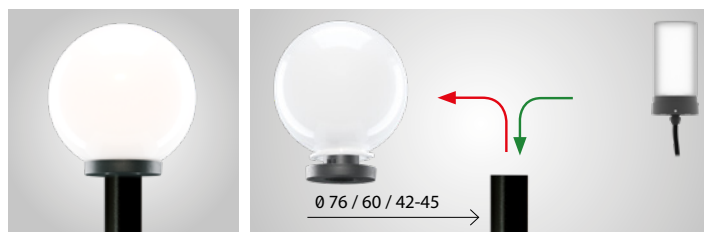


STILO+ BASIC is suitable for LED re-lamping on third-parties metallic / fiberglass Ø 76, 60, 42/45 mm poles.

MIMIK 10 POST



zone
PMR






- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured

MIMIK 10 POST 1000

IK08 5J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
10 W	4000	CP/T3	1076 lm	762 lm	80	10	60000 h	●	306555
10 W	3000	CP/T3	1000 lm	719 lm	80	10	60000 h	●	306554
10 W	4000	CP/T3	1076 lm	762 lm	80	10	60000 h	●	306553
10 W	3000	CP/T3	1000 lm	719 lm	80	10	60000 h	●	306552




MIMIK 10 POST 600

IK08 5J xx5

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
11 W	4000	A/I	1075 lm	915 lm	80	10	60000 h	●	304615
11 W	3000	A/I	1006 lm	745 lm	80	10	60000 h	●	304613
11 W	4000	A/I	1075 lm	915 lm	80	10	60000 h	●	304616
11 W	3000	A/I	1006 lm	745 lm	80	10	60000 h	●	304614



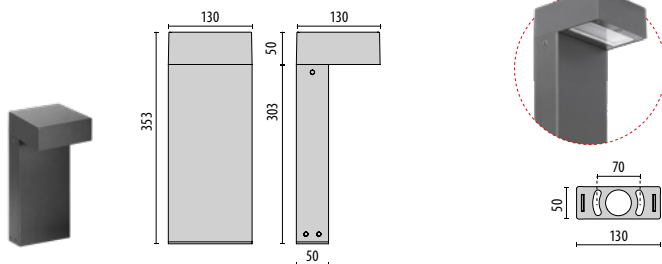

MIMIK 10 POST 300

IK08 5J xx5


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
11 W	4000	A/I	1075 lm	915 lm	80	10	60000 h	●	304619
11 W	3000	A/I	1006 lm	745 lm	80	10	60000 h	●	304617
11 W	4000	A/I	1075 lm	915 lm	80	10	60000 h	●	304620
11 W	3000	A/I	1006 lm	745 lm	80	10	60000 h	●	304618



All MIMIK 10
POST fittings
are pre-wired
with 0,2 m
H05RN-F cable
+ IP 68 Fast
Connector.


ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Connection Kit Y 3-way Ø 7-10,5 mm IP 68		310496
Baseplate 273x273 mm		consult factory





PADO 600




IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● GR-94	304086
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● AN-96	304084
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● BK-81	304087
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● BK-81	304085



PADO 900




IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● GR-94	304090
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● AN-96	304088
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● BK-81	304091
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● BK-81	304089



PADO 1200






IK05 0.70J xx3

WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● GR-94	306354
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● AN-96	306352
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	● BK-81	306355
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	● BK-81	306353




- GR-94 / Metallic grey / Textured
- AN-96 / Anthracite gray / Textured
- BK-81 / Black / Textured





PADO



IK05 0.70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	●	304094
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	●	304092
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	●	304095
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	●	304093
20 W	4000	S/EW	2061 lm	1160 lm	80	10	60000 h	●	30409490100
20 W	3000	S/EW	1974 lm	1080 lm	80	10	60000 h	●	30409290100



PADO and PADO BASIC are pre-wired with 0,2 m H05RN-F cable. PADO with IP 68 Fast Connector.



PADO BASIC




IK05 0.70J xx3


WATTAGE	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz									
9,5 W	4000	S/EW	1494 lm	859 lm	80	10	60000 h	●	306290
9,5 W	3000	S/EW	1417 lm	823 lm	80	10	60000 h	●	306289

ACCESSORIES

DESCRIPTION	COLOUR	PART NUMBER
Connection Kit Ø 7-10,5 mm IP68.		310513
Pole top adaptor Ø 45 mm PADO	●	310481
Pole top adaptor Ø 45 mm PADO	●	310482



310513
Ø 7-10,5 mm

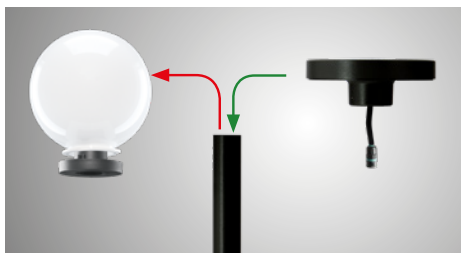

PADO and PADO BASIC are suitable for LED re-lamping on third-parties metallic / fiberglass Ø 60, 42/45 mm poles.

PERFORMANCE **iN** LIGHTING

The data contained in this brochure is for reference purposes only and does not involve any commitment by Performance iN Lighting S.p.A., which reserves the right to make all necessary changes without prior notice. Partial or complete reproduction of this brochure is forbidden.



PERFORMANCE iN LIGHTING S.p.A.

Viale del Lavoro 9/11

37030 Colognola ai Colli (VR) - Italia

Ph +39 045 61 59 211

Fax +39 045 61 59 292

www.performanceinlighting.com

