

# RONDO



BVCert. 6037554




Design: Xavier Houy

Rondo, the luminaire with a timeless look, that's designed to last.

Surface or flush mounted, the most powerful and robust of the architectural luminaires for communal areas in residential properties and outdoors.

- **More powerful**  
Up to 42 W fluorescent or LED 3200 lm.
- **More efficient**  
Thanks to its lighting management: DALI ballasts and LED and fluorescent dimming solutions.
- **Greater savings**  
With the new Sensor Pro detectors or twilight switches built in.

- 1 3.5 mm polycarbonate diffuser (120 J)
- 2 Vandal resistant screws
- 3 Marine-grade aluminium rip-out-resistant skirt
- 4 Supplied c/w sealing washers
- 5 Knock-out cable entries (2 sides, 1 central)

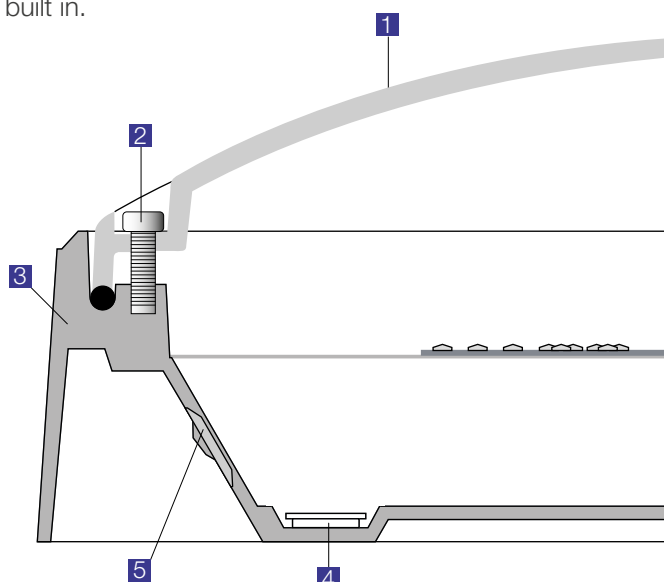



# RONDO

## IK10++ / 120 J



Surface or flush mounted,  
the most powerful and robust  
of the architectural luminaires.



Rondo

Rondino

#### Features:

- Architectural luminaire, 120-joules resistance
- Available in two sizes
- Die-cast marine-grade aluminium base
- Opal polycarbonate diffuser (except for Rondo fluo: clear frosted)
- Stainless steel vandal-resistant screws
- Plug-in gear tray



■ RAL9005    □ RAL9016    ■ RAL9006

#### Options available on request:


- 3000 K LEDs
- Version with emergency pack
- Stand-by LED
- Class 2
- Twilight photocell

🔧 Vandal-resistant tool (bit) to be ordered separately  
code: 9800 0003

📶 Radio remote control to be ordered separately  
code: 9800 0010




ø 330 mm (Rondo)  
ø 270 mm (Rondino)




114 mm (Rondo)  
97 mm (Rondino)

Rondo - code: 2520 0400



Rondino - code: 2560 0400



| LED modules | Power (W) | Luminaire light output (lm) | Luminaire efficacy (lm/W) | CCT (K) (CRI min.) | White      | Grey       | Black      |
|-------------|-----------|-----------------------------|---------------------------|--------------------|------------|------------|------------|
| LED 1800    | 16        | 1234                        | 77                        | 4000 (80)          | 2520 04 .. | 2520 14 .. | 2520 24 .. |
| LED 2400    | 20        | 1665                        | 83                        | 4000 (80)          | 2523 04 .. | 2523 14 .. | 2523 24 .. |
| LED 3200    | 32        | 2211                        | 69                        | 4000 (80)          | 2521 04 .. | 2521 14 .. | 2521 24 .. |

Coding:

replace the two dashes (--) by the corresponding figures: e.g. 2520 04 ..

- 00 no detection
- 20 DALI dimmable
- 12 with Pro detection
- 13 with Pro detection + extinction or standby warning
- 16 with Pro detection + radio-control
- 17 with Pro detection + extinction or standby warning + radio-control
- 03 slave version + extinction or stand-by warning
- 07 slave version + extinction or stand-by warning + radio-control

## RONDO FLUO

| Designation    | Base    | White      | Grey       | Black      |
|----------------|---------|------------|------------|------------|
| 2 x 18 W TC-DE | G24q-2  | 2500 04 .. | 2500 14 .. | 2500 24 .. |
| 1 x 26 W TC-DE | GX24q-3 | 2501 04 .. | 2501 14 .. | 2501 24 .. |
| 1 x 32 W TC-TE | GX24q-3 | 2502 04 .. | 2502 14 .. | 2502 24 .. |
| 1 x 42 W TC-TE | GX24q-4 | 2503 04 .. | 2503 14 .. | 2503 24 .. |

Supplied c/w lamps (4000 K)  
\* apart from exceptions

Coding:


replace the two dashes (--) by the corresponding figures: e.g. 2500 04 ..

- 00  no detection
- 21  DALI dimmable + switch dimming + standby warning
- 12  with Pro detection
- 14  with Pro detection + extinction warning
- 15  with Pro detection + standby warning
- 04  slave version + extinction warning
- 05  slave version + stand-by warning

## Additional options Rondo

Coding:

add the corresponding suffix to the product code: e.g. 2520 0400 ----

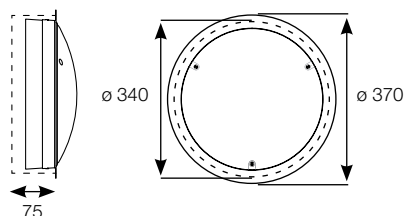

Flush-mounting dimensions:  
Rondo:  $\varnothing$  340 mm x 75 mm

- 9406 opal PC diffuser (for fluorescent version)
- 9501 Class 1 (for fluorescent version)
- 9702 stainless steel crosspoint screws (VK54)
- 9802 flush-mounting version



