


MIMIK 10 POST 600




Part number	304614
Lampholder:	LED
Light Source:	LED
Wattage:	10 W
Finish:	AN-96 / Anthracite gray / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK08 5J xx5
CRI:	80
Kelvin:	3000
Power factor:	$\cos\phi \geq 0,9$
Optic:	Asymmetric intensive reflector
Lightsource lumen output:	1006 lm
Luminaire lumen output:	745 lm
L:	L80
B:	B10
Lifetime:	60000 h
Ta MIN luminaire:	-20°
Ta MAX luminaire:	35°
ULR:	0%
IPEA* (Street Lighting):	B
IPEA* (Area Lighting):	B
IPEA* (Cycle/Pedestrian Lighting):	C
IPEA* (Green Areas):	C
IPEA* (Historical Areas):	A+
Luminous Intensity Class:	G*6

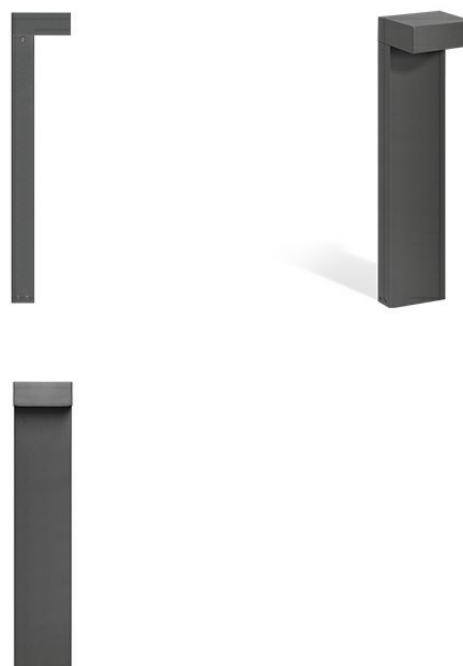


Description

- Landscaping LED bollard, comprising:
- Die-cast aluminium housing, powder-polyester coated ISO 9227
 - Tempered glass diffuser, screen-printed inside
 - Reflector in satin finish pure aluminium (Al 99.98)
 - Anti-ageing silicone gasket
 - Built-in driver
 - Stainless steel looking grains
 - Extruded aluminium pole powder-polyester coated ISO 9227
 - External electrical connection with IP-rated QUICK connector, complete with cable
 - Base plate included
 - Stainless steel locking screws
 - Glare control and upward light pollution laws compliant
 - Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Photometric data



Technical drawings



OPTIONAL ACCESSORIES

MIMIK 10 POST



310496

Connection Kit Y 3-way D.7-10.5mm

IP68