


MIMIK 10 POST 1000



Part number	306553
Lampholder:	LED
Light Source:	LED
Wattage:	10 W
Finish:	AN-96 / Anthracite gray / Textured
Insulation class:	I
Degree of protection:	IP65
IK-J-xxIP:	IK08 5J xx5
CRI:	70
Kelvin:	4000
Power factor:	$\text{COS}\phi \geq 0,9$
Optic:	Pedestrian and cycle reflector type 3
Lightsource lumen output:	1076 lm
Luminaire lumen output:	762 lm
L:	L80
B:	B10
Lifetime:	60000 h
Ta MIN luminaire:	-20°
Ta MAX luminaire:	35°
ULR:	0%
IPEA* (Street Lighting):	B
IPEA* (Area Lighting):	B
IPEA* (Cycle/Pedestrian Lighting):	B
IPEA* (Green Areas):	B
IPEA* (Historical Areas):	A+
Luminous Intensity Class:	G*3

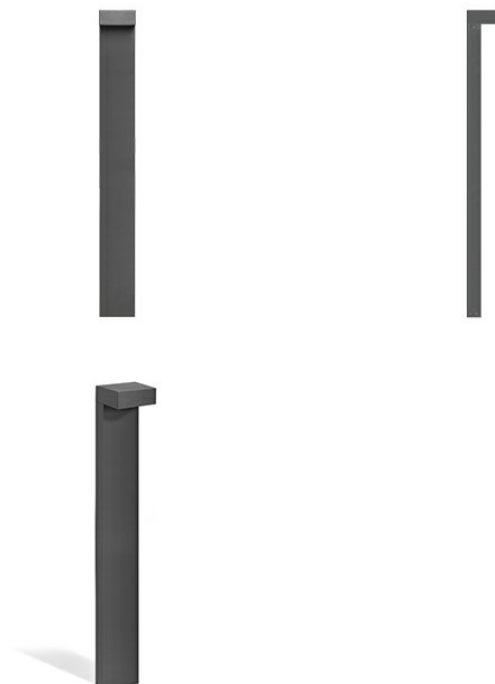


Description


Landscaping LED bollard, comprising:

- Die-cast aluminium housing, powder-polyester coated ISO 9227
- Tempered glass diffuser, screen-printed inside
- Reflector in satin finish aluminium (Al 99.98)
- Anti-ageing silicone gasket
- Built-in driver
- Stainless steel locking grains
- Stainless steel locking screws
- Extruded aluminium pole powder-polyester coated ISO 9227
- External electrical connection with IP-rated QUICK connector, complete with cable
- Base plate included
- Glare control and upward light pollution laws compliant
- Photometric data measure according to UNI EN 13032-4 and IES LM-79-08

Photometric data



Technical drawings



OPTIONAL ACCESSORIES

MIMIK 10 POST



310496

Connection Kit Y 3-way D.7-10.5mm

IP68