




η_{ef} (lm/W)
117



PARKLED


PARKLED

Park LED luminaires

Body:
Chassis CH400 for installation on post 60 mm

Optic:
opal sphere diameter 400 mm, PMMA

Application:
Park luminaire for illuminating parks, pedestrian zones, parking places...

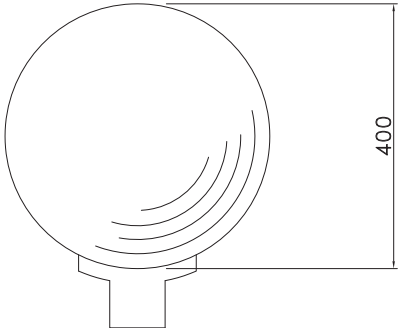

	W	lm	kg
PARKLED5000KO400	42	4 900	5

lm - luminaire light output

2200	2700	3000	4000	5700	6500	MIX	RGB	
×	×	○	●	○	○	×	×	×
●	×	×	×	×	×	×	×	●

● default ○ optional × not possible

