



ORION series

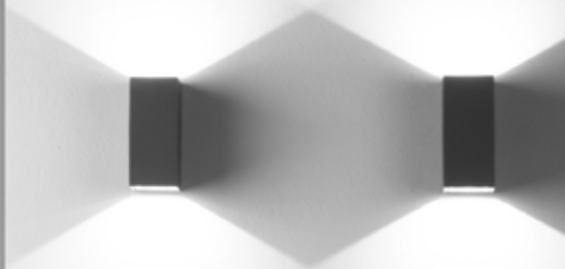

PERFORMANCE
 LIGHTING

ORION H



- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured


ORION H M

WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5,5 W	80	4000	A9/EW	742 lm	259 lm	70	10	35000 h	●	3105448
5,5 W	80	3000	A9/EW	675 lm	259 lm	70	10	35000 h	●	3105446
5,5 W	80	4000	A9/EW	742 lm	259 lm	70	10	35000 h	○	3105449
5,5 W	80	3000	A9/EW	675 lm	259 lm	70	10	35000 h	○	3105447



ORION H B

WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
10 W	80	4000	A40/W	1485 lm	501 lm	70	10	35000 h	●	3105452
10 W	80	3000	A40/W	1350 lm	501 lm	70	10	35000 h	●	3105450
10 W	80	4000	A40/W	1485 lm	501 lm	70	10	35000 h	○	3105453
10 W	80	3000	A40/W	1350 lm	501 lm	70	10	35000 h	○	3105451




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
ORION H		
Carter ORION H	●	3106290
Carter ORION H	○	3106289
Carter ORION H	●	3106291



3106290 3106289 3106291

ORION V

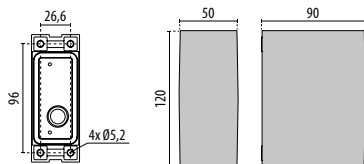

- AN-96 / Anthracite gray / Textured
- WH-87 / White / Textured

ORION V M

IK06 1J xx3

WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5,5 W	80	4000	S/EW	742 lm	409 lm	70	10	35000 h	●	3105440
5,5 W	80	3000	S/EW	675 lm	409 lm	70	10	35000 h	●	3105438
5,5 W	80	4000	S/EW	742 lm	409 lm	70	10	35000 h	○	3105441
5,5 W	80	3000	S/EW	675 lm	409 lm	70	10	35000 h	○	3105439



ORION V B


IK06 1J xx3

WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
11 W	80	4000	S/EW	1484 lm	800 lm	70	10	35000 h	●	3105444
11 W	80	3000	S/EW	1350 lm	800 lm	70	10	35000 h	●	3105442
11 W	80	4000	S/EW	1484 lm	800 lm	70	10	35000 h	○	3105445
11 W	80	3000	S/EW	1350 lm	800 lm	70	10	35000 h	○	3105443




OPTIONAL ACCESSORIES

DESCRIPTION	COLOR	PART NUMBER
ORION V		
Carter ORION V	●	3106287
Carter ORION V	○	3106286
Carter ORION V	●	3106288



3106287 3106286 3106288

ORION POST




● AN-96 / Anthracite gray / Textured

ORION POST 260

IK06 1J xx3




WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5,5 W	80	4000	S/EW	742 lm	409 lm	70	10	35000 h	● 3106842	
5,5 W	80	3000	S/EW	675 lm	409 lm	70	10	35000 h	● 3106841	




ORION POST 600

IK06 1J xx3

WATTAGE	CRI	KELVIN	OPTIC	LIGHTSOURCE LUMEN OUTPUT	LUMINAIRE LUMEN OUTPUT	L	B	LIFETIME	COLOUR/ RAL	PART NUMBER
Power LED 220-240 V 50/60 Hz										
5,5 W	80	4000	S/EW	742 lm	409 lm	70	10	35000 h	● 3106293	
5,5 W	80	3000	S/EW	675 lm	409 lm	70	10	35000 h	● 3106292	



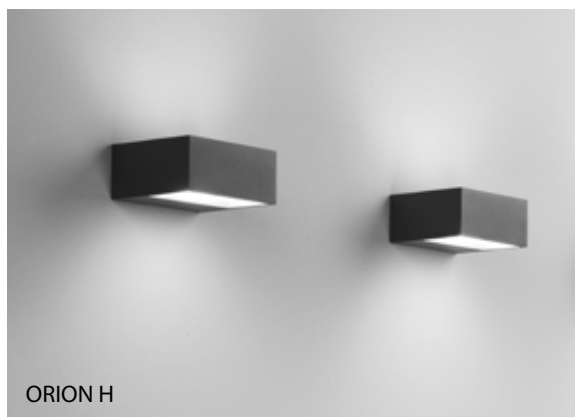

Discover more

CEILING MOUNTED

QUASAR



QUASAR 10
CEILING




QUASAR 30
CEILING

MIMIK



MIMIK 10
CEILING



NEW

MIMIK 20
CEILING

WALL MOUNTED

LANTERNA NK 21/27



NEW



NEW

LANTERNA NK 21 LANTERNA NK 27

QUASAR



QUASAR 10



QUASAR 20



QUASAR 30




QUASAR 60

MASK+



NEW



NEW

MASK+ MINI

MASK+

POLO+



POLO+ ZERO



POLO+ 1



POLO+ 2



POLO+ 3

MIMIK



MIMIK 10



MIMIK 10
FLAT



MIMIK 20



MIMIK 20
FLAT



MIMIK 30



MIMIK 30
FLAT

FLOODLIGHT

FOCUS+



FOCUS+ ZERO KIT



FOCUS+ ZERO



FOCUS+ 1



FOCUS+ 2



FOCUS+ 3

RECESSED WALL

INSERT+



INSERT+ ZERO



INSERT+ ZERO
CLIP



INSERT+ 1



INSERT+ 1
MARINE



INSERT+ 2



INSERT+ 3

BOLLARD

MIMIK



MIMIK 10
POST 300



MIMIK 10
POST 600



MIMIK 10
POST 1000

PADO



PADO 600



PADO 900



PADO 1200



PADO
PADO BASIC

STILO+ BASIC



STILO+
BASIC MINI



STILO+
BASIC MIDI

PERFORMANCE **iN** LIGHTING

The data contained in this brochure is for reference purposes only and does not involve any commitment by Performance iN Lighting S.p.A., which reserves the right to make all necessary changes without prior notice. Partial or complete reproduction of this brochure is forbidden.



PERFORMANCE iN LIGHTING S.p.A.

Viale del Lavoro 9/11

37030 Colognola ai Colli (VR) - Italia

Ph +39 045 61 59 211

Fax +39 045 61 59 292

www.performanceinlighting.com

