

LED CORN LAMPS
LCS28PLUS



19W




24W




Long Life 10 years OK, Enclosed OK, 100-277AC 50-60Hz, PF ≥0.9, CRI ≥80, IP64, 5 years warranty, LED LG 5630, IES, UL LISTED (LED LAMP) E384363, CLASSIFIED UL US E484357, LM80, LM79

S28PLUS-19W-04

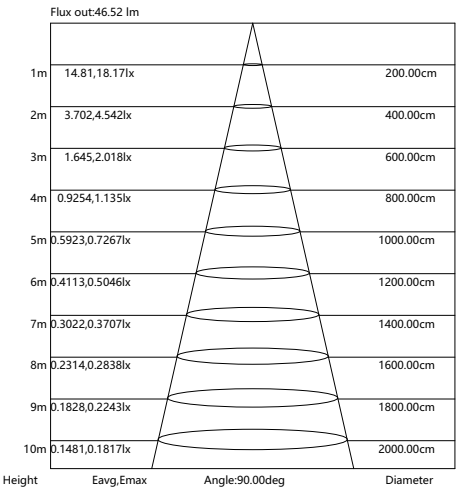

S28PLUS-24W-04

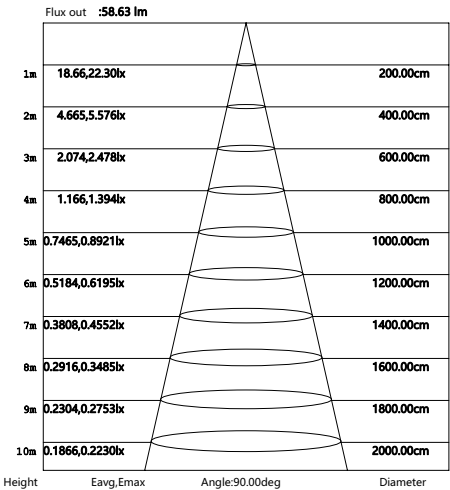

Specifications

Power	led Qty	PF	CRI	Voltage	CCT	Lumen	Size mm (x 0.039=inch)	Operation tep (°C/°F)	Weight (lbs=kg/2.2)	Certificate	Equal to
19W	56 leds LG5630	≥0.9	≥80	100-277VAC	2700-6000K	1900±200lm	E26 Φ64*174 E27 Φ64*175 E39 Φ64*185 E40 Φ64*190	minus 39~60°C	NW 0.34kg	UL/DLC	75W CFL MHL
								minus 39~140°F	GW 0.39kg		
24W	64 leds LG5630	≥0.9	≥80	100-277VAC	2700-6000K	2400±200lm	E26 Φ64*186 E27 Φ64*187 E39 Φ64*197 E40 Φ64*202	minus 39~60°C	NW 0.36kg	UL/DLC	100W CFL MHL
								minus 39~140°F	GW 0.41kg		


Features



REPLACE



LG 5630
100lm/W



180°beam angle



Flame retardant
material



IP64
waterproof design



Advantages



logo

ODM
OEM

OEM yourself special company logo



Rubycon

Use top brand capacitors Rubycon



IP64

IP 64 design.Driver is fully sealed with thermal paste,
working temperature -40~60°C(-40~140°F)

LED
0.3W 5630


0.3W 5630 SMD LED. 30mA each.only 26mA goes through each
LED so that LED lite time is maintained




No Fan heat dissipation solution



Guide-flow cove & hole.It guides water flow away very fast.
prevent from watered.



Isolated driver,better for heat
dissipation



Easy replacement with slide
connector from lamp body to
driver.




High quality driver components:
Rubycon capacitor (Japan);
FIRST MOS(USA); MPS IC Chip
(USA); Galaxy Diodes (biggest in
China)



Driver with heat sink silicone for
waterproof, dust proof and anti-
mosquitoes

Application




Acorn




Ball



Post top



Installation

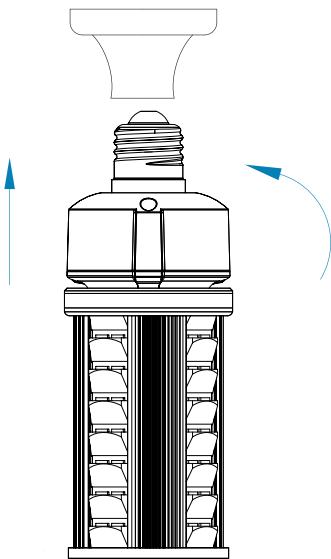

Step:1

Shown as Figure 1
Turn off the power before installation.




Remove the old ballast, capacitor and ignitor(if existing)

Step:2

Shown as Figure 2
Make sure the Alternating Current Wires connect to the E26 or E39 socket directly. (Reattach or replace ground lead if one is needed)


Step:3

Shown as Figure 3
Screw the LED lamp onto the corresponding socket.

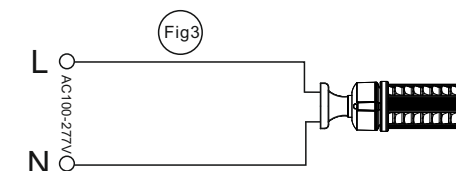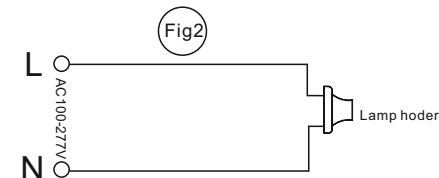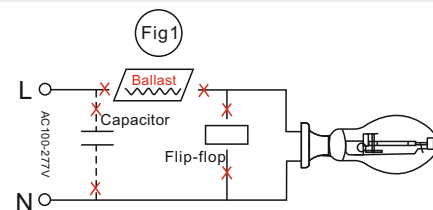

Packing

Wattage	Inner box size	N.W per lamp	G.W per box (lbs=KG/2.2)	G.W per carton (lbs=KG/2.2)	Carton Size	Quantity per Carton
19W	70x70x210mm	0.34kg	0.39kg	6.78kg	300x295x230mm	16PCS
24W	70x70x222mm	0.36kg	0.41kg	7.12kg	300x295x242mm	

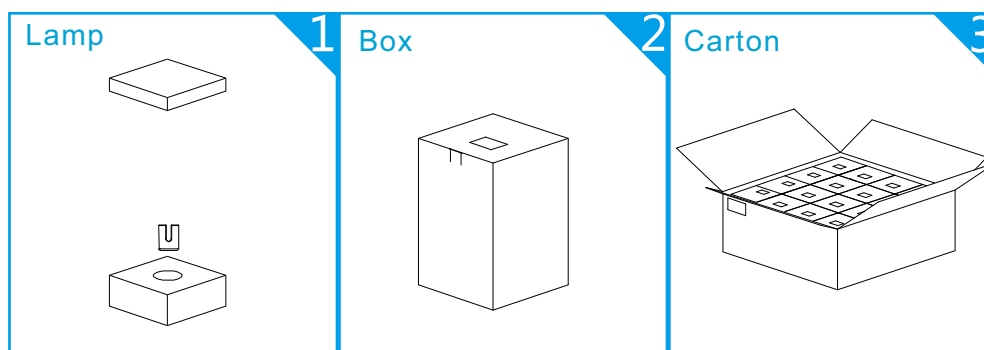

Pack Quantity:
16PCS



CAUTIONS

- Risk of electric shock. Do not use where directly exposed to water.
- All these 27W,36W,45W,54W led lamps are suitable for use in totally enclosed luminaires.
- These led corn bulbs are non-dimmable.
- Don't take apart the lamps without our permit.
- Please read the manual carefully before installation.

LEDICON FINLAND OY
Keilaranta 1, 02150 Espoo
www.ledvalotukku.fi
asiakaspalvelu@ledvalotukku.fi