




GE
Lighting

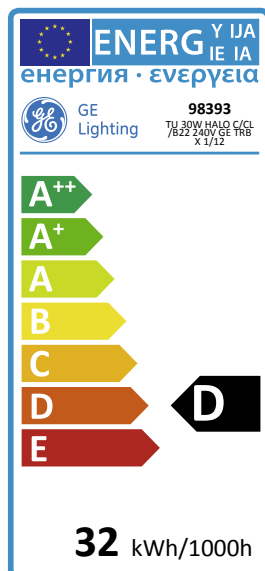

32
kWh/1000h

D
energy class

14
lumens/watt

Candle

TU 30W HALO C/CL/B22 240V GE TRBX
1/12

98393

Product information

GE's HaloCandle range is a direct replacement for regular incandescent lamps offering a crisp white light. These bulbs are the environmentally friendly solution for those who prefer the features and light quality associated with incandescent bulbs.

- Last twice as long and consume up to 30% less electricity than corresponding incandescent lamps.
- Provide instant-on, full light output at start-up and lumens are maintained throughout the life of the product.
- Unlike some compact fluorescent products, these lamps are 100% retrofit with the incandescent lamps they replace.
- Can be used with dimming switches.
- Environmentally friendly with no lead or mercury.
- Up to 2,000 hours life
- Excellent colour rendering, light close to natural (100% CRI)



- More than 90% lumen maintenance over life

Application areas



Hospitality



Home

Product data

| | |
|-----------------------------|-----------------------|
| Product Code | 98393 |
| Bulb Shape | Candle |
| Bulb Diameter [mm] | 35 |
| Maximum Overall Length [mm] | 95.5 |
| Net weight per piece [g] | 18 |
| Gross weight per piece [g] | 34 |
| Brand | General Electric (GE) |
| Cap/Base | B22d |

Performance data

| | |
|---|-------|
| Weighted energy consumption [kWh/1000h] | 31.53 |
| Energy efficiency class (EEC) | D |
| Lamp Lumen Maintenance factor (2000 hours) | 80% |
| Rated Life [h] | 2000 |
| Nominal correlated colour temperature (CCT) [K] | 2800 |
| Nominal lumens [lm] | 405 |
| Colour Rendering Index (CRI) [Ra] | 100 |

Electrical data

| | |
|---|---------|
| Rated power [W] | 30.0 |
| Starting time (sec) | 0.0 s |
| Warm up time up to 60% of full light output | instant |
| Number of switching cycles | 8000 |
| Dimming Capability | Yes |
| Nominal power [W] | 30 |
| Nominal lamp voltage [V] | 240 |

Logistic data

| | |
|--------------------------|---------------------|
| DUN Code | 10043168983935 |
| EAN Code | 0043168983938 |
| Pack Quantity | 12 |
| Inner pack type | BOX |
| Outer pack type | TRAY OUTER |
| Layer quantity | 420 EUR, 600 UK |
| Layer quantity EUR | 420 |
| Layer quantity UK | 600 |
| Pallet quantity EUR (PC) | 3360 |
| Pallet quantity UK (PC) | 4800 |
| Outer case size | 78 x 218 x 105 (mm) |
| Product status | Available |

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Product family datasheet \(PDF\)](#)

[Halogen Lamps Spectrum Catalogue \(PDF\)](#)

[GLS, Candle, Spherical Lamps Data sheet \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Please note that the rated life of those lamps under this SKU number placed on the market on or before 31 August 2013 can be either 1,000 hours or 2,000 hours. The rated life of those lamps placed on the market on or after 1 September 2013 is exclusively 2,000 hours.