

GE TUNGSRAM™

Innovation is our heritage
EST. 1896



1100

kWh/1000h

C

energy class

76

lumens/watt

CSI/CID

CSI1000/PAR64/G38

88514


Product information

A range of discharge lamps from 400 to 1000W giving high lumen for a variety of specialist applications in single ended and PAR format.

Application areas



Other

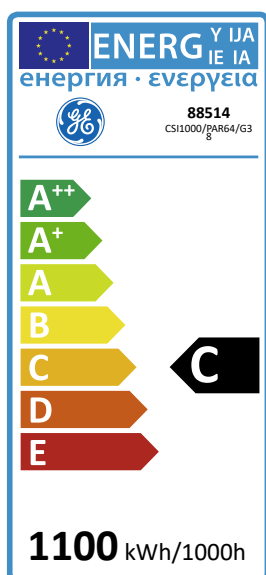

Product data

Product Code	88514
Bulb Shape	PAR
Bulb Finish	Clear
Bulb Diameter [mm]	204
Maximum Overall Length [mm]	175
Net weight per piece [g]	950
Gross weight per piece [g]	1420
Operating position	HOR - Horizontal
Brand	GE Lighting
Cap/Base	G38

Performance data

Nominal/ Rated Beam Angle [°]	6
Colour Code	838
Rated Lumens [lm]	38000
Weighted energy consumption [kWh/1000h]	1100.0
Useful lumens (at 90° cone) [lm]	38000
Energy efficiency class (EEC)	C
Nominal chromaticity coordinate X	0.42
Nominal chromaticity coordinate Y	0.41
Nominal correlated colour temperature (CCT) [K]	3800
Nominal lumens [lm]	76000
Colour Rendering Index (CRI) [Ra]	80

Electrical data

Rated power [W]	1000.0
Lamp Current [A]	14.7
Startup time [sec]	50
Dimming Capability	No
Ballast Required	Yes
Nominal power [W]	1000.0
Nominal lamp voltage [V]	80

Logistic data

DUN Code	10043168885147
Pack Quantity	1
Layer quantity	8 EUR, 12 UK
Layer quantity EUR	8
Layer quantity UK	12
Pallet quantity EUR (PC)	32
Pallet quantity UK (PC)	60
Outer case size	280 x 280 x 220 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[Entertainment Pocket brochure \(PDF\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.