

UNIQUE-T - 18 W - 26 W

Nominal wattage (W)	18		26	
Nominal length (mm)	99,5		113,5	
Width (mm)	41		41	
Tube diameter (mm)	13		13	
Weight (g)	69		78	
Colour Rendering Index CRI	≥ 80		≥ 80	
Temp. for max. luminous flux (°C)	25		25	
Light Colour	830	840	830	840
Correlated Colour Temp. CCT (K)	3000	4000	3000	4000
Nominal Luminous flux ¹⁾ @ 25 °C (lm)	1200	1200	1800	1800
Lamp efficacy ¹⁾ @ 25 °C (lm/W)	67	67	69	69
Energy Class	B	B	A	A
kW/1000 hrs	22,1	22,1	31,35	31,35

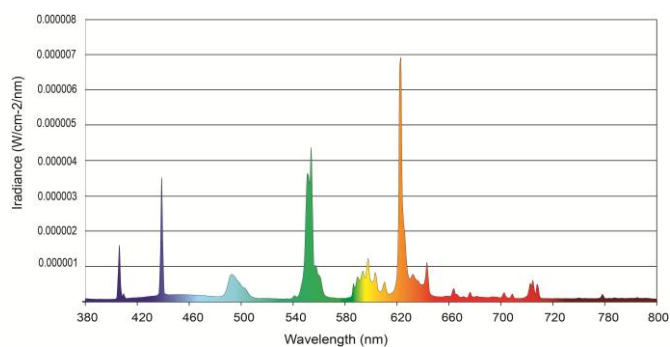
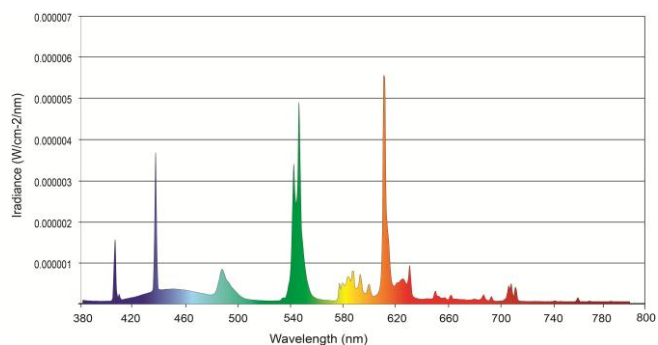
Electrical Data	Mag. ²⁾	Rated Wattage (W)	18	26
		Lamp voltage (V)	100	105
		Lamp current (A)	0.225	0.325

LLMF - Lamp Lumen Mainte. Factor - Mag	2,000 h	0,99
	4,000 h	0,97
	6,000 h	0,94
	8,000 h	0,9
	12,000 h	0,86
	16,000 h	0,85
	20,000 h	0,85
	24,000 h	0,85
LSF - Lamp Survival Factor - Mag	2,000 h	1
	4,000 h	1
	6,000 h	0,99
	8,000 h	0,99
	12,000 h	0,98
	16,000 h	0,96
	20,000 h	0,94
	24,000 h	0,9

Dimmable	No	
Cap	GX24d-2	GX24d-3
Mercury content (mg)	2,5	
IEC	60901	

Life time	Service life	Operation
Switching cycle		Magnetic
3 h (2 h 45 min on, 15 min off)		15,000 h
12 h (11 h on, 1 h off)	90 % survivals (12B10)	24,000 h
	average life time (12B50)	36,000 h

1) after 100 h
2) Magnetic Ballast

Spectral distribution 830

Spectral distribution 840


Packing data	18 W	26 W
Box size (mm)	385 x 200 x 135	400 x 200 x 160
Lamps per box (pcs)	50	50
Weight per box (kg)	3,8	4,3