

UNIQUE-T / E - 32 W - 57 W

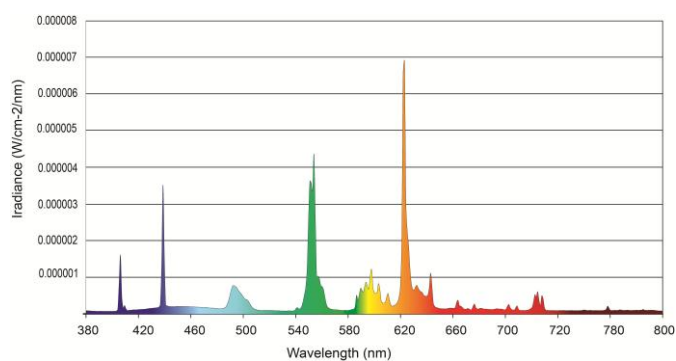
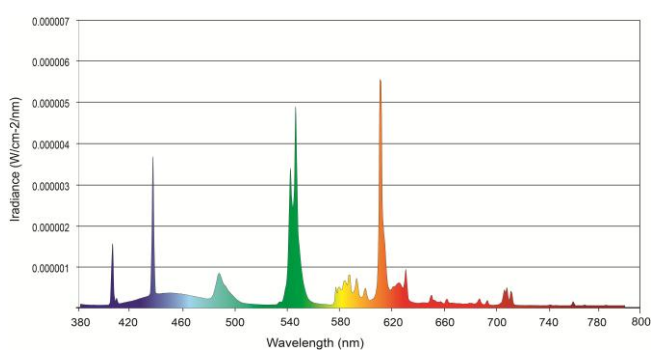
Nominal wattage (W)	32			42		57	
Nominal length (mm)	129			150		180,5	
Width (mm)	41			41		41	
Tube diameter (mm)	13			13		13	
Weight (g)	88			96		113	
Colour Rendering Index CRI	≥ 80			≥ 80		≥ 80	
Temp. for max. luminous flux (°C)	25			25		25	
Light Colour	827	830	840	830	840	830	840
Correlated Colour Temp. CCT (K)	2700	3000	4000	3000	4000	3000	4000
Nominal Luminous flux ¹⁾ @ 25 °C (lm)	2400	2400	2400	3200	3200	4300	4300
Lamp efficacy ¹⁾ @ 25 °C (lm/W)	75	75	75	76	76	75	75
Energy Class	A	A	A	A	A	A	A
kW/1000 hrs	35,2	35,2	35,2	46,2	46,2	62,7	62,7

Electrical Data Elect. ²⁾	Rated Wattage (W)	32	42	57
	Lamp voltage (V)	100	135	175
	Lamp current (A)	0.320	0.320	0.320

LLMF - Lamp Lumen Mainte. Factor - Elect	2,000 h	0,99
	4,000 h	0,97
	6,000 h	0,94
	8,000 h	0,9
	12,000 h	0,86
	16,000 h	0,85
	20,000 h	0,85
	24,000 h	0,85
	30,000 h	0,85
LSF - Lamp Survival Factor - Elect	2,000 h	1
	4,000 h	1
	6,000 h	1
	8,000 h	1
	12,000 h	0,99
	16,000 h	0,98
	20,000 h	0,97
	24,000 h	0,97
	30,000 h	0,9

Dimmable	Yes		
Cap	GX24q-3	GX24q-4	GX24q-5
Mercury content (mg)	2,5	3	3
IEC	60901		

Life time	Service life	Operation
Switching cycle		Electronic
3 h (2 h 45 min on, 15 min off)		24,000 h
12 h (11 h on, 1 h off)	90 % survivals (12B10)	30,000 h
	average life time (12B50)	42,000 h

Spectral distribution 830

Spectral distribution 840


Packing data	32 W	42 W	57 W
Box size (mm)	<i>n. av.</i>	<i>n. av.</i>	<i>n. av.</i>
Lamps per box (pcs)	50	50	50
Weight per box (kg)	4,8	5,3	6,2