


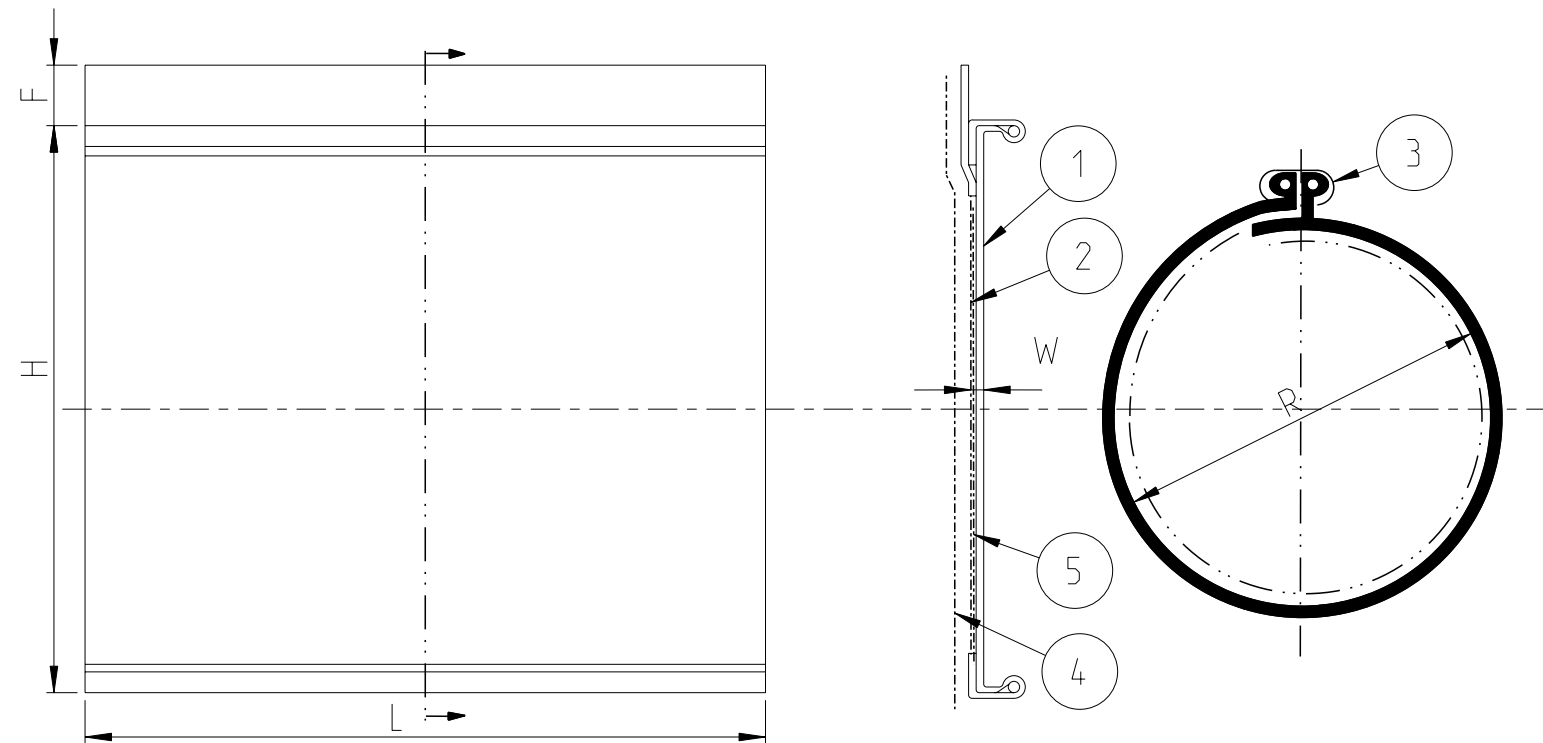

| REVISIONS |     |                 |           |     |      |
|-----------|-----|-----------------|-----------|-----|------|
| P         | LTR | DESCRIPTION     | DATE      | DWN | APVD |
|           | A   | INITIAL RELEASE | 26SEP2022 | JG  | NV   |
|           | B   | ECR-23-*        | 19JUN2023 | AN  | VR   |
|           |     |                 |           |     |      |
|           |     |                 |           |     |      |

## NOTES

1. DIMENSIONS IN mm. a = AS SUPPLIED,  
b = AFTER FREE RECOVERY
2. STANDARD LENGTHS L : 1000 mm, 1500 mm.  
OTHER CUT LENGTHS AVAILABLE UNDER REQUEST.
3. MAXIMUM LONGITUDINAL CHANGE AFTER FREE RECOVERY: -5%
4. STANDARD CUT LENGTH TOLERANCES:  
± 5 mm (L ≤ 500)  
± 10 mm (L < 1000)  
± 15 mm (L < 1500)  
± 1% (L > 1500)


5. STANDARD PRINTING: PRODUCT SIZE  
TE RAYCHEM CF5M + PRODUCT SIZE + BATCH NUMBER


| ITEM | DESCRIPTION               | MATERIAL                      |
|------|---------------------------|-------------------------------|
| 1    | HEATSHRINK SLEEVE         | CROSSLINKED POLYOLEFINE BASED |
| 2    | HOTMELT ADHESIVE          | POLYAMIDE BASED               |
| 3    | CLOSURE SYSTEM            | STAINLESS STEEL               |
| 4    | REMOVABLE PROTECTIVE FOIL | PE                            |
| 5    | WRAPPING FOIL             | ALUMINIUM                     |

| PRODUCT<br>SIZE | APPLICATION RANGE (mm) |     | Ha<br>MIN | Fa<br>MIN | W        |                                                                                                |
|-----------------|------------------------|-----|-----------|-----------|----------|------------------------------------------------------------------------------------------------|
|                 | MIN                    | MAX |           |           | a<br>MIN | b<br>MIN  |
| 45/8            | 8                      | 45  | 180       | 20        | 1.5      | 4.5                                                                                            |
| 55/12           | 12                     | 55  | 215       | 20        | 1.5      | 4.5                                                                                            |
| 84/15           | 15                     | 84  | 305       | 20        | 1.5      | 4.5                                                                                            |
| 100/25          | 25                     | 100 | 355       | 20        | 1.5      | 4.5                                                                                            |
| 125/30          | 30                     | 125 | 430       | 20        | 1.5      | 4.5                                                                                            |
| 146/34          | 34                     | 146 | 480       | 20        | 1.5      | 4.5                                                                                            |
| 165/42          | 42                     | 165 | 560       | 20        | 1.5      | 4.5                                                                                            |
| 205/50          | 50                     | 205 | 700       | 20        | 1.5      | 4.5                                                                                            |



PRODUCT SPEC - 108-160628

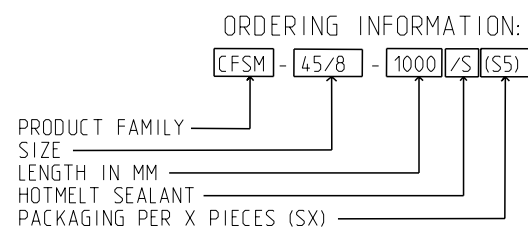

|                                                                                       |  |                                        |  |                                                                                                       |  |                                            |  |            |  |                   |  |       |  |    |  |     |  |
|---------------------------------------------------------------------------------------|--|----------------------------------------|--|-------------------------------------------------------------------------------------------------------|--|--------------------------------------------|--|------------|--|-------------------|--|-------|--|----|--|-----|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                                                |  | DWN 08NOV2022<br>J GODWIN              |  |  TE Connectivity |  |                                            |  |            |  |                   |  |       |  |    |  |     |  |
| DIMENSIONS:<br>mm                                                                     |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | CHK 08NOV2022<br>N VINEEL RAJAN                                                                       |  | NAME<br>CFSM REINFORCED WRAPAROUND SLEEVES |  |            |  |                   |  |       |  |    |  |     |  |
|  |  | APVD 08NOV2022<br>N VINEEL RAJAN       |  | PRODUCT SPEC<br>-                                                                                     |  |                                            |  |            |  |                   |  |       |  |    |  |     |  |
|                                                                                       |  | APPLICATION SPEC<br>-                  |  | SIZE                                                                                                  |  | CAGE CODE                                  |  | DRAWING NO |  | RESTRICTED TO     |  |       |  |    |  |     |  |
| MATERIAL<br>-<br>-                                                                    |  | FINISH<br>-<br>-                       |  | WEIGHT<br>-                                                                                           |  | A3                                         |  | 00779      |  | C=LV_CA_HS_CFSM-S |  | -     |  |    |  |     |  |
| CUSTOMER DRAWING                                                                      |  |                                        |  |                                                                                                       |  |                                            |  |            |  | SCALE             |  | SHEET |  | OF |  | REV |  |
|                                                                                       |  |                                        |  |                                                                                                       |  |                                            |  |            |  | 5:1               |  | 1     |  | 1  |  | B   |  |