

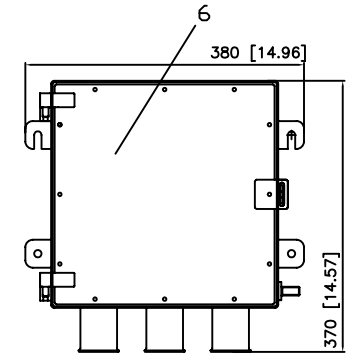
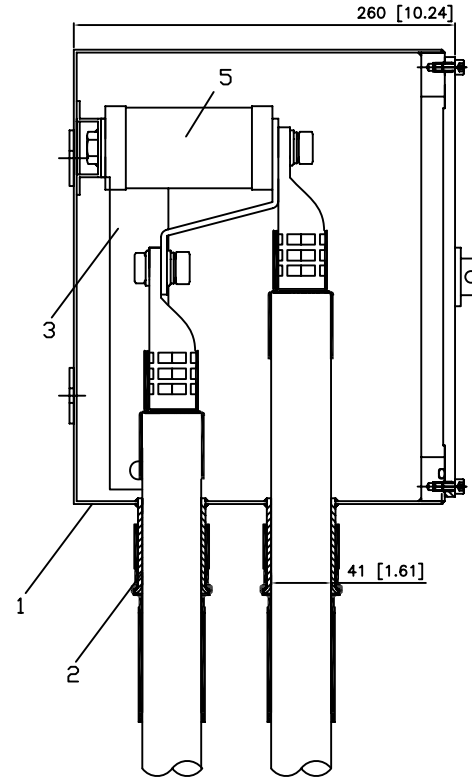


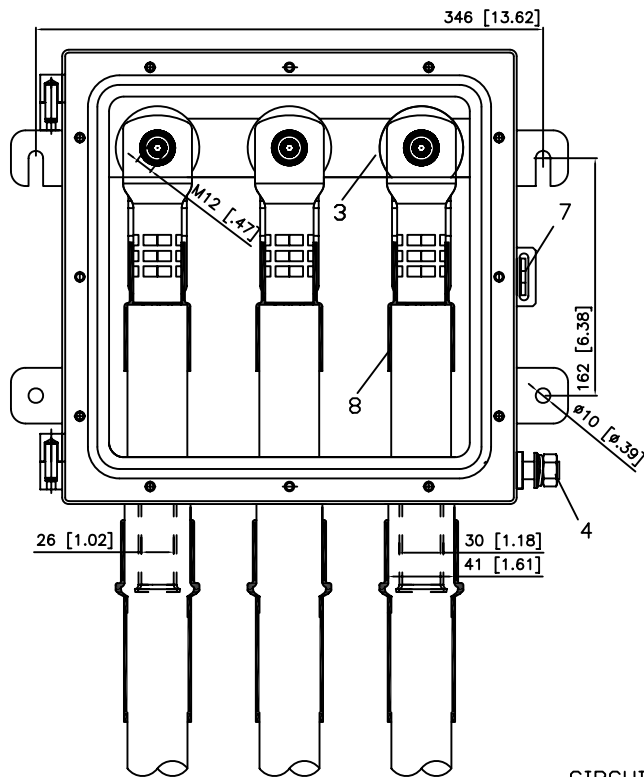

CIRCUIT DIAGRAM



Local
Earthing

PROTECTION CLASS IP68

Cable lugs not in scope of supply

CROSS BONDING LINK BOX FOR SINGLE CORES CABLES EPPA-055-X/3-XX-IP68			
8	SEALING SLEEVE	HEAT SHRINK TUBE	
7	PADLOCK FACILITY	STAINLESS STEEL	-
6	PROTECTION COVER	STAINLESS STEEL	-
5	SHEATH VOLTAGE LIMITERS (SVL)	ZnO	FOR 1kV UP TO 6kV
4	EARTHING POINT	-	M12
3	EARTHING BUSBAR	120mm ² COPPER	-
2	GLAND FOR BONDING CABLES	STAINLESS STEEL	diameter 25mm, 30mm or 41mm
1	LINK BOX HOUSING	2mm STAINLESS STEEL	-
No.	Description	Material	comments

P	LTR	REVISION RECORD	DATE	DWN	APVD

DIMENSIONS: mm [inches]

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

DWN THK		23.02.2009	MATERIAL		
CHK			 Tyco Electronics TYCO ELECTRONICS RAYCHEM GMBH OTTOBRUNN GERMANY		
APVD					
NAME OFFER DRAWING EPPA-055-X/3-XX-IP68 CROSS BONDING LINK BOX					
SCALE 1:5	SIZE A4	DRAWING NO EPD-204-618-00		SHEET 1 OF 1	REV 0