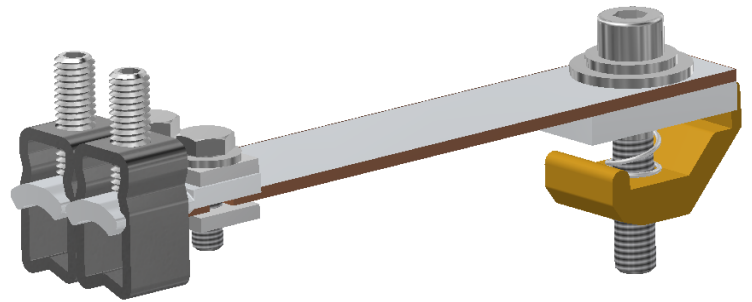


Tuotetiedot

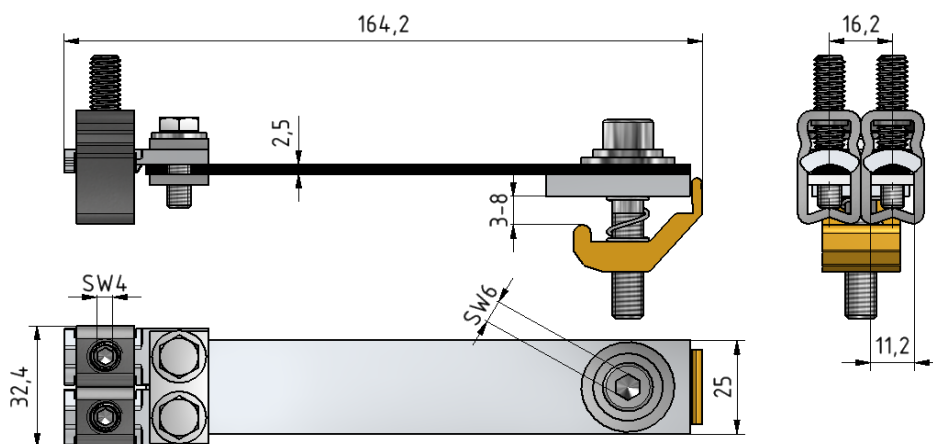
Tuotekoodi	VI01-0006	Sähkönumero	5408000	EAN-koodi	6410054080004
Tuotenimi	Joustava OL-PEN-liitin 2x70 mm ²				
Johtimet	2xAl/Cu 6-70 mm ²				

Tekniset tiedot

Nimellisvirta	Cu	270	A
	Al	270	A
Nimellisjännite		690	V
Max. Virta (US)	Cu	-	A
	Al	-	A
Max. Jännite (US)		-	V
Napaluku		1	
Max. Johdin koko		70	mm ²
Kiristysmomentti		5,6	Nm
Paino		307	g
IP-suojaus		-	
Standardit		-	
Väri/ Materiaali		Tina pinnattu kupari/ Teräs/ Messinki	
Kiinnitys/ Kytkenä		Ruuvi M8	


Kuvaus

Joustavaa PEN-liitintä käytetään vaativissa nolla- ja suojamaadoitus kohteissa/ kytkennöissä.

Mittakuva

Pakkaus

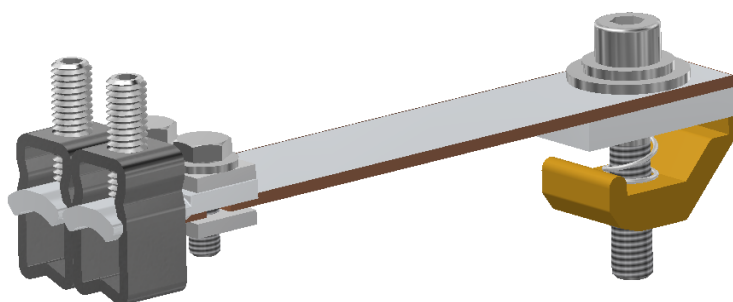
Pakkausmuoto	Laatikko	Kpl / Pakkaus	10	Paino [Kg]	3,10
Pituus [mm]	210	Leveys [mm]	155	Korkeus [mm]	105

Product data

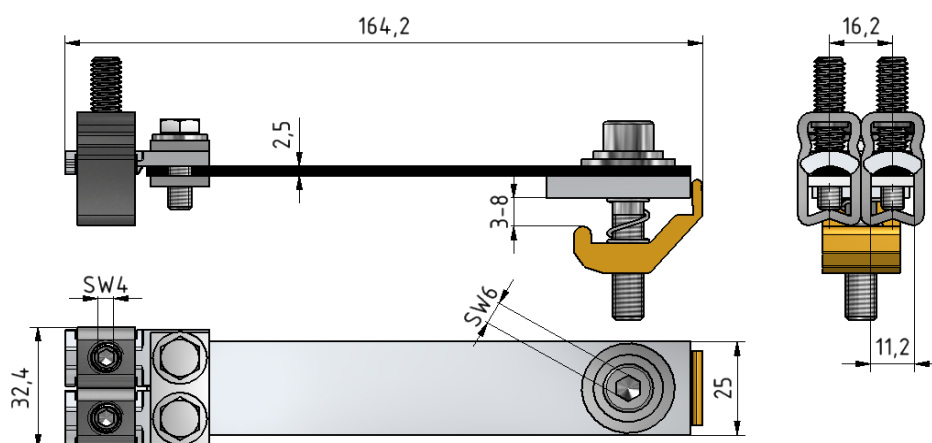
Product code	VI01-0006	STK-code	5408000	EAN-code	6410054080004
Product name	Flexible OL-PEN-connector 2x70 mm ²				
Wires	2xAl/Cu 6-70 mm ²				

Technical data

Nominal current	Cu	270	A
	Al	270	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	
Max. Cross section		70	mm ²
Tightening torque		5,6	Nm
Weight		307	g
IP-protection		-	
Standards		-	
Color/ Material		Tin plated copper/ Steel/ Ms	
Mounting/ Connection		Screw M8	


Description

Flexible PEN-connector is designed to be installed in busbar connecting N- and PE-conductors.

Drawing

Package

Package	Box	pcs/ package	10	Weight [Kg]	3,10
Length [mm]	210	Width [mm]	155	Height [mm]	105