



RD 8 ALMGSI HH R148M (840 008)

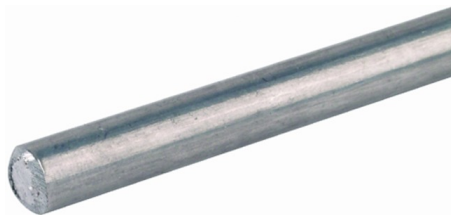


Figure without obligation

DEHNalu wire according to EN 62561-2, for use in lightning protection systems as air-termination, down conductor or equipotential bonding coconductor.

Al and AlMgSi must not be installed directly (without distance) on, in or under plaster, mortar or concrete, and not in soil.

Part No.	840 008
Diameter Ø conductor	8 mm
Cross-section	50 mm ²
Material	AlMgSi
Characteristics	semi-rigid
Standard	EN 62561-2
Specific conductance	≥ 27.77 m / Ohm mm ²
Specific resistance	≤ 0.036 Ohm mm ² / m
Weight	135 g
Customs tariff number	76052100
GTIN	4013364250840
PU	148 m

Note: Al and AlMgSi must not be installed directly (without distance) on, in, or under plaster, mortar or concrete, and not in soil.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

Conductor materials will be delivered in original coil weights only.

More conductor materials and components as specified in the standard series EN 62561-2 upon request.