




TP12

→ Insulating rescue stick

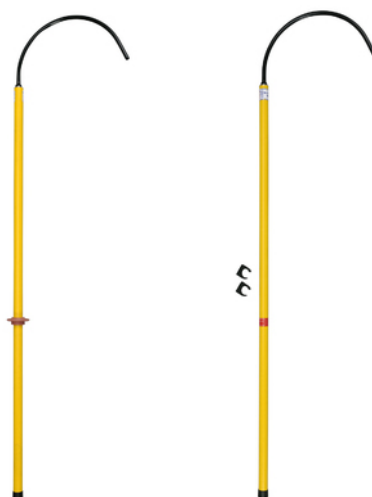

► USE

Stick for rescuing an injured technician (electrocution, dizziness...), working on category 1, 2 and 3 substations. It is used to grasp the injured person by the waist and bring him back to a protected area.

► SPECIFICATIONS

Test voltage on 300 mm : 100 kV.

Hook : steel tube 18 x 1,5 cm.

Length : 600 mm, delivered dismantled.

Ref. TP12X includes stick (Ref.TP12) with adaptor for voltage detector 5-36 kV (TDP536).

Reference	Description	Operating voltage	Overall length w/o hook (m)	Length of the protected area : shaft (mm)	Weight (kg)
TP12SC225	Rescue stick 225 kV without hook	225 kV	2,25	600	1.95
TP12 45KV	Rescue stick 45 kV with handguard and hook	45 kV	1,47	600	1,4
TP12 90KV	Rescue stick 90kV with handguard and hook	90 kV	1,97	600	1.7
TP12EC	Rescue stick 45 kV with hook and without handguard	45 kV	1,47	600	1,35

► TABLE LEGEND

TP12EC stick is delivered with wall brackets.

Document not contractually binding, errors and omissions excepted.