


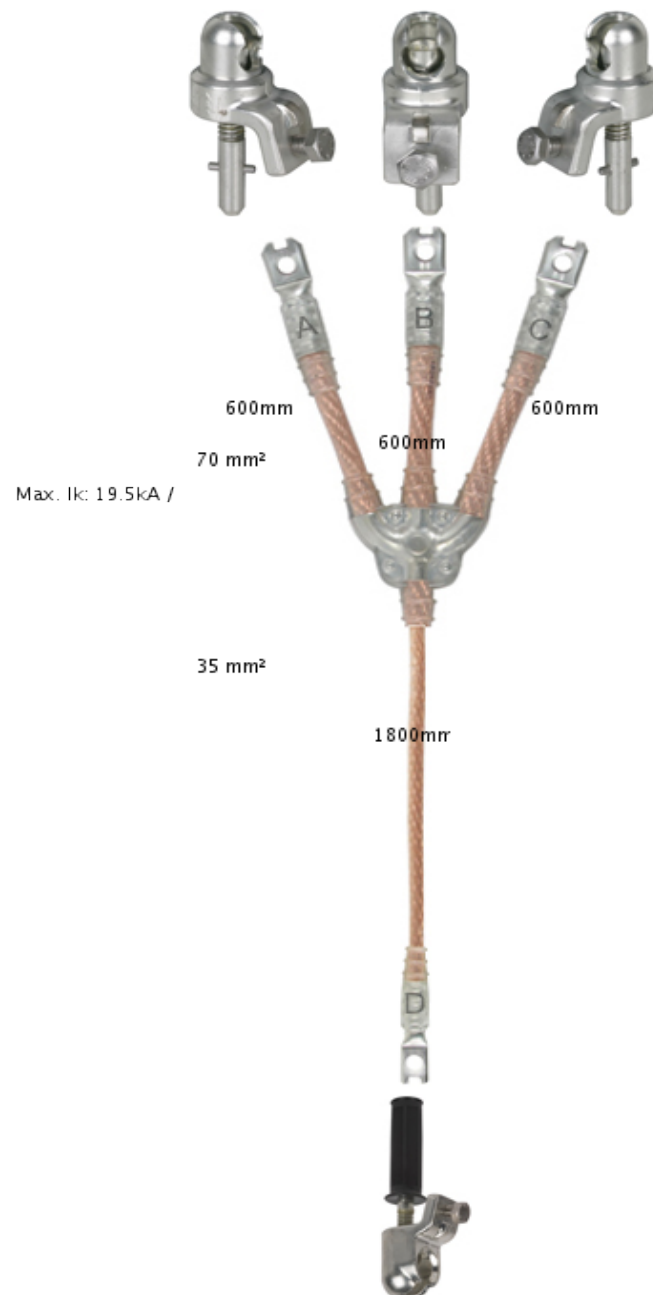

Result EaS Configurator DEHN + SÖHNE

Ordering information	Name	Description	Amount
Variant number VLGHLHM	EKV3+1 70 R	Three-pole earthing and short-circuiting device in accordance with EN/IEC 61230 (DIN VDE 0683 Part 100) cable cross-sections: 70 mm ² / 35 mm ² Max. short-circuit current / duration: 19.5 kA / 0.5 s - 2.5 Kind of material: Copper Length A: 600 mm Length B: 600 mm Length C: 600 mm Length D: 1800 mm	1
	KKH 20 D SQ	Adjustable ball head cap Ø20 mm, T pin shaft Part No. 772 331 Data Sheet Part No. 772 331 (Type KKH 20 D SQ)	
	KKH 20 HG	Rigid ball head cap Ø20 mm, with handle Part No. 772 313 Data Sheet Part No. 772 313 (Type KKH 20 HG)	

Note: Regrettably, we are unable to withdraw EaS devices. Please order accessories separately if necessary !

We reserve the right to modify design, technology, dimensions, weights and materials according to technical progress. Illustrations are non-binding. Pictures may differ from the modules described.