

KFP 20 M16 45 SSM (754 645)

- With threaded pin and self-locking nut



Figure without obligation

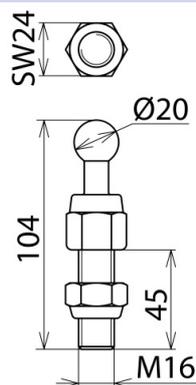


Figure without obligation

| Type | KFP 20 M16 45 SSM |
|---|---|
| Part No. | 754 645 |
| Fixed ball point Ø | 20 mm |
| Dimensions | M16 x 45 mm |
| Width A/F | 24 mm |
| Max. cable cross-section | 120 mm ² |
| Max. short-circuit current I _k 0.5 s | 33.5 kA |
| Max. short-circuit current I _k 1 s | 23.7 kA |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) and DIN 48088-1 |
| Material (fixed ball point) | E-Cu/gal Sn |
| Material (threaded pin) | StSt A2-70 |
| Hexagon nut | DIN 985-M16-8 / gal Zn |
| Tightening torque | 150 Nm |
| Weight | 287 g |
| Customs tariff number | 85389099 |
| GTIN | 4013364004238 |
| PU | 1 pc(s) |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.