

AH 300-M - HONDA GX 200/ GASOLINE 3000 rpm | 50 Hz

**MONOPHASE
230 V**

TECHNICALS SPECIFICATIONS



Image for guidance purposes.

Model:

AH 300

Gen set composed of engine and alternator perfectly assembled and fitted in a practical tubular chasis, that is adding great strenght and versatility.

STANDBY POWER:
(LTP "Limited Time Power" norma ISO 8528-1) **3 kVA**

Genset general characteristics

Standby power LTP (kVA)	3
Frequency (Hz)	50
R.p.m.	3000
Voltage (V)	230
(Cos ø)	1

ENGINE CHARACTERISTICS

MAKE	MODEL
HONDA	GX 200
Mechanical effect power (kWm)	3,3
No. cylinders	1
Diameter x stroke (mm)	68x54
Compresion ratio	8,5:1
Cooling system	Air
Series regulator	Mechanical
Start	Recoil Start
Fuel	Gasoline
Fuel tank capacity (L)	3,1
Fuel comsumption 100% (L/h)	1,5
Oil tank capacity (L)	0,6

AH 300-M - HONDA GX 200/ GASOLINE 3000 rpm | 50 Hz

**MONOPHASE
230 V**

ALTERNATOR CHARACTERISTICS


Voltage (V)	230
Frequency (Hz)	50
R.p.m.	3000
No. poles	2
Protection degree IP	21
Insulation	H

SOCKETS DESCRIPTION:

MONOPHASE version: 2 MONOPHASE SCHUKO SOCKETS 16A and termic protection.

DIMENSIONS AND WEIGHT

Lenght (mm)	740
Width (mm)	530
Height (mm)	530
Weight (kg)	72

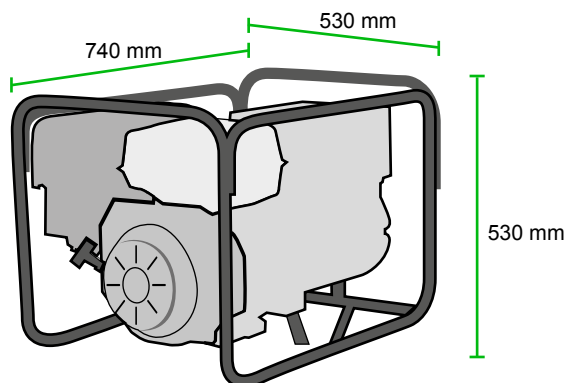

OPTIONAL

TRANSPORT KIT