

**PROMOTION**  
valid until 31.12.2020

**NEW**



# THE NEW CIMCUT'N'PRESS SERIES

## **CimCut'n'Press** – SIMPLY CUT & CRIMP SAFELY

Verifiable quality: a standard which makes the work carried out and a product for the customer more valuable. In electrical connection technology, the newest generation of battery-powered hydraulic units and cutting tools provides this safety – with the newest technology, best processing, reproducible operating times, and a longer tool life. The optimised dimensions and centres of gravity make work more comfortable, even in places that are difficult to access.

- Every device incl. 2 batteries – batteries compatible with the charging systems for the DeWalt XR series
- No annual service required
- Service cycle only after 20,000 activations
- Optimal lighting with LED function light
- USB interface for data analysis and control
- Incl. carrying case with space for 12 crimping inserts



Product video  
CimCut'n'Press series



Product brochure  
CimCut'n'Press series

**cimco**<sup>®</sup>  
W E R K Z E U G F A B R I K

**INCLUDING  
11 CRIMPING INSERTS!**



### PROMOTION SET 1


Hydraulic battery-operated crimping tool CimPress 300, up to 62 kN, up to 300 mm<sup>2</sup>, rod shaped, incl. 11 crimping inserts for "Standard design" tubular cable lugs and connectors, hexagonal crimping

Including the following crimping inserts:

16 mm<sup>2</sup>, 25 mm<sup>2</sup>, 35 mm<sup>2</sup>, 50 mm<sup>2</sup>, 70 mm<sup>2</sup>, 95 mm<sup>2</sup>,  
120 mm<sup>2</sup>, 150 mm<sup>2</sup>, 185 mm<sup>2</sup>, 240 mm<sup>2</sup>, 300 mm<sup>2</sup>

**CIMCO article no. 10 6848**

**INCLUDING  
11 CRIMPING INSERTS!**

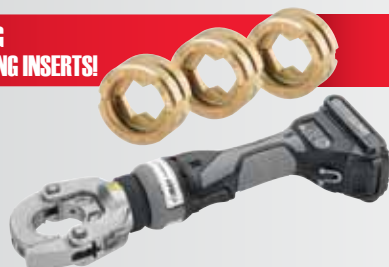

### PROMOTION SET 2


Hydraulic battery-operated crimping tool CimPress 300, up to 62 kN, up to 300 mm<sup>2</sup>, rod shaped, incl. 11 crimping inserts for "Standard design" tubular cable lugs and connectors, WM crimping

Including the following crimping inserts:

16 mm<sup>2</sup>, 25 mm<sup>2</sup>, 35 mm<sup>2</sup>, 50 mm<sup>2</sup>, 70 mm<sup>2</sup>, 95 mm<sup>2</sup>,  
120 mm<sup>2</sup>, 150 mm<sup>2</sup>, 185 mm<sup>2</sup>, 240 mm<sup>2</sup>, 300 mm<sup>2</sup>

**CIMCO article no. 10 6850**

**INCLUDING  
11 CRIMPING INSERTS!**

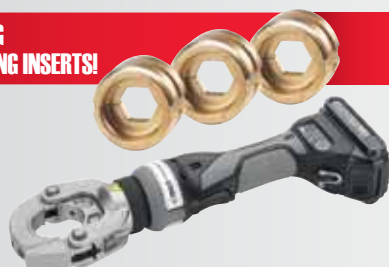

### PROMOTION SET 3

Hydraulic battery-operated crimping tool CimPress 300, up to 62 kN, up to 300 mm<sup>2</sup>, rod shaped, incl. 11 crimping inserts for compression cable lugs and connectors DIN 46235/46267, hexagonal crimping

Including the following crimping inserts:

16 mm<sup>2</sup>, 25 mm<sup>2</sup>, 35 mm<sup>2</sup>, 50 mm<sup>2</sup>, 70 mm<sup>2</sup>, 95 mm<sup>2</sup>,  
120 mm<sup>2</sup>, 150 mm<sup>2</sup>, 185 mm<sup>2</sup>, 240 mm<sup>2</sup>, 300 mm<sup>2</sup>

**CIMCO article no. 10 6852**

### 405-PIECE CONTENTS

Tubular cable lugs 6 – 50 mm<sup>2</sup> / SG cable lugs 25 – 50 mm<sup>2</sup>



### PROMOTION SET 4

Hydraulic battery-operated crimping tool CimPress 300, up to 62 kN, up to 300 mm<sup>2</sup>, rod shaped, incl. set of connecting material

Tubular cable lugs (R): 25 pcs.: 6 mm<sup>2</sup>–M6, 6 mm<sup>2</sup>–M8,  
10 mm<sup>2</sup>–M6, 10 mm<sup>2</sup>–M8, 16 mm<sup>2</sup>–M8, 16 mm<sup>2</sup>–M10,  
25 mm<sup>2</sup>–M8, 25 mm<sup>2</sup>–M10 // 20 pcs.: 35 mm<sup>2</sup>–M8,  
35 mm<sup>2</sup>–M10, 50 mm<sup>2</sup>–M10, 50 mm<sup>2</sup>–M12

Tubular cable lugs for switchgear connections (SG):

25 pcs.: 25 mm<sup>2</sup>–M6 // 20 pcs.: 35 mm<sup>2</sup>–M6,  
35 mm<sup>2</sup>–M8, 50 mm<sup>2</sup>–M6, 50 mm<sup>2</sup>–M8, 50 mm<sup>2</sup>–M10

**CIMCO article no. 10 6854**

**CIMCUT 25: MANUAL RETURN AFTER  
CUT COMPLETED!**



### PROMOTION SET 5

Hydraulic battery-operated cutter CimCut 25  
incl. universal cable sheath cutter (CIMCO article no. 12 0002)

Hydraulic battery-operated cutter CimCut 25, for cutting:

Steel cables up to ø 16 mm, Cu/Al cable up to ø 22 mm, Al solid up to ø 25 mm,  
Cu solid up to ø 22 mm, steel rods up to ø 14 mm, stainless steel cables up to ø 10 mm

Universal cable sheath cutter: to remove all layers of insulation  
from cables with a diameter of more than 25 mm, e.g. lead sheath,  
rubber, PE, PVC, incision depth adjustable from 0.5 - 5 mm,  
suitable for longitudinal and round cuts, blade interchangeable

**CIMCO article no. 10 6858**



ANDROID APP ON  
Google play

Download on the  
App Store



[www.cimco-international.com](http://www.cimco-international.com)

**cimco**<sup>®</sup>

W E R K Z E U G F A B R I K