

# EB0010 EB0020

## DETECTOR BASES FOR IRIS AND ENEA DETECTORS



### EB0010

Standard bases for the electrical connections of IRIS and ENEA detectors on closed-loop lines (max. 240 ENEA detectors per line) or conventional lines (max. 32 IRIS detectors). Complete with power supply and alarm contacts. Equipped with short-circuit plate which ensures continuity in the event of removal of the detector from the line.



### EB0020


Relay base with programmable relay base (contact NC and NO) controlled directly by the detector microprocessor. If combined with Enea series detectors, the activation logic can be defined independently for each relay base through the Inim programming software. The EB0020 base can be used to connect IRIS detectors to an intrusion control panel.



### Technical specifications

Base model	EB0010	EB0020
Contact type		Sliding contact
Fitting method		Bayonet coupling
Colour		White
Enclosure material		Polycarbonate
Supply voltage	/	from 10 to 30V $\overline{\text{ac}}$
Relay	/	1A, 30Vdc
Operating temperature	/	-5°C / +40°C
Dimensions	Ø 110mm h 24mm	
Weight	15g	

## DIMENSIONS

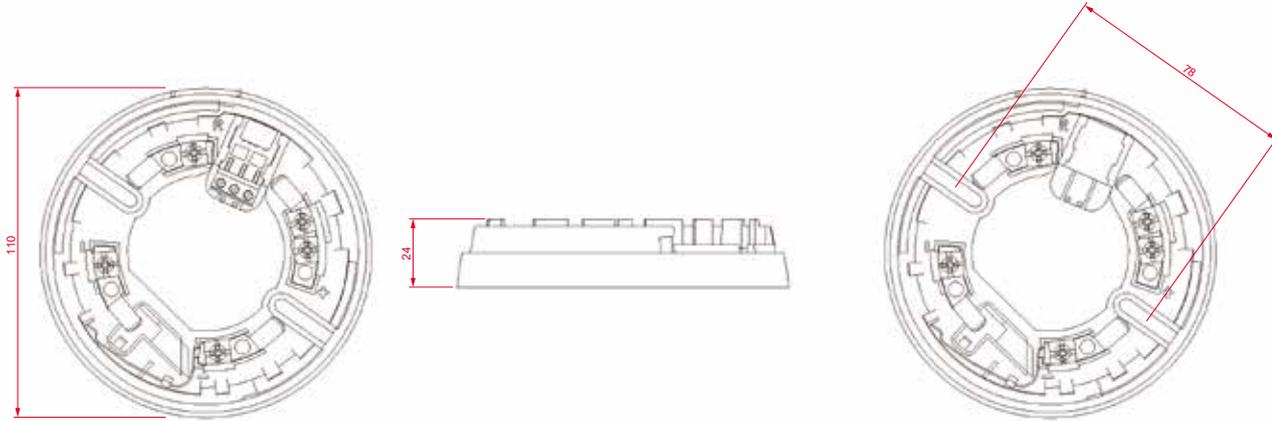

## WIRING DIAGRAMS TABLES

- ITD001** Enea Detectors Wiring Diagram
- ITD002** Iris Detectors Wiring Diagram
- ITD003** Enea Detectors Wiring Diagram
- ITI004** Enea and Iris Detectors Installation
- ITD007** ESB010 Sounder Base Wiring diagram
- ITD008** ESB020 Sounder Beacon Base Wiring diagram
- ITD009** EB020 Relay Base Wiring diagram

## ORDER CODES

- EB0010** Mounting base for ENEA and IRIS detectors
- EB0020** Relay base for ENEA and IRIS detectors
- EDX00** Self-addressing analogue detector
- IDX00** Conventional detector
- ESB010** Sounder base for attachment to EB0010 detector base
- ESB020** Sounderbeacon base for attachment to EB0010 base
- BDTB** Adaptor base for PG16 surface-mounted raceways
- FI100** Remote indicator