

Category 6A Shielded Feedthrough Plug

Our plugs are designed to simplify twisted pair terminations by allowing the wire pairs to be easily inserted through the plug and out of the front. This ease-of-use is now available for Category 6A terminations with this 'patch cord standard' plug.



Product code: PGSPDY2

Features

- Compliant with Category 6A patch cord standard.
- Each plug allows twisted pair wires to be inserted through the body and pulled out of the front to ensure the correct wiring order before crimping
- By pulling the cores into the plug, twists can easily be maintained up to the contacts, enabling fully rated category performance
- Able to accommodate Category 6A with overall cable O.D. up to 7.2mm
- Suitable for inner cores 23-24AWG with insulation 1.1 to 1.2mm O.D.
- Perfect solution for rapid termination; faults and failures minimised; less cable scrap and wastage
- Simple one piece design with no soldering required

Specifications

- Materials: Housing: Polycarbonate UL94V-0
- Shielding: Nickel-plated brass
- Gold plating: 1.27µm/50µ"
- 3 prong contact for solid or stranded cores
- Operating temperature: -10°C to 60°C

Packaging

Supplied in polybags of 10 then 100 then 500





CODE	SÄHKÖNUMERÖ	PACK QTY	DIMENSIONS	WEIGHT
PGSPDY2#10	72 058 78	10	112.3 x 65.5 x 11.9mm	20g

Commodity code: 85444920 **County of origin: Taiwan**

SPEEDY RJ45

Code: PGSPDY2

ROHS Compliant

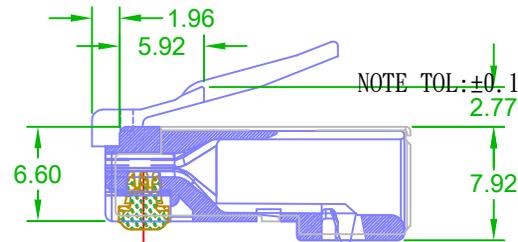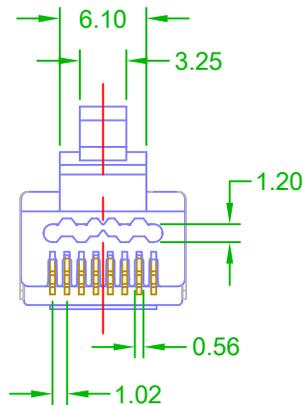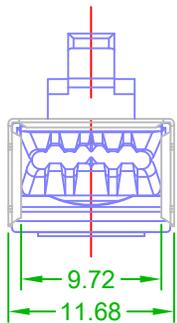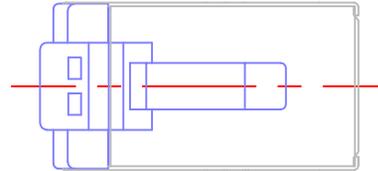

1. Housing material: Polycarbonate
Flammability rating: =UL 94V-0,RoHS Compliant.
2. Contacts type: Three prong pin fits solid/stranded wires
3. Gold plating: 1.27 μ m/50 μ "
4. Packaging quantity: PGSPDY2#10 = 10 pcs
PGSPDY2#100 = 100 pcs
PGSPDY2#500 = 500 pcs
5. Housing colour: Transparent
6. Shielded Material: Stainless Steel
7. Operating temperature: -10°C to 60°C

NOTE TOL: ±0.1



03/02/2021