


NPC+ (No Polish Connector) SC APC, FS, 250 μ m and 900 μ m

CORNING

Part Number:
NPCP-SCA-48

The NPC+ (No Polish Connector) eliminates field polishing, loose parts, and termination tools. The innovative buffer clamp design eliminates rework by delivering superior twist and transmission with applied load (TWAL) mechanical performance. After fiber preparation and cleaving, installation is a simple three-step process: insert fiber, actuate splice, activate the buffer clamp. Faster than fusion splicing, the NPC+ delivers savings in installation expense and reduces overall complexity of termination.

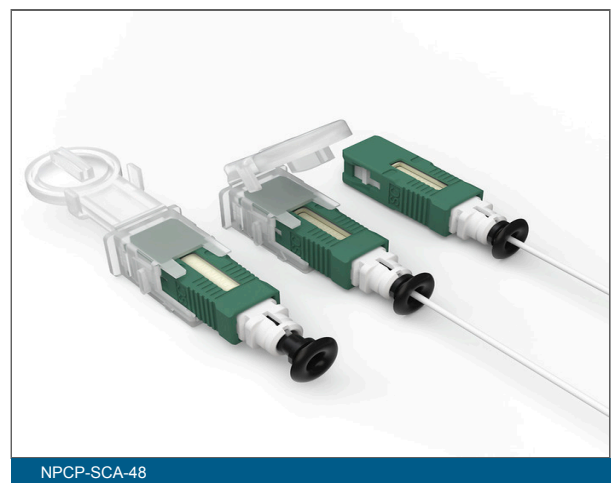

NPC+ (No Polish Connector) SC APC, FS, 250 µm and 900 µm

CORNING

Specifications

Mechanical Specifications - Connector

Nominal Fiber Outer Diameter	125 µm
Durability	≤ 0.2 dB change, 500 rematings, FOTP-21

Design - Connector

Connector Type	SC
Housing Color	Green
Housing Material	Composite
Ferrule Material	Zirconia

Environmental Conditions

Temperature Cycling Standard	≤ 0.3 dB IL, -40° to +75°C, 21 cycles
Temperature Range, Operation	-40 °C to 75 °C (-40 F to 167 F)
Temperature Range, Storage	-40 °C to 85 °C (-40 F to 185 F)

General Specifications

Fiber Category	Single-mode (OS2)
Product Type	Field-Installable Connectors
Technology	No-Epoxy/No-Polish

Optical Specifications - Connector

Polish	APC
Insertion Loss, Max.	0.6 dB
Insertion Loss, Typical	0.3 dB
Reflectance, Typical	< -55 dB

NPC+ (No Polish Connector) SC APC, FS, 250 µm and 900 µm

CORNING

Ordering Information

Product Number	NPCP-SCA-48
Package Contents	48 piece box (6 connectors packaged in plastic thermoformed containers, 8 containers per box). Minimum Order Quantity: 48 PCE
Units per Delivery	48/1

Standards

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
Approvals and Listings	In compliance with environmental and mechanical requirements of TIA/ EIA-568-D.3, GR-1081, Issue 1 section 4.3 yield, Insertion loss requirements of GR-1081-CORE, Issue 1 (GR-326-CORE, Issue 4) Thermal Cycle and Thermal Age; Back reflection performance was typical of an index gel-matched mechanical splice connector



Corning Optical Communications LLC • 4200 Corning Place • Charlotte, NC • 28216 • United States
800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified. © 2021 Corning Optical Communications. All rights reserved.