

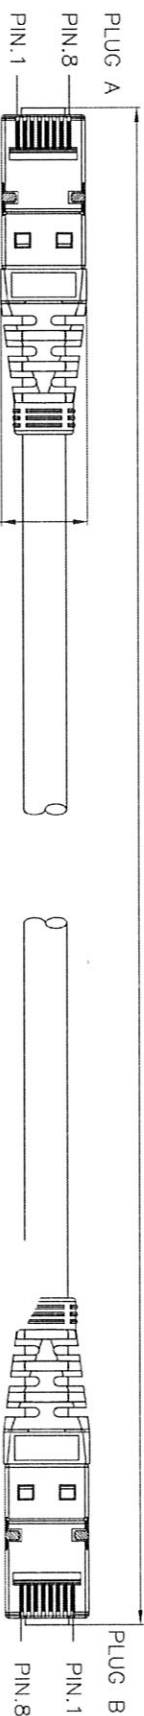


Total length (optional)



6.6±0.1
21.2±0.3
23.0±0.3
12.0±0.1

Print: LANET /FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A
LSOH

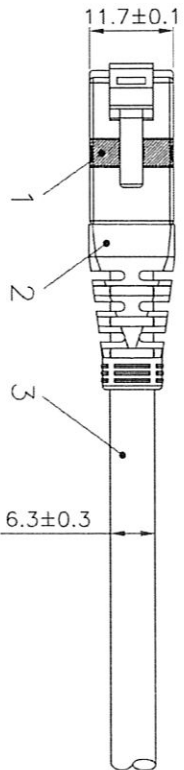

Remark :

XX059X XXX X
(1) (2) (3) (4)

- (1) XX : Jacket Color
01=Black(RAL9011), 02=Gray(RAL7035), 03=Red(RAL3031)
05=White(RAL9010), 06=Yellow(RAL1021), 07=Blue(RAL5015)
08=Green(RAL6029), 09=Orange(RAL2003), 10=Purple(RAL4005)
11=Pink(RAL4003)
(2) X : Wiring
1=1568A, 2=1568B, 3=1568A & 1568B combination
(3) XXX : Length
(4) Length Unit : 1=cm, 2=meter, 3=feet.
(3)(4) : 0501=0.5meter(50cm), 0012=1meter, 0102=10meter
0033=3feet, 0103=10feet

Specification :

Material :

1. RJ45 Plug :
1-1. Housing : Polycarbonate, UL 94V-2, Transparent color.
1-2. Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
1-3. Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
1-4. Shield : Bronze with Nickel plated.
2. Molding : PP-P0060GN Boot.
3. Cable :
3-1. Jacket : LSOH.
3-2. Conductor : 26 AWG stranded copper.
3-3. Isolation : PE.
3-4. Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
4. Cable structure : S/FTP, 4 twisted pair.

GENERAL DIMENSIONS	DRAWING	DATE	NAME	ITEM NO.:
XX.XXX ±0.005	CHECK	02.NOV.2010	LSY	
XX.XXX ±0.05	APPROVAL	02.NOV.2010	VINCENT	
XX.XXX ±0.1	SCALE	1/1 (A4)	UNIT	mm

TIETOSÄHKÖ OY
ESTABLISHED 1985

DES.: C6a S/FTP Patch Cord W/ SR type



DRAWING CLASSIFICATION

S SHEET 1 OF 1



1 2 3 4 5 6