




GGM CAT63MZHSB1

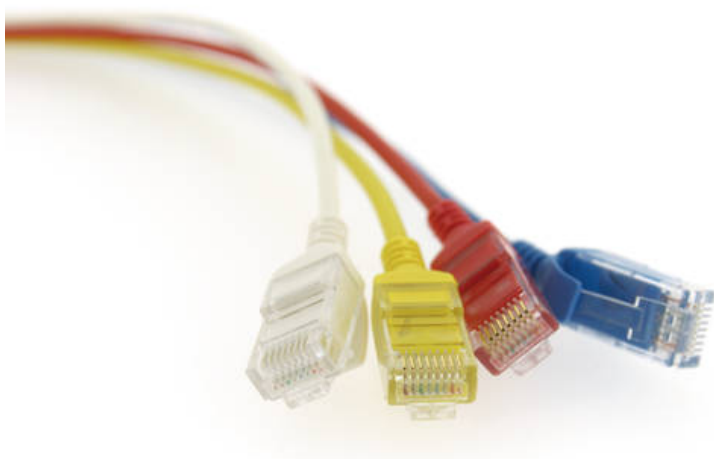

Our slim patch cord can improve space saving up to 50% from standard CAT6 UTP patch cord. It will improve airflow in racks but also avoid overcrowding patching.
Small diameter cable with high flexibility.

Other color available soon !

Specifications

- Category 6 U/UTP
- Standards :
 - ANSI/TIA-568-C.2,
 - EN 50173,
 - ISO/IEC 11801
- Applications :
 - IEEE 802.3 : 10Base-T ; 100Base-T ; 1000Base-T
 - IEEE 802.3at/af (PoE/PoE+)
- RJ45 UTP plug (50 μ)
- Cable OD: **3,1 mm**
- Frequency range: from 0 to 250 MHz
- Characteristic impedance: 100 Ω
- Outer jacket: LSZH (IEC 60332-1)
- Copper conductor
- AWG 30
- Slim boots