




## Pack of 12 SC OM3 50/125 $\mu$ m 2 m 12 colour coded pigtails

**GGM S4MPC2ML**

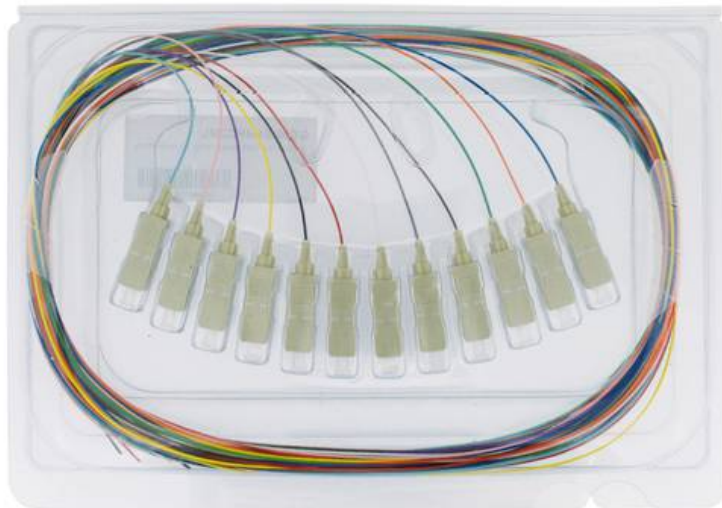

Pack of 12 OM3 50/125  $\mu$ m pigtails, IEC 60304 colour coded

- 12 coloured pigtails
- Tight buffer 900  $\mu$ m "Easy strip" jacket
- PC polishing
- Insertion loss (typical):  $\leq 0,15$  dB
- Return loss (typical):  $\geq 35$  dB
- Bandwidth (MHz/km) :
  - @ 850 nm :  $\geq 1500$
  - @ 1300 nm :  $\geq 500$
- Mating cycles : 1000 (variation 0,2 dB)
- Temperature range during operation: - 5 °C à + 60 °C
- Individual IL/RL test supplied with each item
- Unique serial number
- Connectors 100% compliant with IEC 61754 component standard