


DATASHEET

LC quad Adapter with Plastic housing

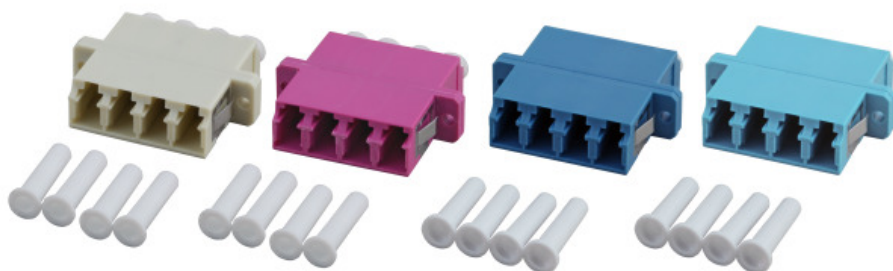

Description

LC Quad Adapter with Plastic Housing, breakout SC-duplex. with snap-in fixing.

General data

Type of connector connection 1	LC-quad
Type of connector connection 2	LC-quad
Design	SC-Duplex
Type of housing	With flange
Dust cover	yes
Accessories	Self-Tapping Screw

Mechanical characteristics

Housing material	plastic
Type of fastening	screw/lock
Sleeve material	ceramic

Dimensions

Length	27.6 mm
Width	34.8 mm
Height	9.2 mm

Environmental conditions

Operating Temperature	-40 – 75 °C
Storage temperature	-40 – 85 °C

Standards, approvals, certifications

Conform to Standard	IEC61754-20
---------------------	-------------

Available variants

Article no. Title	Colour	Suitable for type of fibre	Type	Insertion loss 1310nm	Insertion loss 850nm
-------------------	--------	----------------------------	------	-----------------------	----------------------


This datasheet was created automatically on 04-06-2020 . Technical changes reserved.



LC quad Adapter with Plastic housing

53335.1	Adapter LC Quad OM4 one piece, erica violet, ceramic sleeve, SC Duplex	erica-violet	Multimode	LC/PC		< 0,15 dB
53355.32	Adapter LC Quad OM3 one piece, aqua, ceramic sleeve, SC Duplex	aqua	Multimode	LC/PC		< 0,15 dB
53352.3V1	Adapter LC Quad OM1/2 one piece, beige, ceramic sleeve, SC Duplex	beige	Multimode	LC/PC		< 0,15 dB
53353.3	Adapter LC Quad SM one piece, blue, ceramic sleeve, SC Duplex	blue	Singlemode	LC/PC	< 0,15 dB	
53353.31	Adapter LC/APC Quad SM one piece, green, ceramic sleeve, SC Duplex	green	Singlemode	LC/APC	< 0,15 dB	

Technical drawings

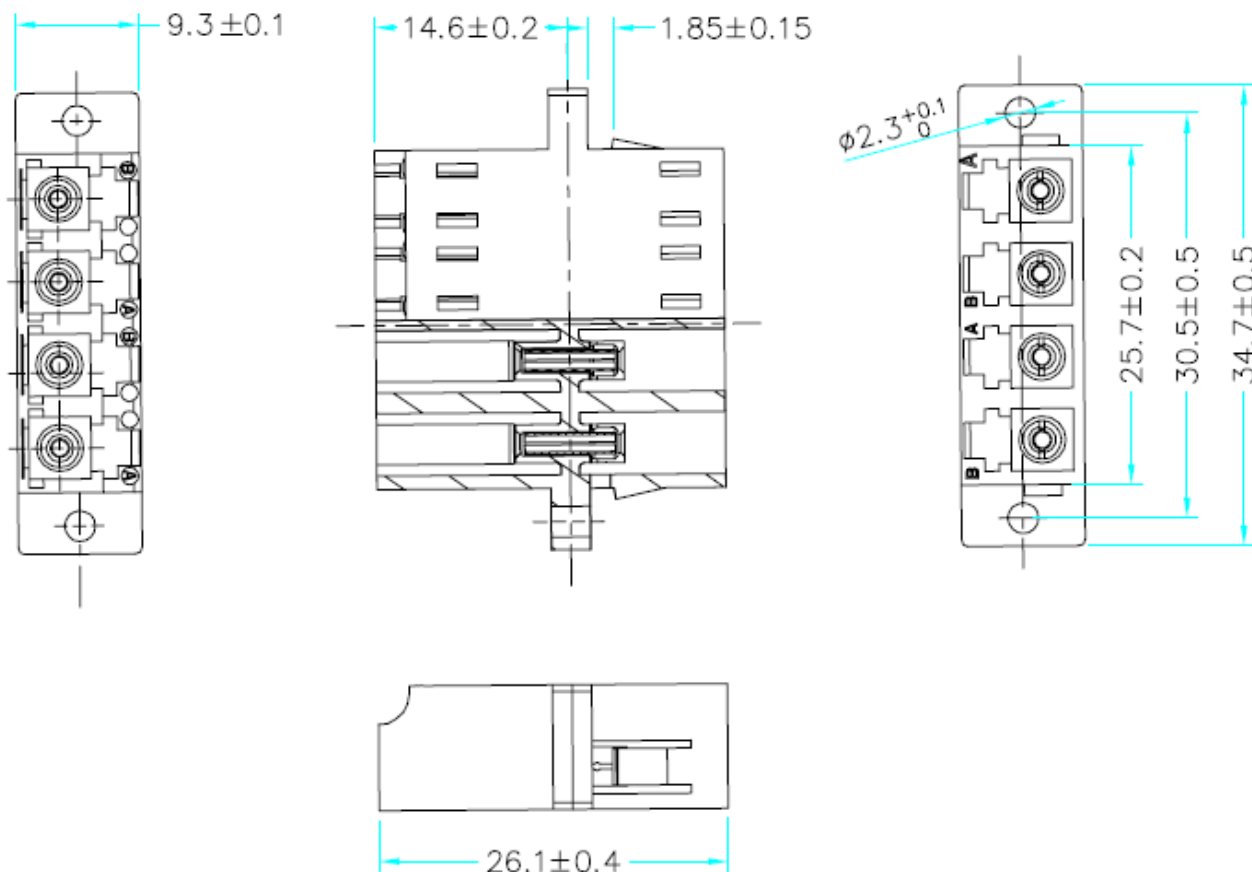

accessory

53215.1	Laser protection cover for SC Adapters
80550.1-50	Self-tapping screw

This datasheet was created automatically on 04-06-2020 . Technical changes reserved.