



General Description

2W Standard Load (DC~4000MHz, IP67, 4.3/10-male)


Features & Benefits

- Wide Frequency Band Covering DC-4000MHz
- Low Insertion Loss
- Low VSWR
- Indoor/Outdoor Using IP67

Electrical & Mechanical Specifications

Model No.	LAD DL 2 / 7402408
Freq(MHz)	DC-4000MHz
Return Loss(dB)	≥23.1
Impedance(Ω)	50
Power Rating(W)	2W (average Per Port)
Impedance	50 ohm
Connector	4.3/10-male 1500.00
RF Operating Voltage,Max(vrms)	V 2000 V
DC Test Voltage	0.40 mOhm
Outer Contact Resistance, maximum	1.50 mOhm 10000
Inner Contact Resistance, maximum	MOhm
Insulation Resistance, minimum	
Operating Temperature(°C)	-40~+85
Outer Contact Plating	Tri-metal
Inner Contact Plating	Silver
Attachment Durability	25 cycles
Interface Durability	500 cycles
Insertion Force	66.72 N 15.00 lbf
Weight(kg)	0.13

Mechanical Drawing

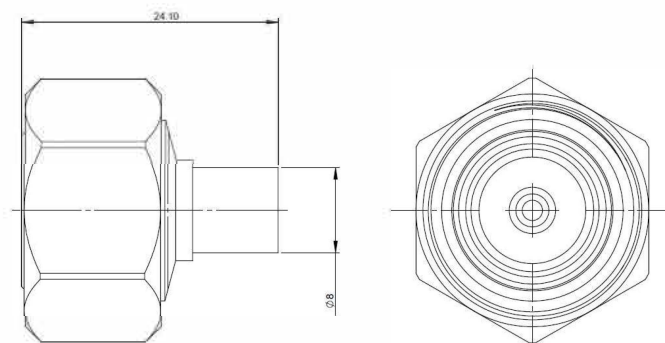

Dimensions in mm