


# Product Specification

LAD 4310M-7/8" / 7402471



LAATUANTENNI OY

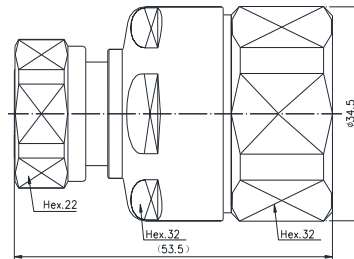

4.3-10 Straight male Connector for 7/8"  
Flexible RF Cable

\*The above picture is only for reference, we may change the appearance design in order to enhance performance without notification.

## Material and Plating

Inner Conductor	Brass / Silver Plating
Body & Outer Conductor	Brass / Trimetal Plating
Insulator	PTFE/TPX
Gasket	Silicon Rubber
Nut	Brass / Trimetal Plating

## Electrical Specifications

Characteristics Impedance		50 Ohm
Frequency Range		DC~6GHz
Insulation Resistance		≥5000MΩ
Dielectric Withstanding Voltage		2500V rms
Operating Voltage		1400V rms
Center contact resistance		≤1.0mΩ
Outer contact resistance		≤0.6 mΩ
Insertion Loss	@DC-2.7 GHz	≤0.10dB
VSWR	@0.8-1.0 GHz	≤1.08
	@1.7-2.7 GHz	≤1.10
PIM3(2*43dBm)	@1800MHz	≤-160dBc

## Environmental & Mechanical Specifications

Durability (matings)	≥500 cycles
Mechanical Shock Test Method	MIL-STD-202, Method 213, Test Condition D
Vibration Test Method	MIL-STD-202, Meth. 204, Cond. A
Temperature Range	-65°C to +85°C
RoHS	Compliant
Sealing Class	IP68 24hr, 1m, 20°C

## Regulatory Compliance / Certification

ISO 9001:2015	Compliant
---------------	-----------

The facts and figures contained herein are carefully complied to the best of our knowledge, but they are intended for general informational purposes only.