


WI-PS306GF-UPS 5GE+1SFP Ports 24-48V UPS No-Break PoE Switch with 5-Port PoE Data sheet

Highlights


- 5GE+1SFP Full Gigabit Switch with 5 PoE ports
- Inside solar controller and battery controller for charge and dis-charge battery circulatory from solar Panel and DC INPUT
- 24-48V PoE output suit for work with wireless AP and Camera at same time
- 60W high output power PoE port make it compatible to speed dome camera
- Small size design for outdoor CCTV system waterproof box



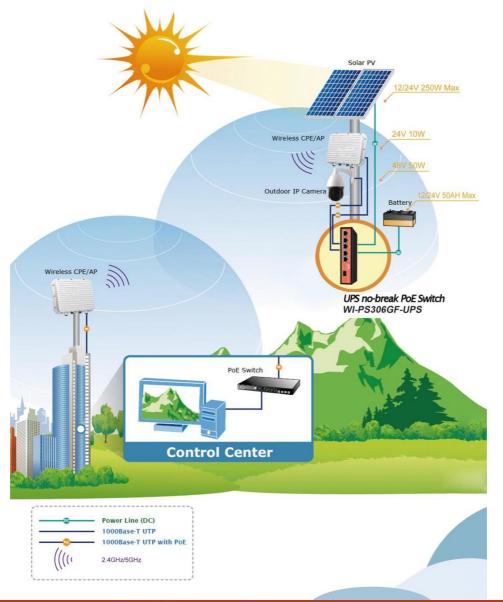



Port	MAX power	Voltage	Application	PIN
Port 1	60W	802.3af/at/bt 48V	Dome camera	1,2,4,5+ 3,6,7,8-
Port 2-3	30W	802.3af/at 48V	Bullet camera	1,2+ 3,6-
Port 4-5	30W	Passive 24V/802.3af/at 48V	Wireless Transmitor	1,2,4,5+ 3,6,7,8-



Ground: Ground port V+: For 12V Battery: DC 18-30V For 24V Battery: DC: 30-36V V-: For 12V Battery: DC 18-30V For 24V Battery: DC: 30-36V S+: For 12V Battery: 15-30V(12V standard) For 24V Battery: 30-44V(24V standard) S-: For 12V Battery: 30-44V(24V standard) For 24V Battery: 30-44V(24V standard) B+: Battery + Input 12/24V 50A Max B-: Battery - Input 12/24V 50A Max CPU 1/2s Flashing: CPU working properly 1/4s Flashing: Solar Charging VOUT On/Flashing: VOL output BOUT On/Flashing: Battery discharging

BIN On/Flashing: Battery charging

Battery Type Switch Button Q: Lead acid battery L: Lithium battery TP2: Battery temperature detector port

Battery 12/24V 50A Max And please use the solar panels to match it.

Description

What This Product Does

5GE+1SFP PoE Switch WI-PS306GF-UPS provides 5 10/100/1000Mbps ports and 1 SFP Fiber slots port, expanding your network flexibly. WI-PS306GF-UPS UPS system is designed specifically for 24V DC PoE equipment like that from Ubiquiti, Wi-Tek, Mikrotik etc and 48V PoE equipment like IP camera, VOIP Phone and wireless AP. The system provides continuous total PoE power on 5 switched PoE ports. Its inside battery controller maintains the proper charge on the batteries to prevent over charge and controls the load to prevent over discharge. Also Its inside solar controller and DC input port support utilize the solar capacity to extend the backup time(and can charge battery at same time).

This device provides you the ideal solution for CCTV/WISP UPS no break system.

Specification

HARDWARE FEA	HARDWARE FEATURES		
Interface	5 10/100/1000Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX) 1 1000Mbps SFP Slots		
Network Media	10BASE-T: UTP category 3, 4, 5 cable (maximum 100m) 100BASE-TX/1000Base-T: UTP category 5, 5e, 6 or above cable (maximum 100m) 1000BASE-X: MMF, SMF 1000Base-L X:62.5µm/50µm MM(2m~550m) or 10µm SMF(2m~5000m)		
Fan Quantity	Fanless		
Power Consumption	120W (max. with PoE device connected) 5W Max (without PoE output)		
DC Power Supply	For 12V Battery: DC 18-30V For 24V Battery: DC: 30-36V		
Solar Panel Input	For 12V Battery: 15-30V(12V standard) For 24V Battery: 30-44V(24V standard) 250W Max		
Battery Input	12/24V 50AH Max		
PoE Ports (RJ45)	Port1: 48V 802.3af/at bt PoE 60W (1245+, 3678-) Port 2-3: 48V 802.3af/at PoE 30W Port 4-5: 48V 802.3af/at PoE 30W or 24V Passive PoE 24W AUTO DETECT		
Exchange Capacity	12Gbps		

Packet Forwarding Rate	8.94Mpps
Mac Address Table	2К
Packet Buffer Memory	1Mb
Jumbo Frame	10240 Bytes
Dimensions	Product Size: 158mm* 142mm*35mm (L*W*H)
Protection Leve	Lightning protection 6KV 6KV ESD Contact discharge
Certification	CE, FCC, RoHS
Package Contents	POE Switch Electric Line Guide Book/Warranty Card
Environment	Working Temperature: $-20^{\circ}C \sim 60^{\circ}C$ Storage temperature : $-30^{\circ}C \sim 70^{\circ}C$ Working Humidity : $10\% \sim 90\%$ RH non-condensing Storage Humidity: $5\% \sim 90\%$ RH non- condensing



WIRELESS-TEK TECHNOLOGY LIMITED www.wireless-tek.com Email: sales@wireless-tek.com Technical Support: tech@wireless-tek.com

www.wireless-tek.com