



Televes reserves the right to modify the product

24V-5A power supply

For several modules

Flyback-type, high-power and high-performance (>85%) switched-mode power supply . Provides 5A at 24V (120W).


Ref.5629	196-264Vac	
	Art.Nr	UPSU120
	EAN13	8424450139295
Ref.563901	110Vac & UL Listed	
	Art.Nr	
	EAN13	8424450149751

Main features

- Equipped with two outputs monitored by LED diodes that indicate the status of the provided voltages
- Overload and short-circuit detection
- Maximum current limited to 4A per output
- Equipped with protection against output-voltage variation

Application example

(Click to see the picture)

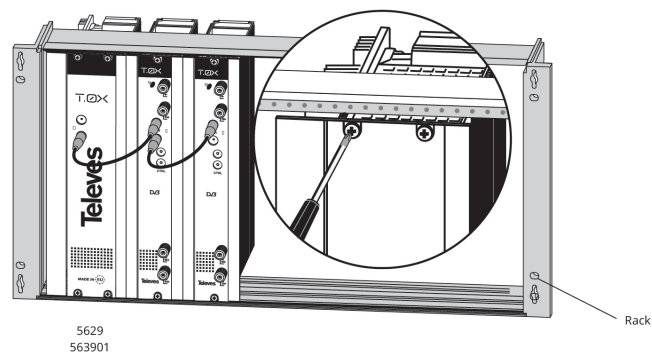

Rack mount.

Technical specifications

Mains frequency	Hz	50 / 60
Max. input current	(A~)	1,35 (5929) / 1,5 (593901)
Output voltage	(V=)	24
Max. output current	(A=)	5
Max. output power	W	120
Max. operating temperature	°C / °F	45 / 113
Protection index	IP	IP 20