



101 SERIES D-SUB SOLDER TYPE

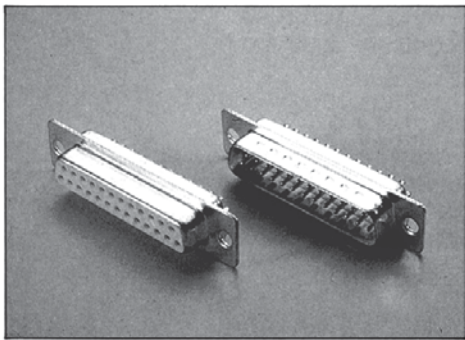

Contact Resistance: 30mΩ max. at DC 100mA
Insulator Resistance: 1000MΩ min. at DC 250V
Current Rating: 5 AMP

Dielectric Withstanding
Voltage: AC 1000V For 1 minute
Operating Temperature: -55°C ~ +105°C
Contact: MALE Brass
 FEMALE Brass
Housing: PBT & 30% Glass Fiber (UL 94V-0)

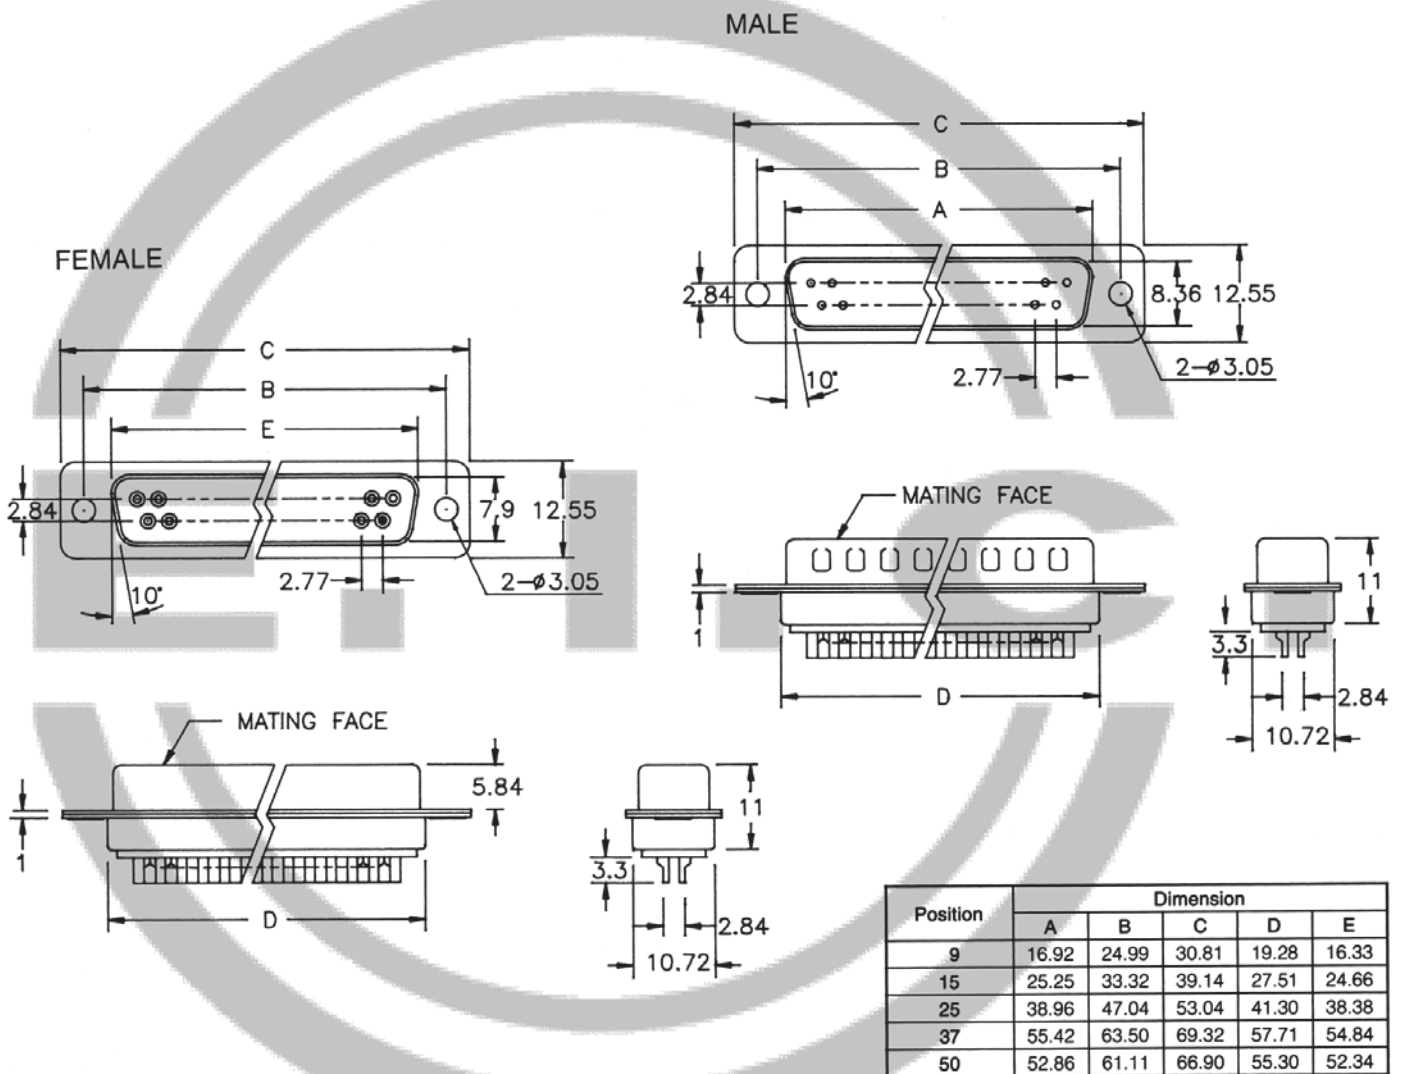

Ordering information

101 — 2 — 4 — 0 — XX — 1

2: Gold
 3: Half Gold

1: Zinc Shell/Blue
 2: Zinc Shell/White
 3: Tin Shell/Blue
 4: Tin Shell/White
 5: Tin Shell/Black

Position
 1: Male
 2: Female