

Unear M3000E Conference SpeakerPhone

M3000E




Key Features

- 4 directional microphones array. Easy to pick up sound from 5 meters distance.
- Five-level cascade technology.
- Hidden ports. Drive-Free. Keep your conference room neat.

Specifications

Microphone Specs	
Microphones	4-unit ECM directional microphone
Sensitivity	-37dB@f=1kHz, Pin=1Pa, 0dB=1V/Pa
S/N	70dB@f=1kHz, Pin=1Pa, A-Weighted
Effective Voice Pickup Range	4-5m radius
Speaker Specs	
Rated Output Power	4Ω/3W
Effective frequency range	217Hz~20KHz
THD (Total Harmonic Distortion)	≤5%
Volume	80±3dB (800,1000,1200,1500Hz) @1W/1m
Audio Specs	
Maximum Background Noise Suppression	18dB
Beam Forming	supported
Full-Duplex	Supports interrupting at any time,
Echo-Cancellation	Maximum echo coupling loss≥56dB
Reverberation Suppression	RT60<1s
AGC	Intelligent gain with a radius of 4 meters, cleaning the pickup
Cascade function	
Cascade Mode	POE network cable cascade
Number Of Cascade	≤5 units
Support System	
Windows/Linux/Mac	Supported
Input / Output	
USB Interface	USB2.0 Type-C
External power supply	DC 48V/0.6A or 5V/0.5A
Installation Method	
Desktop flap	Supported

Dimensions

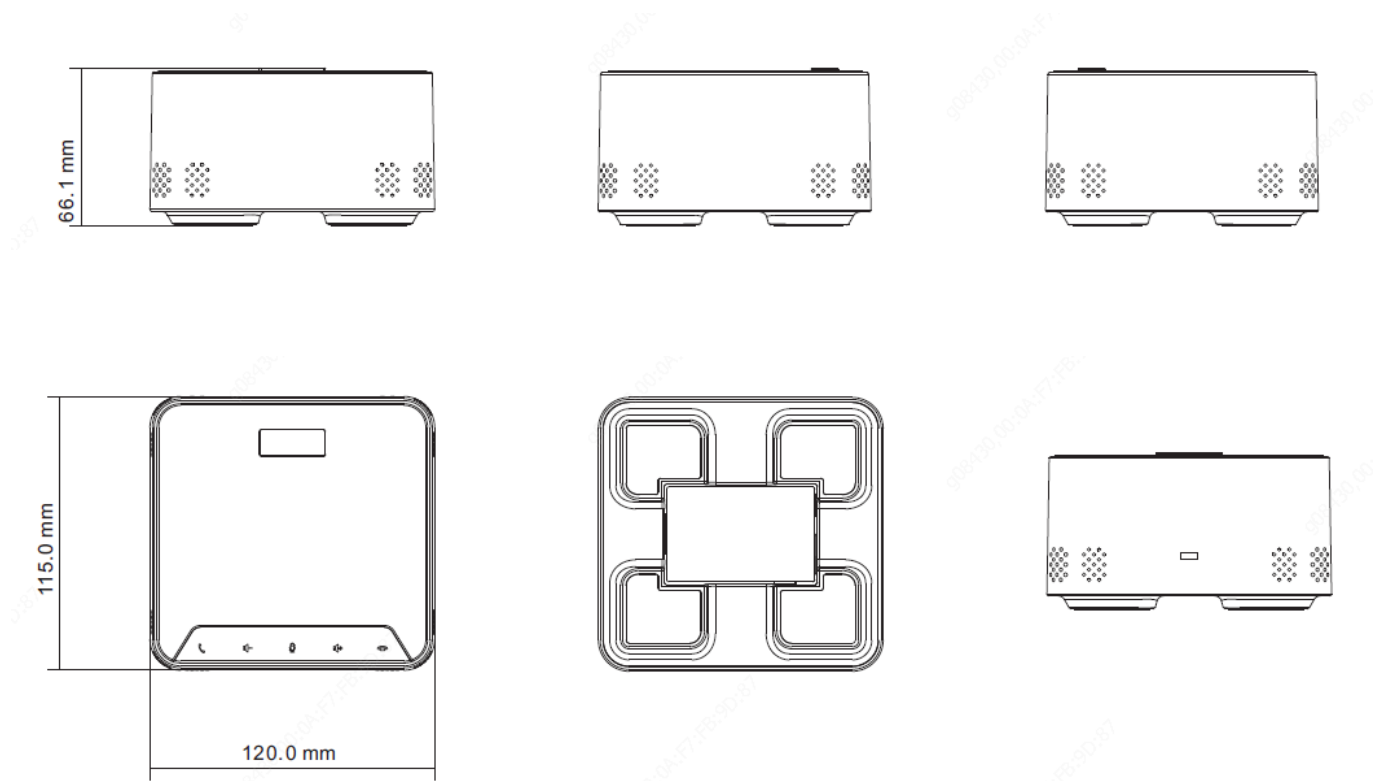

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China (310051)

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2022 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.