



Thermocassette HP

Discreet radiant heat cassette for recessed or surface mounting

Thermocassette is intended for discreet heating in offices, bathrooms, schools etc. Designed for either surface or recessed mounting it is well suited for total heating as well as for spot heating of for example a reception desk. Mounted in a false ceiling it is well protected against damage.

Recessed mounting make the heater an integral part of the ceiling.


- The low surface temperature (max. 100 °C) makes Thermocassette well suited for low ceiling heights. There is no risk of burns to the person(s) in this vicinity.
- Easy installation with 1,8 m cable and plug.
- High protection class, IP55.
- Complies with requirements of flammable areas according to SEMKO 111FF.
- Corrosion proof casing of hot zinc-plated and powder lacquered steel panels. Colour: white, RAL 9016, NCS S 0500-N.

Thermocassette HP (IP55)


Type	Heat output [W]	Voltage [V]	Amperage [A]	Max. surface temp. [°C]	LxBxH [mm]	Weight [kg]
HP3	300	230V~	1,3	100	593x593x80*	5,8
HP6	600	230V~	2,6	100	593x1193x80*	10,7

*) Height with brackets.


Installation height

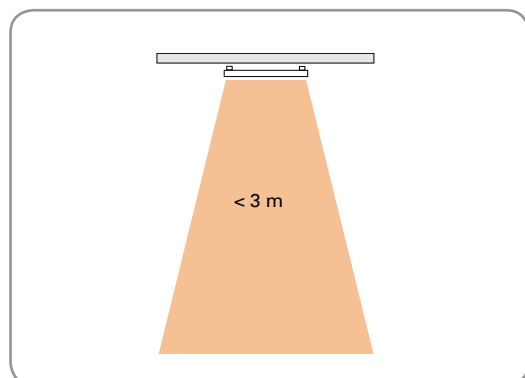

Minimum distances

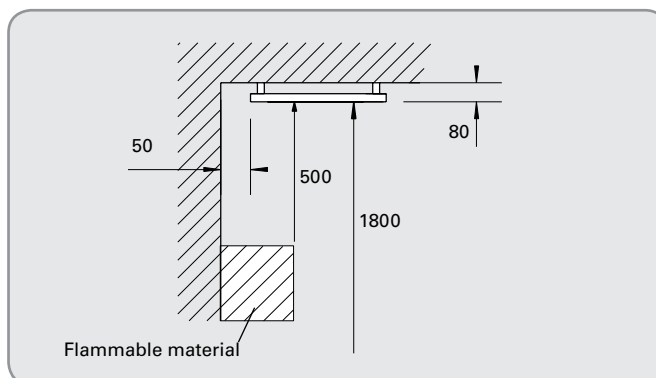

Dimensions

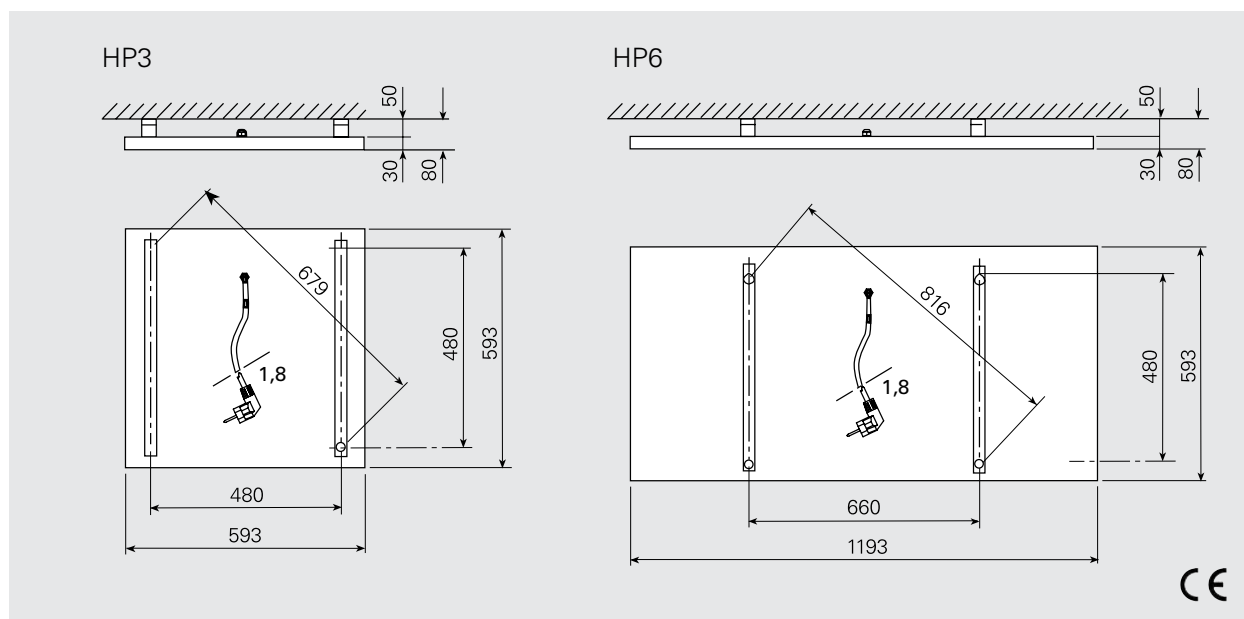


Mounting


HP can be recessed in false ceilings, mounted externally with brackets on the ceiling or suspended by wire. Mounting brackets are included. Wire mounting kit is available as an accessory.

Connection

HP is equipped with a 1,8 meter cable and plug.

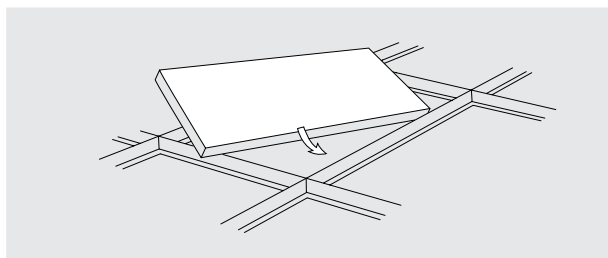

Accessories

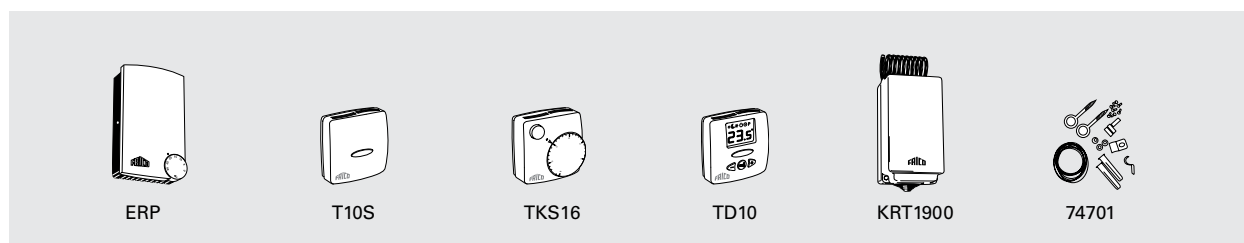

Type	Description	HxWxD [mm]
ERP	Electric heating control, IP20	153x94x43
ERPS	Electric heating control (slave), IP20	153x94x43
T10S	Electronic thermostat, IP30	80x80x31
TKS16	Electronic thermostat, knob, 1-pole switch, IP30	80x80x39
TD10	Electronic thermostat, display, IP30	80x80x31
KRT1900	Capillary-room thermostat, IP55	165x57x60
74701	Wire mounting kit	

For further information and options, see the "Controls" section.