



PRODUCT SPECIFICATION

GP Wall Charger Model : WA23

Revision History

Revision	Date	Initiator	Reason for Change
0.0	28 May 2017	CC Li	Preliminary release

Prepared By	Approved By
CC Li	Wilfred Kong
Date: 28 May, 2017	Date: 28 May, 2017


GPI International Limited

7/F, Building 16W, 16 Science Park West Avenue
Hong Kong Science Park, New Territories, Hong Kong,
Tel: (852) 2484 3333 Fax: (852) 24805912
Email: gpii@goldpeak.com
Website: <http://www.gpbatteries.com>

GP Batteries

Product Specification

Model no.: WA23

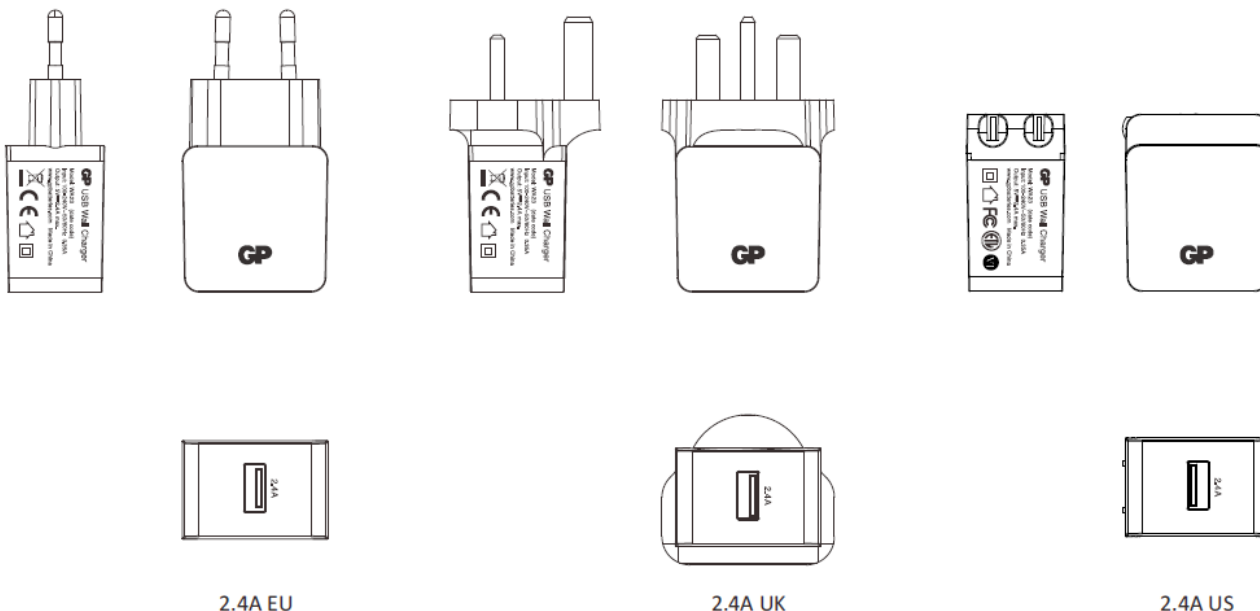

Product Name	: GP Wall Charger WA23
Description	: 2.4A single USB wall charger
Application	: Charge electronic device via USB output port
Input voltage & current	: 100-240VAC, 350mA Max.
Number of USB port	: 1
USB output voltage & current	: 5V DC, 2.4A
USB output power	: 12W
Over voltage protection (OVP)	: Yes
Over current protection (OCP)	: Yes
Short circuit protection (SCP)	: Yes
Over temperature protection (OTP)	: Yes
Operation Temperature	: 0°C to 40°C
Storage Temperature	: -30°C to 70°C
Product dimension (+/-0.5mm)	: 83.2 (L) x 42 (W) x 27 (H) mm for EU plug 71.5 (L) x 42 (W) x 27 (H) mm for US plug 81.5 (L) x 47.3 (W) x 41.2 (H) mm for UK plug
Weight	: 52g (approx.) for EU & US Plug 62g (approx.) for UK Plug
Approval	: CE
Compliance	: LVD, EMC, ROHS, REACH
Warranty Period	: 12 months from ex-factory date



Member
Gold Peak Group

Manufacturer reserves the right to alter or amend the design, model and specification without prior notice.