

Specification		Code:460-8600
Nominal Voltage	12V	
Watts(15min Rate)	99.8 Watts at 1.67V/cell	
Dimension	Length	166±2mm (6.54 inches)
	Width	175±2mm (6.89 inches)
	Container Height	125±2mm (4.92 inches)
	Total Height (with Terminal)	125±2mm (4.92 inches)
Approx Weight	Approx 8.6 kg (19.0lbs)	
Terminal	T3	
Container Material	ABS	
Rated Capacity	25.5 AH/2.55A	(10hr, 1.80V/cell, 25°C/77°F)
	24.0 AH/3.00A	(8hr, 1.80V/cell, 25°C/77°F)
	21.8 AH/4.37A	(5hr, 1.75V/cell, 25°C/77°F)
	19.3 AH/6.43A	(3hr, 1.75V/cell, 25°C/77°F)
	16.9 AH/16.9A	(1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	360A (5s)	
Internal Resistance	Approx 12mΩ	
Operating Temp.Range	Discharge	-15~50°C (5~122°F)
	Charge	0~40°C (32~104°F)
	Storage	-15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 7.2A.Voltage	
	14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%
Self Discharge	Leoch LPX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.	



Applications

- ◆ UPS (High rate)
- ◆ High power backup supply
- ◆ Emergency power supply
- ◆ Starting system
- ◆ Power tools
- ◆ Emergency lighting
- ◆ Electric starting



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	63.9	47.1	40.0	33.3	24.3	17.6	13.9	7.96	5.83	4.71	4.00	3.51	2.87	2.42	1.41
1.80V/cell	74.6	52.8	43.9	35.6	25.8	18.5	14.6	8.40	6.18	4.96	4.20	3.68	3.00	2.52	1.43
1.75V/cell	84.2	58.2	47.9	38.7	27.4	19.6	15.4	8.81	6.43	5.17	4.37	3.79	3.08	2.58	1.45
1.70V/cell	92.7	62.8	51.2	40.9	28.7	20.4	16.0	9.11	6.64	5.32	4.47	3.90	3.14	2.62	1.47
1.67V/cell	100.5	67.1	54.0	42.6	30.0	21.1	16.5	9.38	6.80	5.42	4.56	3.95	3.18	2.66	1.48
1.60V/cell	105.7	70.3	55.8	44.0	30.9	21.6	16.9	9.55	6.91	5.52	4.65	4.03	3.22	2.70	1.49

Constant Power Discharge (Watts/cell) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	118.8	88.4	75.8	63.6	46.8	34.1	27.1	15.6	11.5	9.35	7.98	7.02	5.76	4.87	2.84
1.80V/cell	137.3	98.5	82.8	67.8	49.5	35.8	28.3	16.4	12.2	9.82	8.34	7.35	6.01	5.06	2.88
1.75V/cell	153.2	107.6	89.9	73.3	52.3	37.6	29.8	17.2	12.6	10.2	8.67	7.55	6.15	5.17	2.91
1.70V/cell	166.8	115.1	95.4	77.1	54.6	39.0	30.9	17.7	13.0	10.5	8.84	7.74	6.25	5.23	2.94
1.67V/cell	178.9	121.9	99.8	79.8	56.7	40.2	31.8	18.2	13.3	10.6	8.99	7.82	6.32	5.29	2.95
1.60V/cell	185.0	126.1	102.1	81.7	58.0	41.0	32.5	18.5	13.5	10.8	9.13	7.94	6.38	5.35	2.97

Specifications subject to change without notice.


Dimensions

T3 Terminal


Unit: mm [inches]

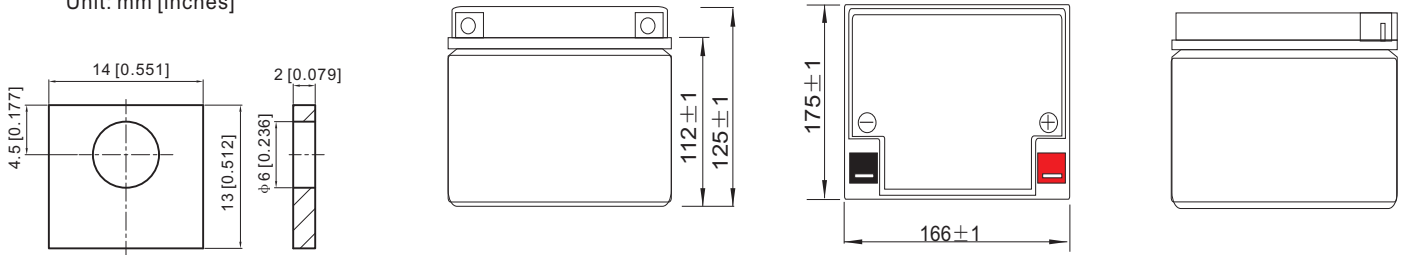


Discharge Characteristics

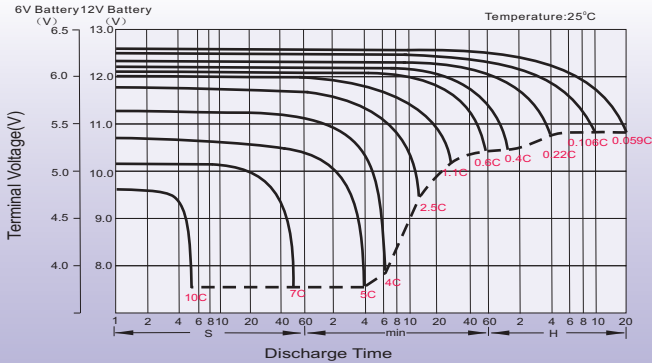


Float Charging Characteristics

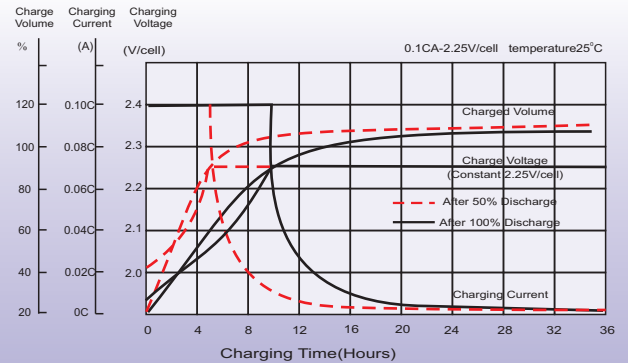


Temperature Effects in Relation to Battery Capacity

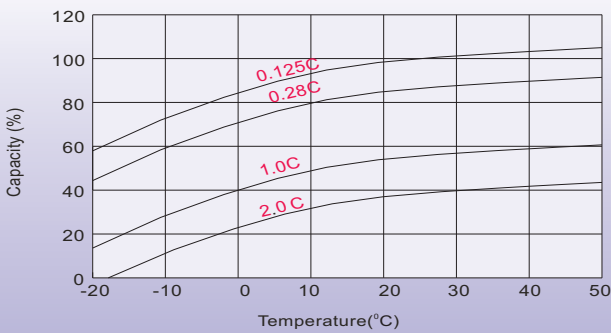

Effect of Temperature on Long Term Float Life

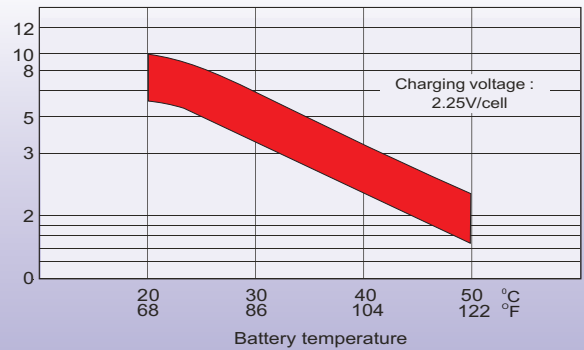

Self Discharge Characteristics

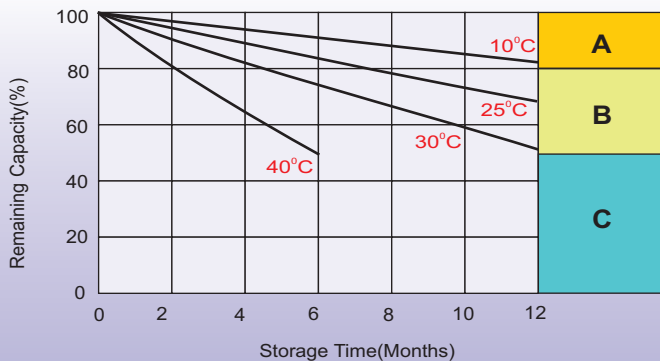

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

China sales office:

Add: 5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com
Http://www.leoch.com

HongKong sales office:

Workshop C, 33/F, TML Tower,
No. 3 Hoi Shing Road, Tsuen Wan,
New Territories, Hong Kong
Tel: +852 35786666
Fax: +852 21170016
E-mail: sales.hk@leoch.com

Singapore sales office:

Add: No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 68636079
Email sales.sg@leoch.com
Http://www.leoch.com

North America sales office:

Add: 19751 Descartes, Unit A,
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us
Http://www.leoch.com

Europe sales office:

Add: 9B Wheatstone Court. Waterwells
Business Park, Gloucester, GL2-2AQ,
UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 (0) 1452-690125
E-mail: Sales.Europe@leoch.com