

Specification

Code:460-8610

Nominal Voltage	12V
Watts(15min Rate)	150.0Watts at 1.67V/cell
Dimension	Length 195±1mm (7.68 inches)
	Width 130±1mm (5.12 inches)
	Container Height 164±2mm (6.46 inches)
	Total Height (with Terminal) 167±2mm (6.57 inches)
Approx Weight	Approx 10.2 kg (22.5lbs)
Terminal	T6
Container Material	ABS
Rated Capacity	33.5AH/3.35 A (10hr, 1.80V/cell, 25°C/77°F)
	32.9AH/4.11A (8hr, 1.75V/cell, 25°C/77°F)
	30.8AH/6.15A (5hr, 1.75V/cell, 25°C/77°F)
	28.6AH/9.54A (3hr, 1.75V/cell, 25°C/77°F)
	26.8AH/26.8A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	630A (5s)
Internal Resistance	Approx 7mΩ
Operating Temp.Range	Discharge : -15~50°C (5~122°F)
	Charge : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 10.5A. Voltage 14.4V~15.0V at 25°C (77°F) Temp. Coefficient -30mV/°C
Standby Use	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C (77°F) Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	CT series batteries may be stored for up to 6 months at 25°C (77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.



Applications

- ◆ UPS (High rate)
- ◆ High power backup supply
- ◆ Emergency power supply
- ◆ Emergency lighting
- ◆ Electric starting

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	102.3	73.7	59.1	49.4	37.9	28.3	22.6	12.7	9.04	7.06	5.85	5.01	3.93	3.26	1.72
1.80V/cell	118.2	82.7	65.2	53.7	40.7	29.9	23.8	13.2	9.31	7.28	6.02	5.15	4.03	3.35	1.75
1.75V/cell	132.8	89.9	70.3	57.2	42.7	31.2	24.7	13.5	9.54	7.46	6.15	5.25	4.11	3.41	1.79
1.70V/cell	144.0	96.6	74.9	60.5	44.6	32.3	25.5	13.9	9.7	7.60	6.27	5.37	4.20	3.48	1.82
1.67V/cell	156.0	103.3	79.1	63.6	46.4	33.3	26.2	14.2	10.0	7.78	6.41	5.48	4.31	3.54	1.85
1.60V/cell	166.8	109.2	82.7	66.6	48.4	34.4	26.8	14.6	10.2	7.98	6.58	5.63	4.40	3.62	1.90

Constant Power Discharge (Watts/Cell) at 25 °C (77°F)


F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	199.0	144.2	116.2	97.6	75.4	56.4	45.2	25.6	18.3	14.3	11.9	10.2	8.05	6.71	3.55
1.80V/cell	227.6	160.2	127.1	105.1	80.1	59.3	47.4	26.3	18.7	14.7	12.2	10.4	8.22	6.85	3.59
1.75V/cell	253.0	172.4	135.7	111.1	83.4	61.2	48.9	26.9	19.0	14.9	12.4	10.6	8.33	6.94	3.66
1.70V/cell	271.2	183.3	142.9	116.2	86.3	62.9	49.9	27.4	19.3	15.1	12.5	10.8	8.45	7.03	3.70
1.67V/cell	291.5	194.5	150.0	121.4	89.3	64.5	51.2	28.0	19.7	15.4	12.7	10.9	8.62	7.12	3.75
1.60V/cell	308.1	203.4	155.2	125.9	92.2	65.9	51.7	28.3	20.0	15.7	13.0	11.1	8.73	7.21	3.81

Specifications subject to change without notice.




Dimensions

T6 Terminal


Unit: mm [inches]




Unit: mm [inches]




Discharge Characteristics

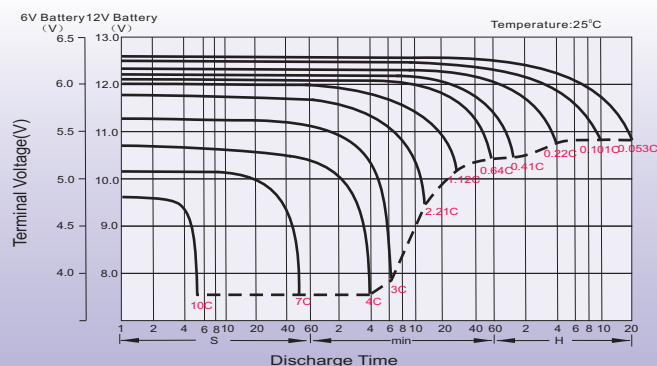



Float Charging Characteristics

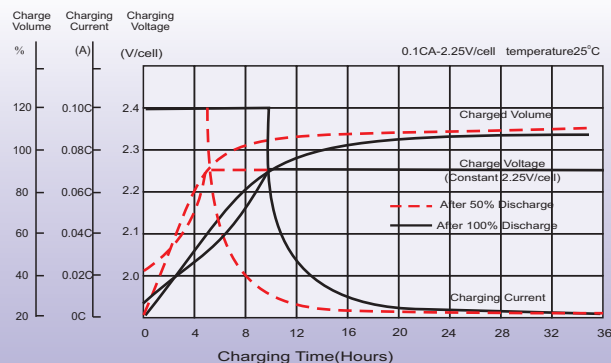

Temperature Effects in Relation to Battery Capacity

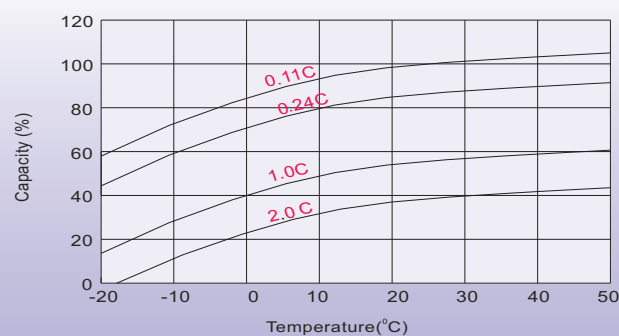

Effect of Temperature on Long Term Float Life

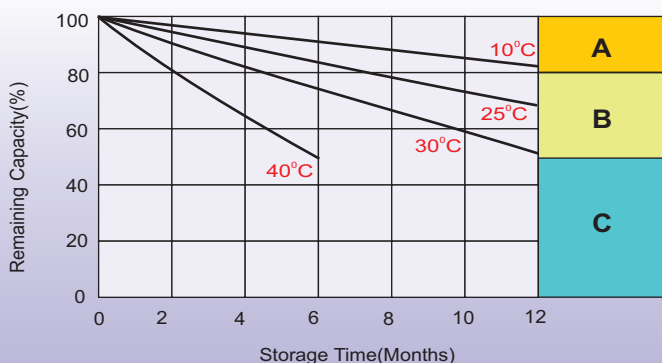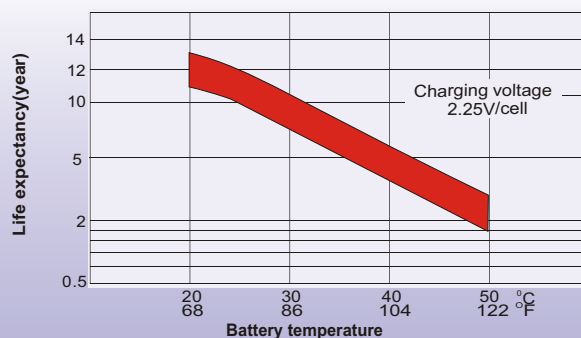

Self Discharge Characteristics

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
 1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
 2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
 3. Charged for 8~10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.

Sales Office

Finland and Baltic countries

Celltech Oy
Höyläamitie 11 A, 00380 Helsinki, Finland
TEL: +358 (0) 207 999 640
E-mail: info@celltech.fi
www.celltech.fi

Denmark

Celltech A/S
Lejrvvej 25, 3500 Værløse, Denmark
TEL: +45 7025 2201
E-mail: info@celltech.dk
www.celltech.dk

Norway

Staubo Elektro-Maskin AS
Bjørnerudveien 12 C, 1266 Oslo, Norway
TEL: +47 22 75 35 00
E-Mail: post@staubo.no
www.staubo.no